


S 型单级双吸中开蜗壳式离心泵

S TYPE SINGLE STAGE DOUBLE SUCTION SPLIT VOLUTE CENTRIFUGAL PUMP

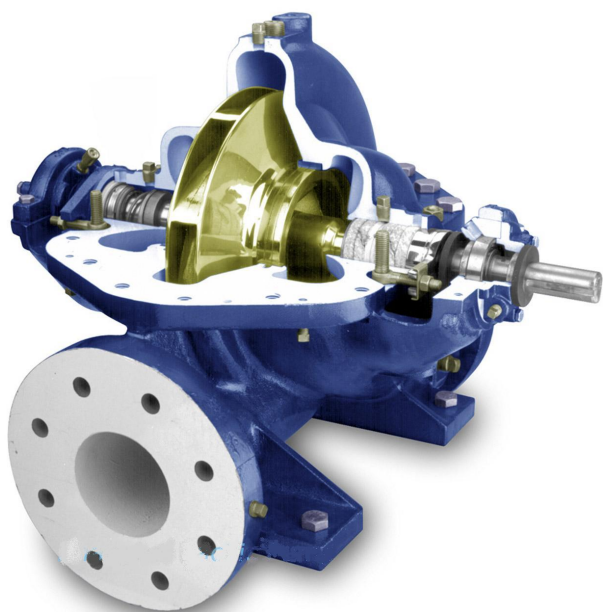

产品概述 OUTLINE OF PRODUCT

S 泵为单级双吸中开蜗壳式离心泵。主要适用于自来水厂、空调循环用水、建筑供水、灌溉、排水泵站、电站、工业供水系统、消防系统、船舶工业等输送液体的场合，符合标准 GB5657. Model S pumps are single-stage double-suction inter-opened spiral casing centrifugal pumps and used or liquid transportation for water works, air-conditioning circulation, building, irrigation, drainage pump station, electric power station, industrial water supply system, fire-fighting system, shipbuilding and so on.


泵的运行数据 DATA OF RUNNING

泵出口直径 DN: 80~800mm	Outlet diameter of pump DN:80~800mm
流量 Q: $\leq 11600\text{m}^3/\text{h}$	Capacity Q: $\leq 11600\text{m}^3/\text{h}$
扬程 H: $\leq 200\text{m}$	Head H: $\leq 200\text{m}$
工作温度 T: $\leq 105^\circ\text{C}$	Working Temperature T: $\leq 105^\circ\text{C}$
工作许用压力: $\leq 25\text{bar}$	Permitted working pressure: $\leq 25\text{bar}$
许用试验压力: $\leq 37.5\text{bar}$	Permitted testing pressure: $\leq 37.5\text{bar}$

结构特点 CHARACTERISTIC OF STRUCTURE

- 1、结构紧凑外形美观，稳定性好，便于安装。
 - 2、运行平稳优化设计的双吸叶轮使轴向力减小到最低限度，且有优异水力性能的叶型，并经精密铸造，泵壳内表面及叶轮表面极其光滑具有显著的抗汽蚀性能和高效率。
 - 3、轴承选用国产优质轴承或 SKF 及 NSK 轴承保证运行平稳，噪音低，使用寿命长。
 - 4、轴封选用国产优质密封或 BURGMANN 机械密封或填料密封。机械密封能保证 8000 小时运行无泄漏。
 - 5、安装匹配时不需调整，可根据现场使用条件。分立式或卧式安装。
1. Compact structure nice appearance, good stability and easy installation.
 2. Stable running the optimally designed double-suction impeller makes the axial force reduced to the minimum and has a blade style of very excellent hydraulic performance, both internal surface of the pump casing and the impeller's surface, being precisely cast, are extremely smooth and have a notable performance vapour-corrSion resisting and a high efficiency.
 3. Bearing use Chinese famous brand, SKF or NSK bearings to guarantee a stable running, low noise and long duration.
 4. Shaft seal use Chinese famous brand or BURGAMNN mechanical or stuffing seal to ensure a 8000h non-leak running.
 5. Mode of erection no adjustment needs in assembly and can be vertically or horizontally mounted upon the conditions of use on the spot.


型号意义 MODEL MEANING

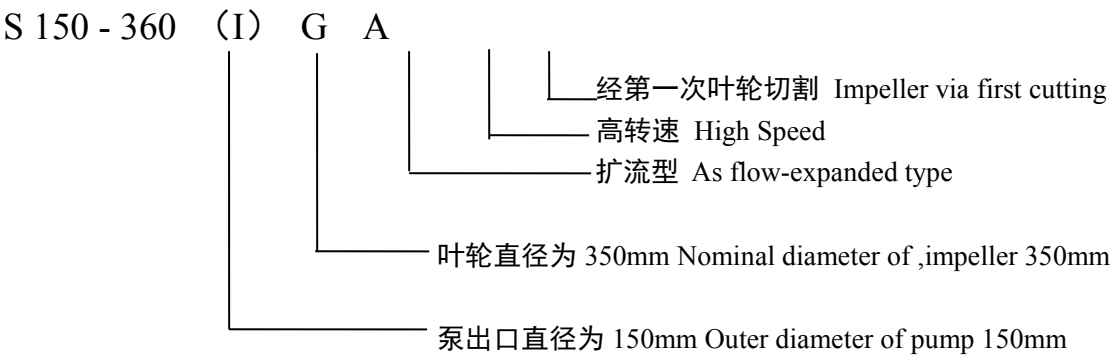

主要零件材料表 LIST OF PARTS' MATERIALS


零件名称 Part Name	材料名称 Material	GB 标准 GB Standard
泵壳 Pump Casing	灰铸铁 Grey Cast Iron 球墨铸铁 Ductalloy 铸钢 Cast Steel	HT250 QT400-18 ZG230-450
叶轮 Impeller	青铜 Bronze 灰铸铁 Grey Cast Iron 硅黄铜 Silicon Brass 不锈钢 Stainless Steel	ZCuSn10Pb1 HT250 ZCuZn16Si4 ZG1Cr18Ni9Ti
轴 Shaft	不锈钢 Stainless Steel 碳钢 Carbon Steel	2Cr13 45#
泵体密封环 Seal Ring of Pump Casing	青铜 Bronze 灰铸铁 Grey Cast Iron 硅黄铜 Silicon Brass 不锈钢 Stainless Steel	ZCuSn10Pb1 HT250 ZCuZn16Si4 ZG1Cr18Ni9Ti

S 型结构图 STRUCTURE DRAWING

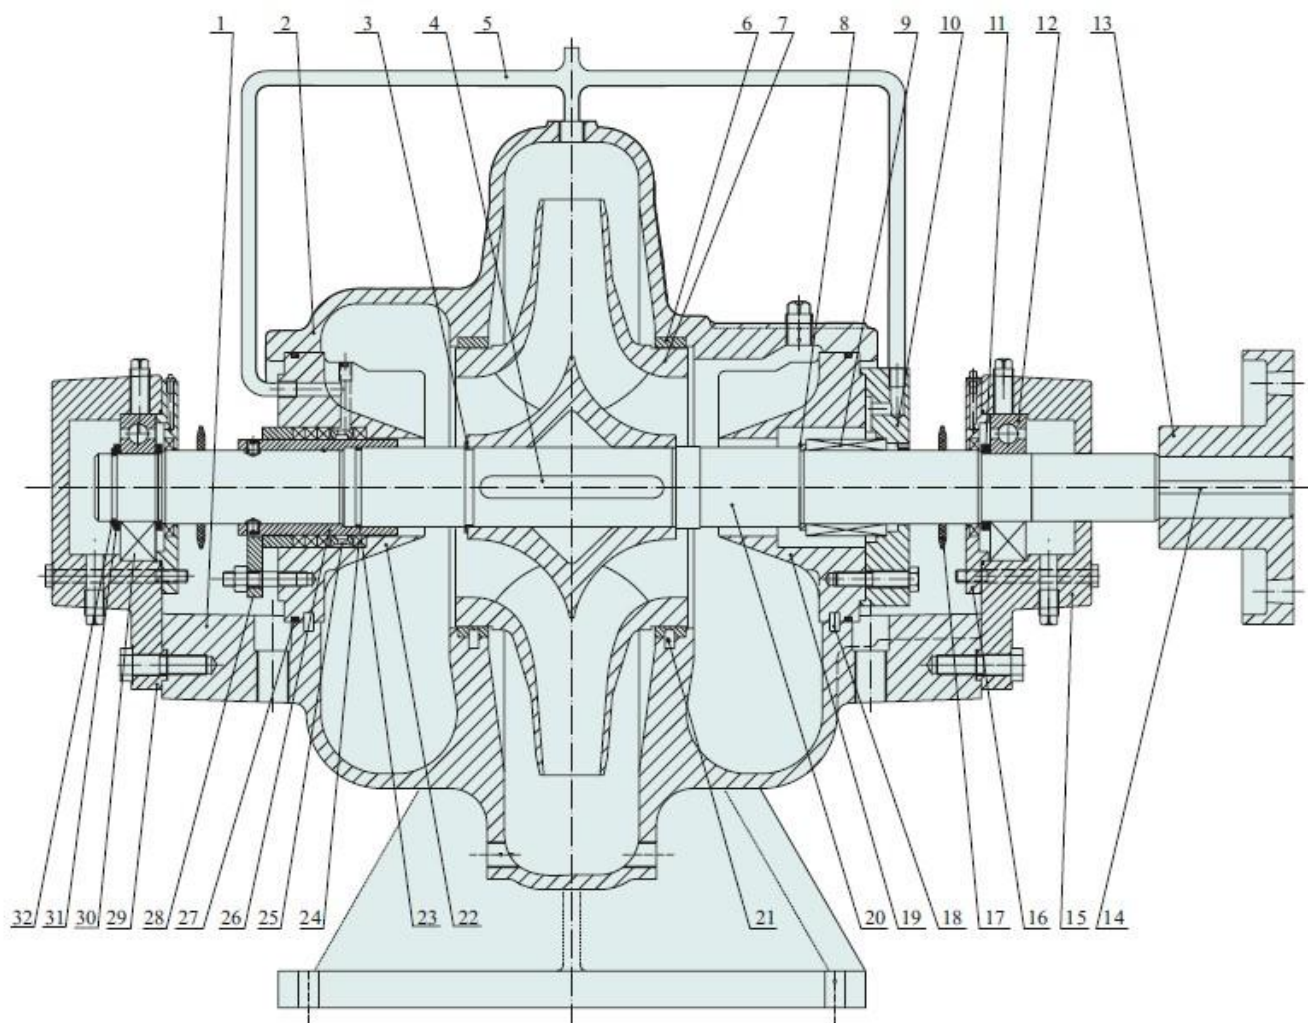


结构图 1 STRUCTURE DRAWING 1

1	泵 体 pump casing	8	机封挡圈 seal ring	15	轴承体甲 bearing body A	22	密封体(填料密封用) Seal body(for stuffing seal)	29	轴 承 体 乙 bearing body B
2	泵 盖 pump cover	9	机械密封 mechanical seal	16	轴承压盖 seal gland	23	O 型密封圈 O-seal ring	30	轴 承 bearing
3	轴用弹性挡圈 use elastic baffle	10	机械密封压盖 mechanical seal gland	17	挡水圈 water baffle	24	填料 stuffing	31	轴承挡圈 bearing baffle
4	键 key	11	轴用弹性挡圈 use elastic baffle	18	圆柱销 column pin	25	填料环 stuffing ring	32	轴用弹性挡圈 use elastic baffl
5	水冲洗管部件 water-rinsing pipe part	12	轴承 bearing	19	密封体(机械密封用) Seal body(Mechanical seal)	26	填料轴套 stuff muff		
6	密封环 seal-ring	13	泵 联 pump linkage	20	轴 shaft	27	O 型密封圈 O-seal ring		
7	叶 轮 impeller	14	键 key	21	圆柱销 column pin	28	填料压盖部件 packing gland part		

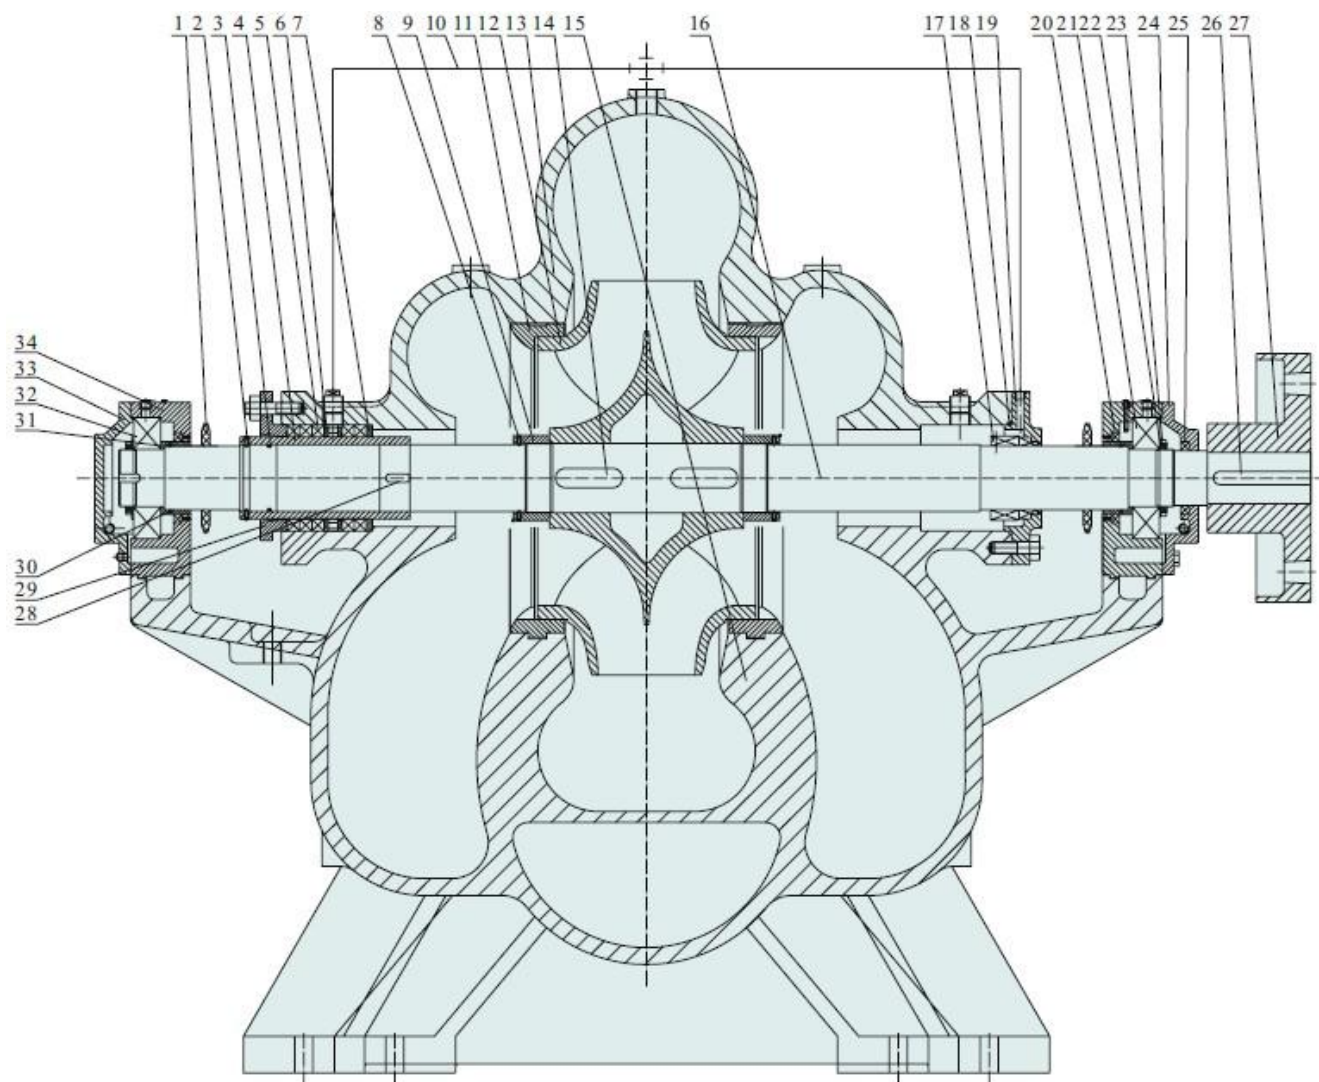

结构图 2 STRUCTURE DRAWING 2



1	挡水圈 water baffle	9	叶轮螺母 Impeller nut	17	机械密封 mechanical seal	25	骨架油封 oil-seal o rame	33	轴承压盖乙 seal gland B
2	内六角凹端紧定螺钉 Inner-hexangular concave end stress screw	10	水封管部件 water-sealing pipe part	18	O形密封圈 O-seal ring	26	键 key	34	轴承体 bearing body
3	O形密封圈 O-seal ring	11	密封环 seal-ring	19	机械密封压盖 mechanical seal gland	27	泵联轴器 pump bearing gland		
4	填料轴套 stuff muff	12	叶轮 Impeller	20	骨架油封 oil seal of frame	28	键 key		
5	填料 stuffing	13	泵盖 pump cover	21	轴承 bearing	29	填料压盖 stuffing gland		
6	填料环 stuffing ring	14	键 key	22	垫圈 washer	30	O形密封圈 O-seal ring		
7	填料挡套 stuffing baffle	15	泵体 pump casing	23	圆螺母 round nut	31	轴承挡套 bearing baffle		
8	内六角凹端紧定螺钉 Inner-hexangular concave end stress screw	16	轴 (机械密封用) Shaft(Mechanical seal)	24	轴承压盖甲 bearing gland A	32	轴承 bearing		

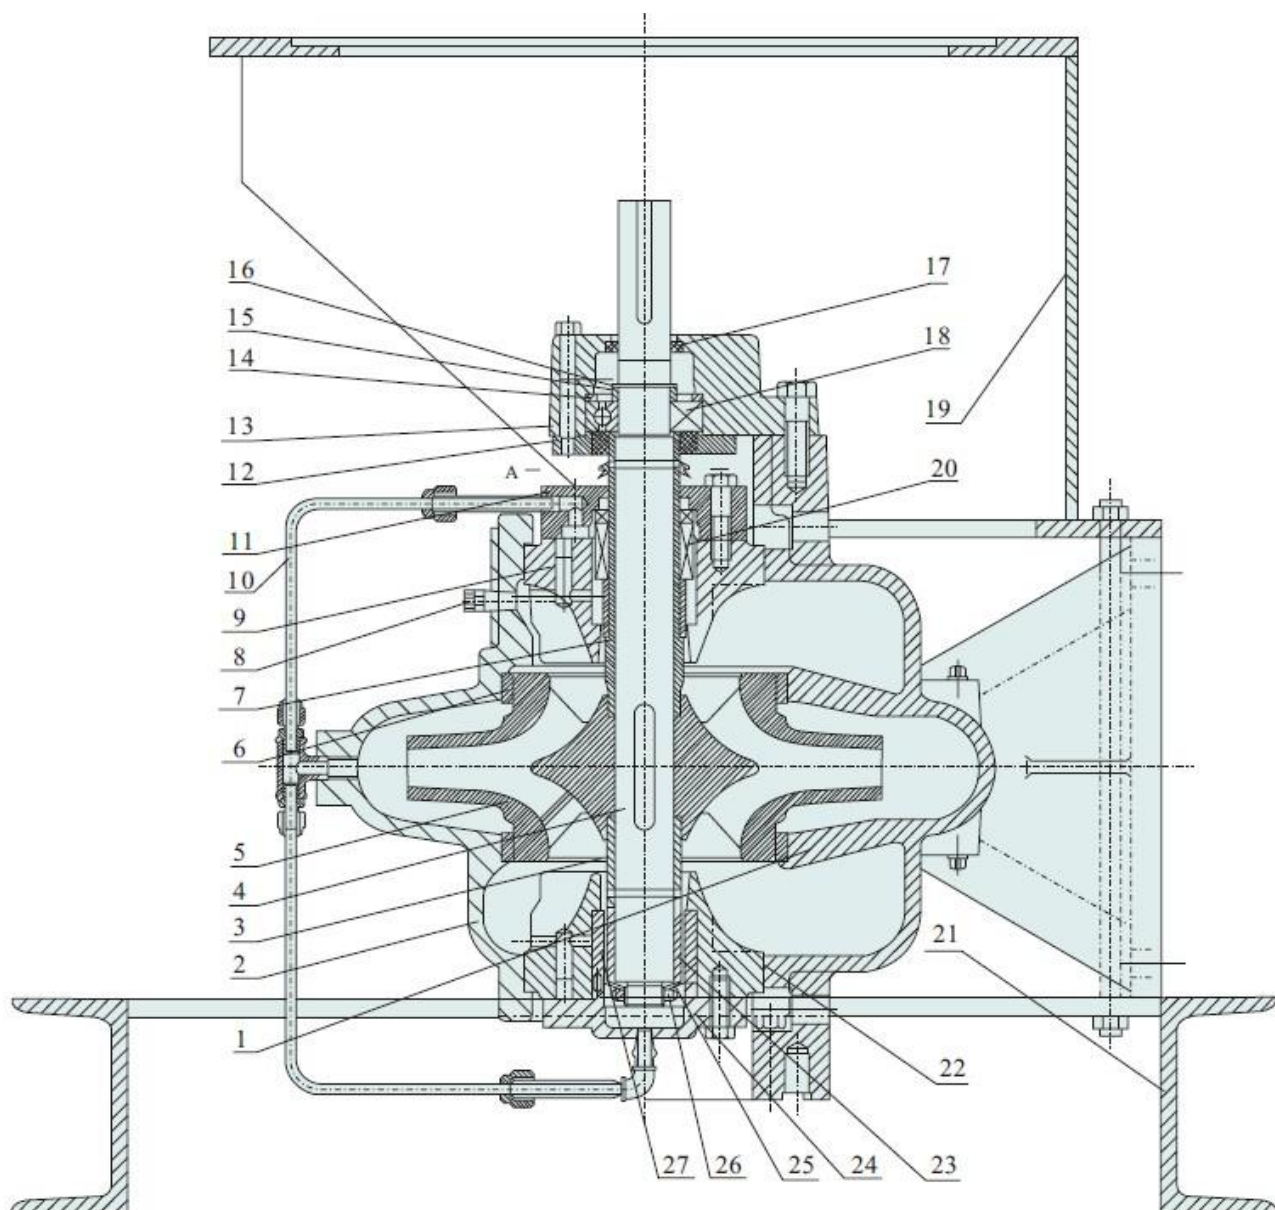


结构图 3 STRUTURE DRAWING 3

1	泵体 pump casing	6	密封环 seal-ring	11	密封压盖或填料压盖 seal gland or stuffing gland	16	弹性挡圈 elastic baffle	21	底座 foundation	26	锁紧螺母 locking nut
2	泵盖 pump cover	7	轴套 Nuff	12	轴承压盖 bearing gland	17	骨架油封 oil-seal of frame	22	O型密封圈 O-seal ring	27	水导轴承 water-guide bearing
3	下轴套甲 lower nuff A	8	放气塞 deflating chamber	13	轴承体 bearing body	18	轴承 bearing	23	下轴套乙 lower muff B		
4	轴 shaft	9	密封体 sealing body	14	轴承垫圈 bearing washer	19	电机支架 motor stand	24	水导轴承压盖 water-guide bea- ring gland		
5	叶轮 impeller	10	水冲洗管部件 water-rinsing pipe part	15	轴承挡圈 bearing baffle	20	机械密封或填料密封 mechanical seal or stuffing seal	25	蝶形弹簧 butterfly-type spring		

S 型谱图 S PERFORMANCE CHART

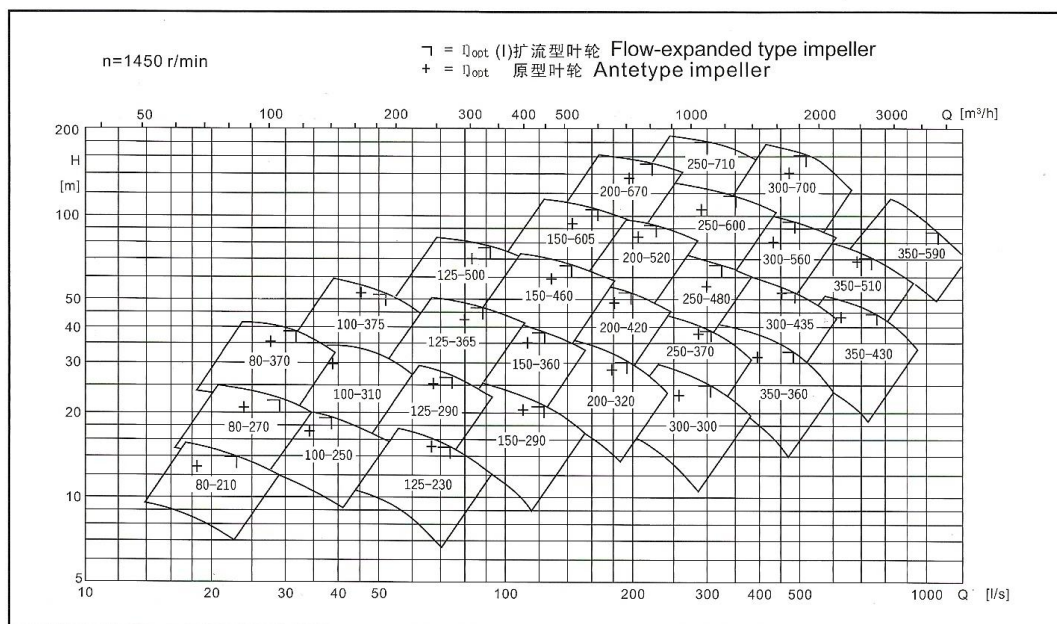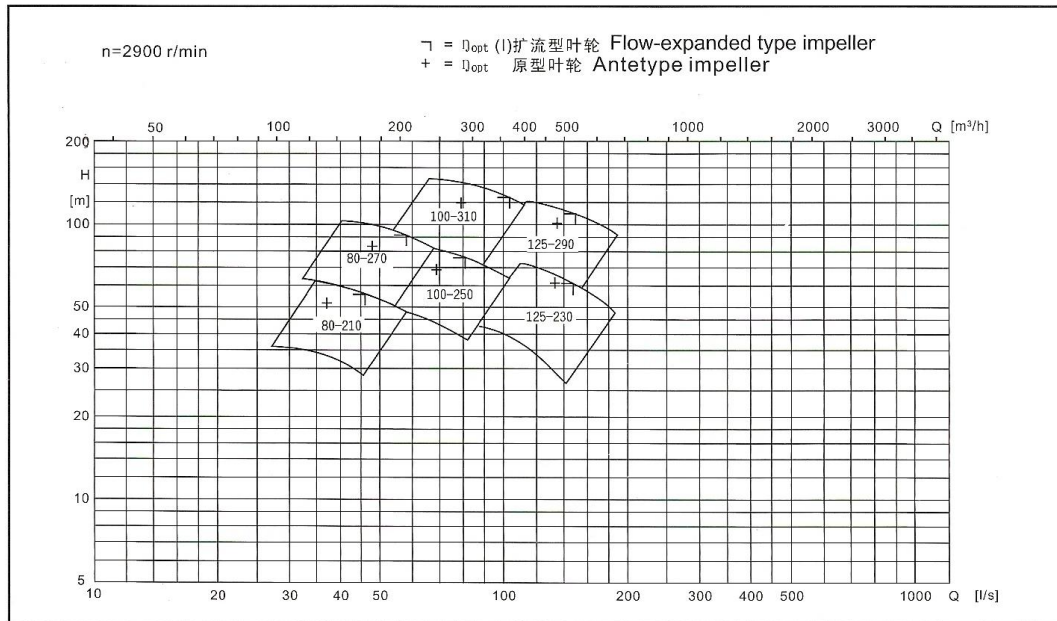

注：可根据要求设计及提供超出标准性能范围的产品。Other performance pumps can be designed by orders

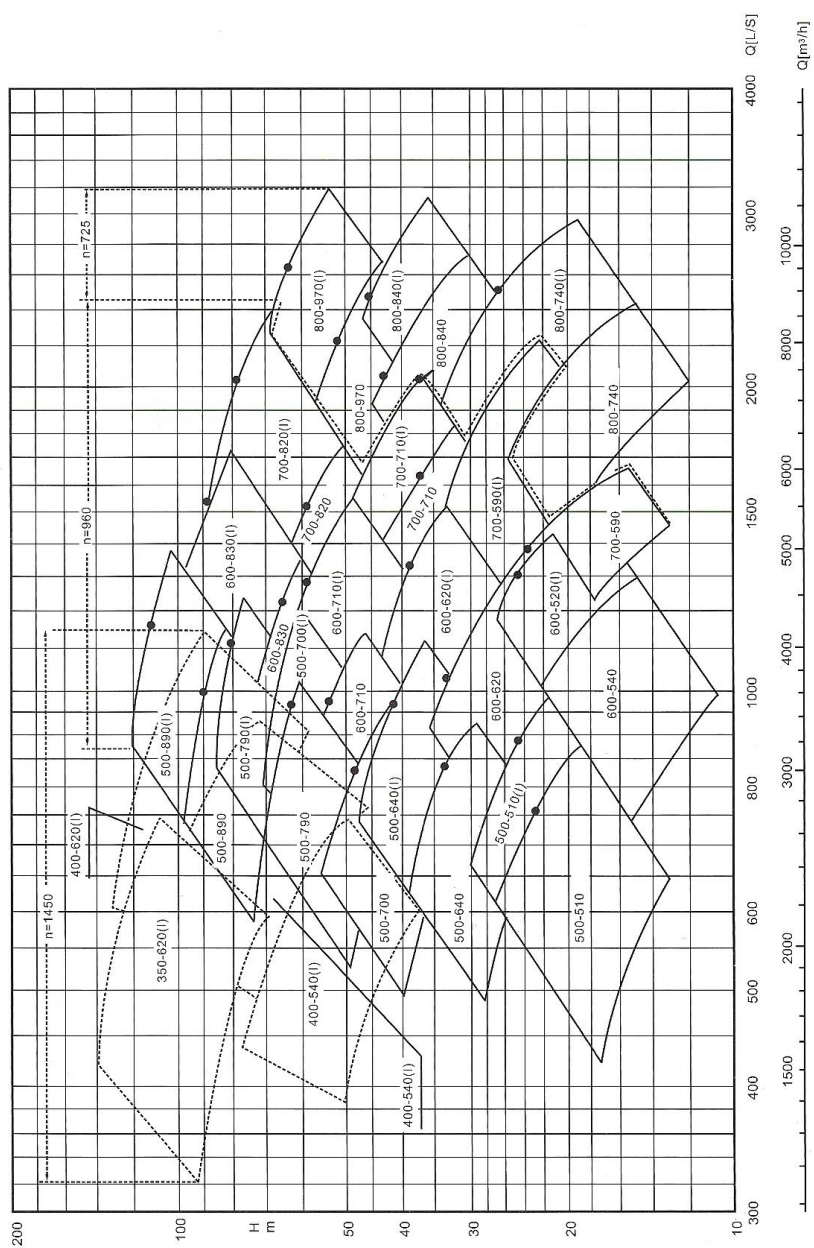


S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
80-210(I)G	131	36.4	60.5	2900	26.8	80.6	5.1	37	215
	164	45.6	55		29.9	82.0			
	197	54.6	50		33.4	80.2			
	121	33.6	52		21.6	79.3	4.6	30	200
	151	42	47.5		24.1	81.0			
	181	50.4	42.2		26.1	80			
	115	32	44		17.8	77.8	4.5	30	185
	144	40	39		19	80.5			
	173	48	35		21.1	78			
	110	30.6	37		14.7	75.3	4.3	22	170
	137	38	33.5		16	77.8			
	164	45.6	27.7		16.7	74			
80-210(G)	107	29.7	55.5	2900	20.5	79	4.0	30	215
	134	37.1	51		22.9	81			
	160	44.5	46		25.1	80.1			
	106	29.4	47.7		17.6	78.2	4.0	30	200
	133	36.9	43.5		19.3	80			
	159	44.2	37		20	80.1			
	100	27.8	40		14.4	75.5	3.7	22	185
	124	34.5	36		15.6	78.2			
	149	41.4	30		16.5	74			
	91	25.2	35		12.1	71.5	3.5	18.5	170
	113	31.5	31		12.9	74			
	136	37.6	27		13.9	72			
80-210(I)	66	18.3	15	1450	3.4	80.5	2.1	5.5	215
	83	23.1	13.8		3.8	82			
	100	27.8	12.2		4.2	79.5			
	61	16.9	13		2.7	79	2.1	4.0	200
	76	21.1	11.8		3.0	81			
	90	25	10.5		3.3	79.7			
	58	16.1	11		2.2	78	2.1	3.0	185
	72	20	9.8		2.4	80.5			
	87	24.2	8.7		2.6	78			
	55	15.3	9.1		1.8	76	2.1	3.0	170
	69	19.2	8.2		2.0	78			
	83	23.1	7		2.1	75			
	52	14.5	14.2		2.6	78	2.2	4.0	215
	65	18.1	12.8		2.8	81			

80-210	78	21.7	10.0	1450	3.1	80.2	2.1	4.0	200
	52	14.4	12		2.1	78.5			
	64	17.8	11.8		2.6	80			
	77	21.4	11.7		3.1	78			
	50	13.9	10		1.8	76	2.1	3.0	185
	61	17	9		1.9	78			
	73	20.3	7.8		2.0	76.2			
	47	13.1	8.7		1.5	70			
	58	16.1	7.6		1.6	74	2.1	2.2	170
	70	19.4	6.5		1.8	71			

安装外形尺寸图 INSTALLATION DIMENSION

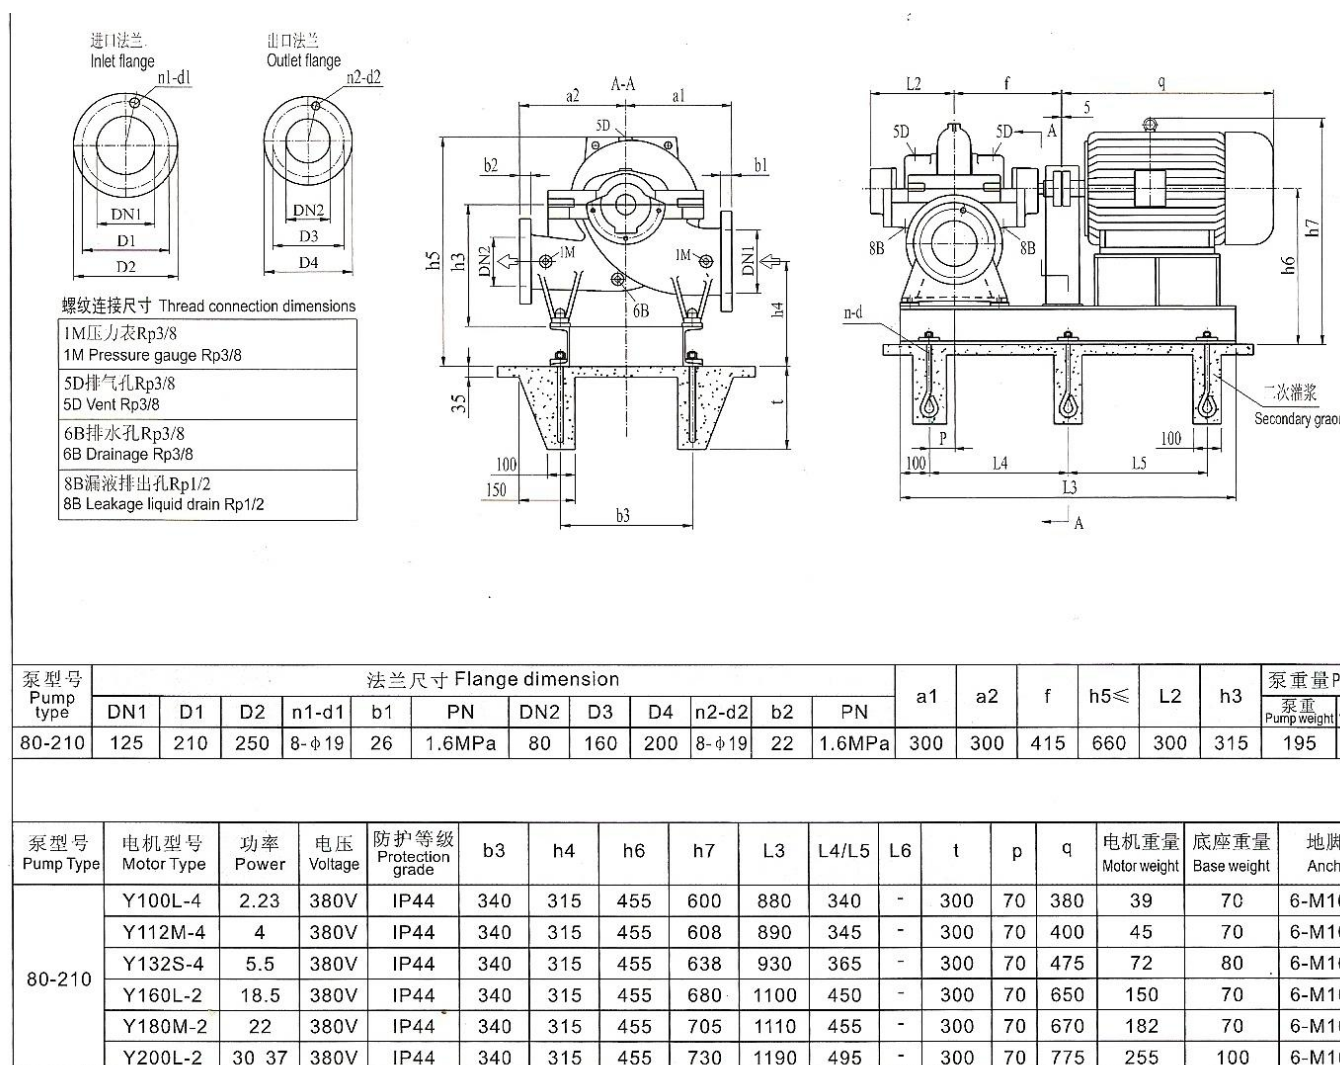


S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
80-270(I)G	166	46.1	97.5	2900	57	77.2	7.0	75	275
	207	57.5	90		64.6	78.5			
	248	69	79		70.8	75.5			
	156	43.2	83.5		46.6	76	6.0	75	255
	194	54	77		52.6	77.5			
	233	64.8	69		26.1	80			
	147	40.8	70		37.5	74.7	5.3	55	235
	184	51	63.5		41.8	76			
	220	61.2	55		44.6	74			
	138	38.4	56.5		28.7	74.2	5.0	37	215
	173	48	50		31.4	75			
	198	55	45		32.8	74			
80-270G	137	38	91	2900	44.6	76.1	7.3	75	275
	171	47.5	82.5		49.9	77			
	205	57	72.5		54.1	75			
	122	34	79.5		35.6	74.4	6.0	55	255
	153	42.5	71.5		39.1	76.2			
	184	51	67		44.7	76			
	115	31.9	66.8		28.5	73.7	5.5	37	235
	144	40	60		31.3	75.2			
	173	48.1	53		33.7	74.2			
	110	30.6	54.5		22.4	72.5	5.4	30	215
	137	38.1	49		24.5	74.4			
	164	45.6	42		25.9	72.5			
80-270(I)	83	23.1	24	1450	7.0	77.5	2.8	11	275
	104	28.9	22.5		8.1	78.5			
	125	34.7	19.5		8.8	75			
	80	22.2	21.3		6.1	75	2.7	11	255
	99	27.8	19		6.6	78			
	120	33.3	17		7.4	74.5			
	72	20	17.5		4.6	74.5	2.5	7.5	235
	90	25	16		5.2	76			
	108	30	13.7		5.4	74			
	67	18.6	13.8		3.4	74	2.5	5.5	215
	84	23.3	13		4.0	75			
	100	27.8	11.5		4.3	73.2			
	68	18.9	23.1		5.7	75.8	2.4	7.5	275
	85	23.6	20.7		2.8	77			

80-270	102	28.3	18.2	1450	6.7	75.4	2.2	7.5	255
	61	16.9	20		4.5	74.5			
	77	21.4	18.1		5.0	76			
	92	25.5	16		5.3	75	2.1	5.5	235
	58	16.1	16.5		3.5	73			
	72	20	15		3.9	75			
	86	23.9	13.2		4.2	74	2.1	4.0	215
	53	14.7	13.8		2.7	72			
	67	18.6	12.5		3.1	74			
	80	22.2	10.8		3.2	73			

安装外形尺寸图
 INSTALLATION DIMENSION

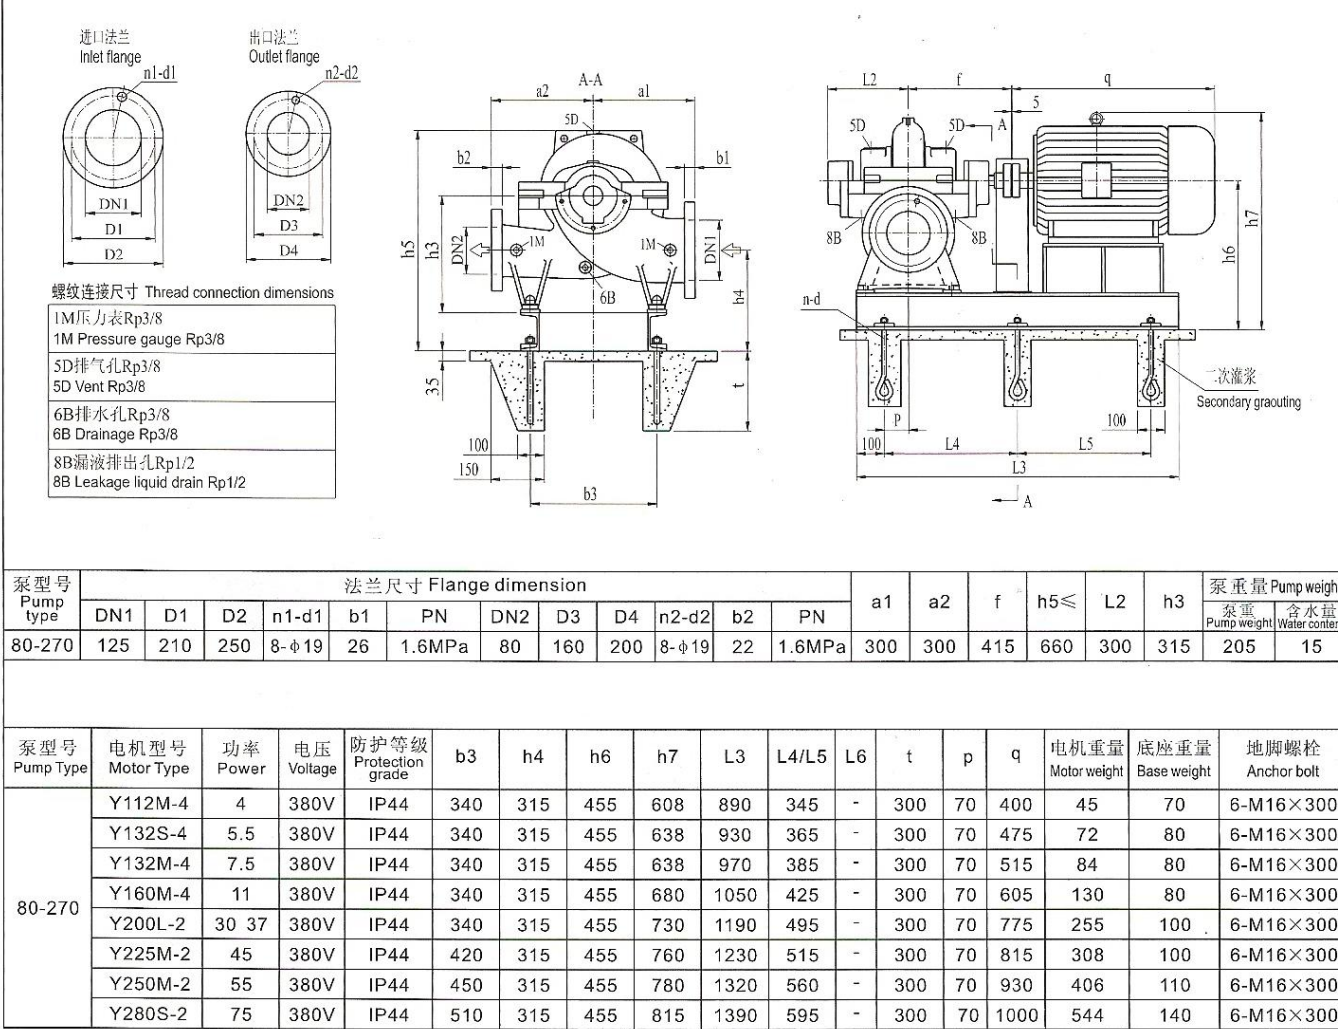


S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
100-250(I)G	230	64	83	2900	64.2	80.7	9.0	90	254
	288	80	75		70.9	83			
	346	96	67		78.4	80.5			
	219	60.8	69		51.9	79.3	9.5	75	236
	274	76	63		58.3	80.5			
	328	91.2	55		62.3	79			
	209	58	59		43.5	77.2	9.7	55	219
	261	72.5	52		46.8	79			
	313	87	46.5		51.5	77			
	193	53.6	49		33.9	76	9.7	45	201
	240	66.7	45		37.7	78			
	290	80.6	37		39.2	74.5			
100-250G	196	54.5	75	2900	50	80	8.6	75	254
	245	68	68		55.6	81.5			
	294	81.6	59		59.8	79			
	180	50	65		40.6	78	7.8	55	236
	223	62	59		44.7	79.5			
	268	74.4	51		47.9	77			
	165	45.8	56		32.9	76.5	7.4	45	219
	205	57	51		36.8	77.5			
	246	68.4	44		38.8	76			
	150	41.7	48		26.4	75	7.1	37	201
	190	52.8	43		29.1	76			
	227	63	38		31.1	75.5			
100-250(I)	115	31.9	21.2	1450	8.2	80.7	2.9	11	254
	144	40	18.8		8.9	83			
	173	48.1	17.5		10	81.7			
	112	31	17.5		6.7	79	2.9	11	236
	140	38.8	15.8		7.4	81			
	167	46.5	13.2		7.7	77			
	100	27.8	14.5		5.1	77.8	2.9	7.5	219
	126	35	13.5		5.9	79			
	150	41.7	11.9		6.3	77.6			
	97	26.8	12.2		4.2	75.5	2.9	7.5	201
	120	33.8	11.2		4.7	77.5			
	145	40.2	9.5		5.0	75.5			
	98	27.2	18.8		6.2	80.5	2.4	11	254
	122	33.9	17		7.0	81.5			

100-250	147	40.8	15	1450	7.6	79.5	2.3	7.5	236
	90	25	16.3		5.1	78			
	112	31.2	14.5		5.6	79.5			
	135	37.4	12.7		6.0	77.2	2.2	7.5	219
	85	23.6	13.7		4.1	77			
	106	29.4	12.5		4.7	78			
	128	35.5	11.3		5.3	75	2.1	5.5	201
	75	20.8	12.1		3.3	75			
	94	26.1	11		3.7	76			
	113	31.4	9.6		3.9	75.2			

安装外形尺寸图 INSTALLATION DIMENSION

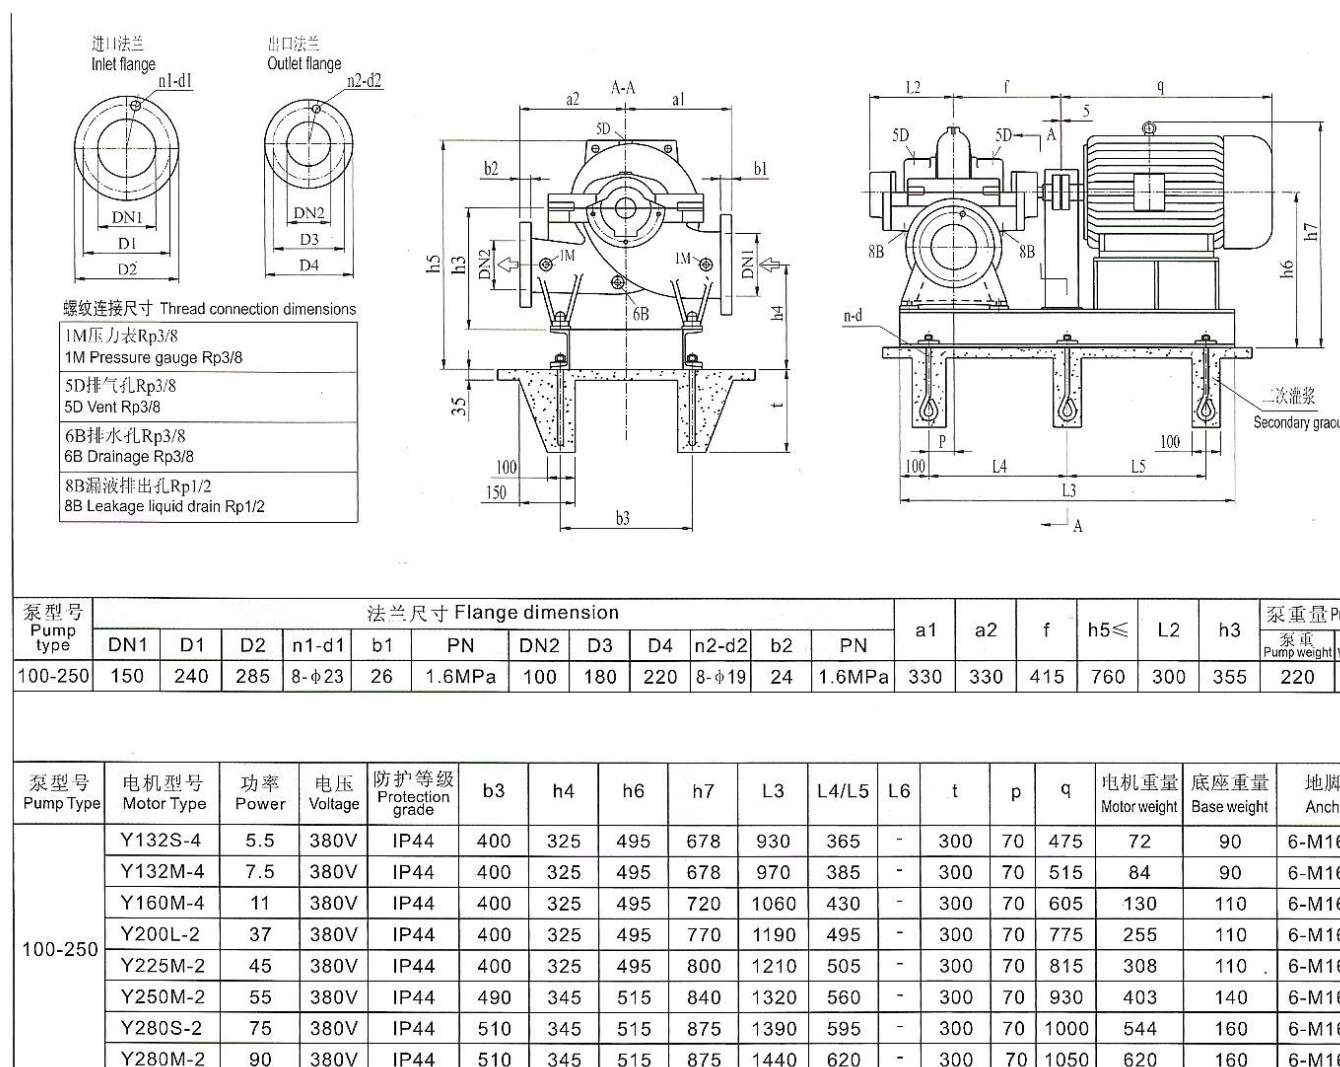


S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
100-310(I)G	294	81.6	135	2900	137.7	78.5	13.7	200	325
	367	102	123		153.8	80			
	440	122.2	105		164	76.8			
	268	74.4	116		108	78.3	12.2	160	301
	335	93	106		121.4	79.6			
	402	111.7	92		131	77			
	242	67.2	98		82.7	78.1	10.7	110	278
	302	83.9	90		93.5	79.3			
	363	100.8	80		102.5	77.2			
	182	50.5	82		52.8	77	9.2	90	254
	227	77	74		70.7	78.3			
	333	92.4	65.5		78.1	76			
100-310G	226	62.8	130	2900	105	76.5	10.2	132	325
	283	78.5	119		117.4	78			
	340	94.4	105		128.5	75.5			
	208	57.8	111		81.8	76.3	9.5	110	301
	260	72.2	103		93.7	77.6			
	310	86.1	90		100	76			
	200	55.6	92		65.8	76.1	9.0	90	278
	250	69.3	84		73.8	77.3			
	300	83.3	74		80.5	75			
	187	52	78		53.1	75	8.5	75	254
	234	65	69		57.1	77			
	281	78.1	60		61.2	75			
100-310(I)	148	41.1	34	1450	17.4	78.5	3.1	22	325
	185	51.3	31		19.6	80			
	222	61.7	26.8		21	77.5			
	133	36.8	29.3		13.4	79	2.7	18.5	301
	166	46.1	27		15.3	79.6			
	200	55.6	24.3		17	77.4			
	120	33.3	24.8		10.5	78	2.5	15	278
	151	41.9	22.5		11.7	79.3			
	180	50	20		12.8	77.4			
	112	31.2	20.2		7.9	77.8	2.3	11	254
	140	38.9	18.5		9.0	79			
	162	44.9	16.2		9.2	78			
	112	31.2	32.5		13	76.6	2.7	18.5	325
	140	38.9	29.5		14.1	78			

100-310	168	46.7	25	1450	15.5	74	2.5	15	301
	106	29.4	27.5		10.4	76.6			
	133	37	25.5		11.6	77.6			
	160	44.4	22		12.8	75	2.4	11	278
	100	27.8	23		8.2	76.2			
	124	34.4	21.2		9.0	77.3			
	150	41.7	18		9.8	75	2.3	11	254
	94	26.1	19.4		6.5	76.5			
	117	32.5	17		6.9	77			
	140	38.9	15		7.6	76			

安装外形尺寸图 INSTALLATION DIMENSION

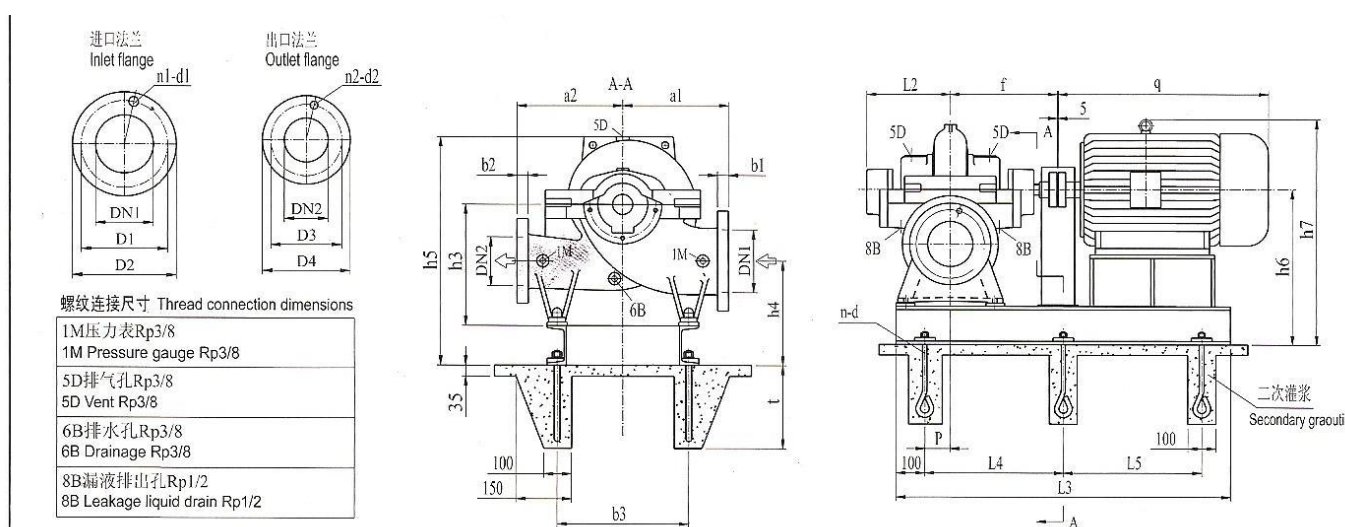

泵型号 Pump type	法兰尺寸 Flange dimension												a1	a2	f	h5≤	L2	h3	泵重量 Pur	
	DN1	D1	D2	n1-d1	b1	PN	DN2	D3	D4	n2-d2	b2	PN							泵重 Pump weight	重量 Weight
100-310	150	240	285	8-φ23	26	1.6MPa	100	180	220	8-φ19	24	1.6MPa	330	330	415	760	300	355	236	


泵型号 Pump Type	电机型号 Motor Type	功率 Power	电压 Voltage	防护等级 Protection grade	b3	h4	h6	h7	L3	L4/L5	L6	t	p	q	电机重量 Motor weight	底座重量 Base weight	地脚螺栓 Anchor
100-310	Y160M-4	11	380V	IP44	400	325	495	720	1060	430	-	300	70	605	130	110	6-M16
	Y160L-4	15	380V	IP44	400	325	495	720	1100	450	-	300	70	650	145	110	6-M16
	Y180M-4	18.5	380V	IP44	400	325	495	745	1100	450	-	300	70	670	180	120	6-M16
	Y180L-4	22	380V	IP44	400	325	495	745	1140	470	-	300	70	710	200	120	6-M16
	Y280S-2	75	380V	IP44	510	345	515	875	1390	595	-	300	70	1000	544	160	6-M16
	Y280M-2	90	380V	IP44	510	345	515	875	1440	620	-	300	70	1050	620	160	6-M16
	Y315S-2	110	380V	IP44	580	365	535	1085	1480	640	-	400	70	1240	980	250	6-M20
	Y315M-2	132	380V	IP44	580	365	535	1085	1530	665	-	400	70	1310	1080	250	6-M20
	Y315L-2	160 200	380V	IP44	580	365	535	1085	1560	680	-	400	70	1310	1220	250	6-M20

S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
125-230(I)G	426	118.4	68	2900	93.8	84.2	9.9	132	245
	541	150.3	60		101.8	85.5			
	639	177.6	48		101.9	82			
	392	108.8	60		78.1	82	10.1	110	228
	490	136.1	52		82.1	84			
	585	163.2	43.5		84.4	82.5			
	363	100.8	50		63.4	78	10.3	75	210
	454	126	43.5		65.1	82			
	544	151.2	35		66.6	78			
	340	94.4	40		49.4	75	10.7	55	193
	425	118	34		50.8	77			
	489	135.7	30		52.5	78			
125-230G	377	104.8	68	2900	84.2	83	12.1	110	245
	472	181	60.5		92	84.5			
	566	157.2	55		101.5	83.6			
	349	96.9	60		70.3	81	11.8	90	228
	436	121	53		74.8	84			
	523	145.2	44		77.2	81.2			
	328	91.2	52		60.1	77.5	11.9	75	210
	410	114	45		61.3	82			
	493	136.7	37		63.3	78.4			
	305	84.8	42.5		47.1	75	12.0	75	193
	382	106	37		49.9	77			
	458	127.2	30		49.9	75			
125-230(I)	220	61.1	17	1450	12.1	84	2.3	18.5	245
	274	76.1	14.8		12.9	85.5			
	328	91.1	12		13.1	82			
	193	53.6	15		9.7	81	2.3	15	228
	241	66.9	13.2		10.3	84.5			
	290	80.5	10.8		10.4	82			
	184	51.1	12.6		8.0	79.4	2.2	11	210
	230	63.9	10.6		8.1	82.5			
	277	76.9	8.0		8.1	76			
	167	46.4	10.3		6.4	73	2.2	7.5	193
	209	58.1	8.7		6.4	77.5			
	250	69.4	6.8		6.3	73			
	190	52.8	17		10.5	84.1	2.7	15	245
	238	66.1	15.1		11.6	84.5			

125-230	307	85.3	11.5	1450	12.0	80	2.7	11	228
	170	47.2	15		8.6	81			
	212	58.9	13.5		9.3	84			
	255	70.8	11.4		9.7	82	2.7	11	210
	164	45.6	13.0		7.5	78			
	205	56.9	11.5		7.8	82			
	246	68.4	9.2		7.9	78	2.7	7.5	193
	156	43.2	10.5		5.9	75			
	195	54.2	9.1		6.2	78			
	223	61.9	7.7		6.3	74			

安装外形尺寸图 INSTALLATION DIMENSION

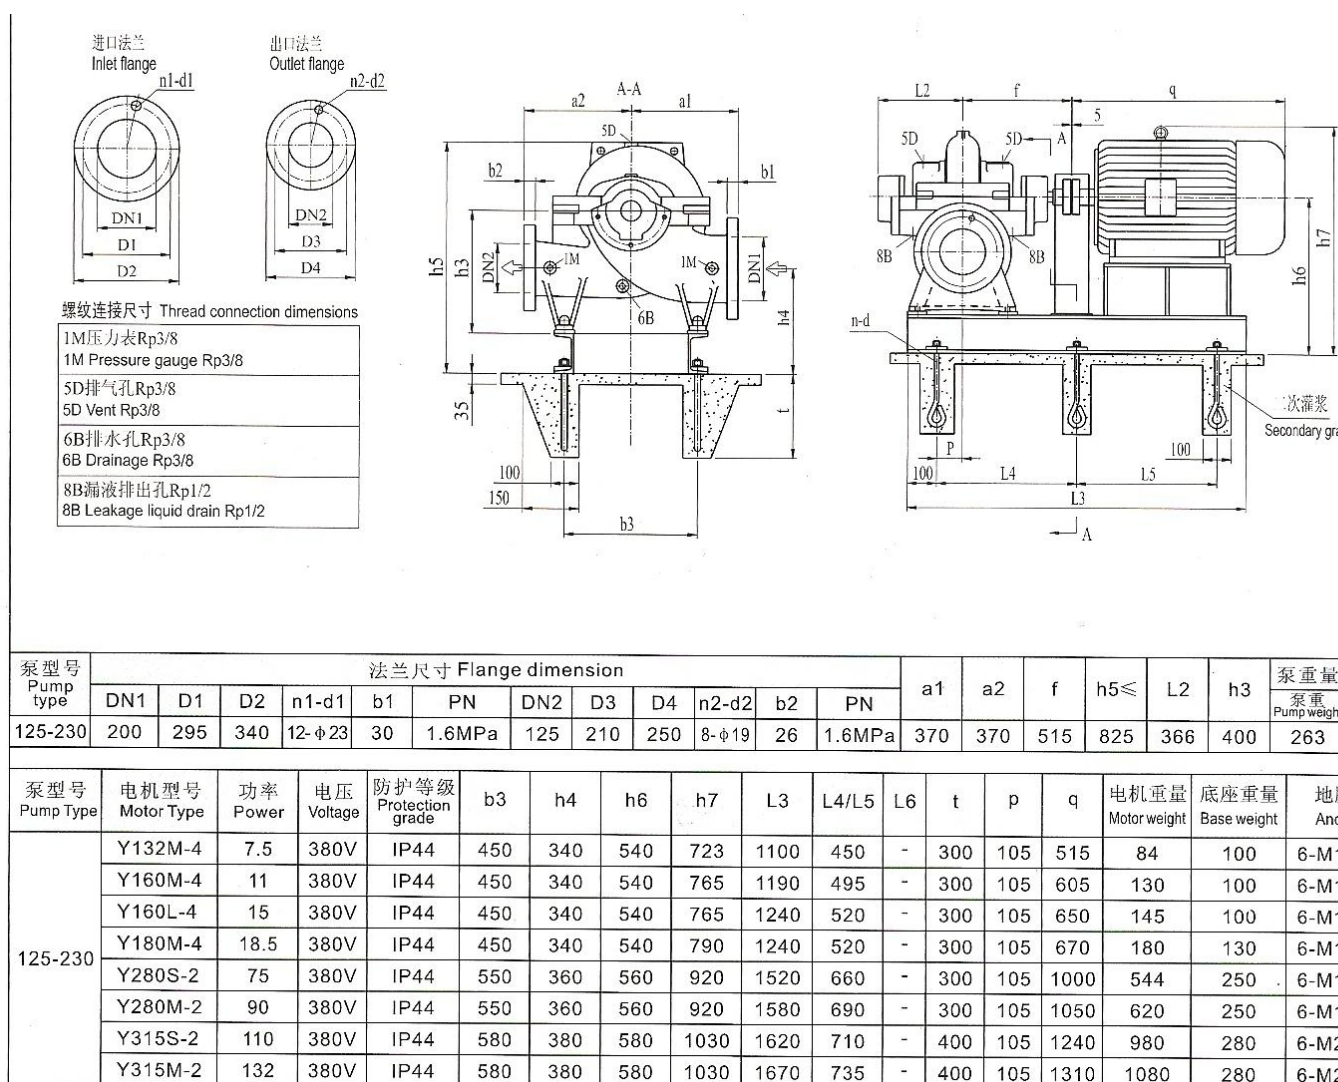


S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
125-290(I)G	428	118.8	117	2900	166	82	10.9	200	301
	535	148.5	108		187	84			
	640	178.3	94		197	83			
	397	110.3	97		131	80	10.7	160	276
	497	138	88		145	82			
	596	165.6	75		153	79.5			
	363	100.8	80		101	78.3	10.5	132	254
	454	126	72		111	80			
	544	151.2	62		117	78.8			
	323	89.6	65		74.7	76.5	10.4	90	232
	403	112	57		80.2	78			
	484	134.4	47		80.5	77			
125-290G	383	106.4	113	2900	145	81.6	10.9	185	301
	480	133.3	100		157	83			
	575	159.6	85.5		166	80.5			
	348	96.7	93.5		112	79.5	10.5	160	276
	436	121	83.5		121	82			
	523	145.2	70		126	79			
	308	85.6	78		84.5	77.5	10.1	110	254
	385	107	70		93	79			
	462	128.3	60		96.9	78			
	274	76	60		59.6	75	10.0	90	232
	342	95	55		67.4	76			
	410	114	47		70	75			
125-290(I)	215	59.7	29.2	1450	20.8	82.3	2.4	30	301
	269	74.7	27		23.6	84			
	323	89.7	23.5		25.2	82			
	195	54.2	24.4		16.1	80.3	2.4	22	276
	243	67.5	22		17.8	82			
	292	81.1	19.6		19.5	80			
	178	49.4	20		12.3	79	2.3	15/18.5	254
	223	61.9	18		13.7	80			
	268	74.4	15.5		14.4	78.3			
	161	44.7	16.3		9.3	77	2.3	15	232
	202	56.1	14.2		10	78			
	242	67.2	11.8		10.2	76.2			
	193	53.6	27.5		17.8	81	2.4	30	301
	241	66.9	25		19.8	83			

125-290	290	80.6	21.3	1450	20.6	80	2.3	18.5	276
	174	48.3	23.4		13.9	80			
	218	60.6	21		15.2	82			
	261	72.5	17.5		16	78	2.2	15	254
	157	43.6	19		10.4	78			
	196	54.4	17.5		11.8	79			
	235	65.3	15		12.3	78	2.2	11	232
	138	38.3	15.1		7.7	74.3			
	173	48.1	13.7		8.5	76			
	207	57.5	11.3		8.6	74			

安装外形尺寸图 INSTALLATION DIMENSION

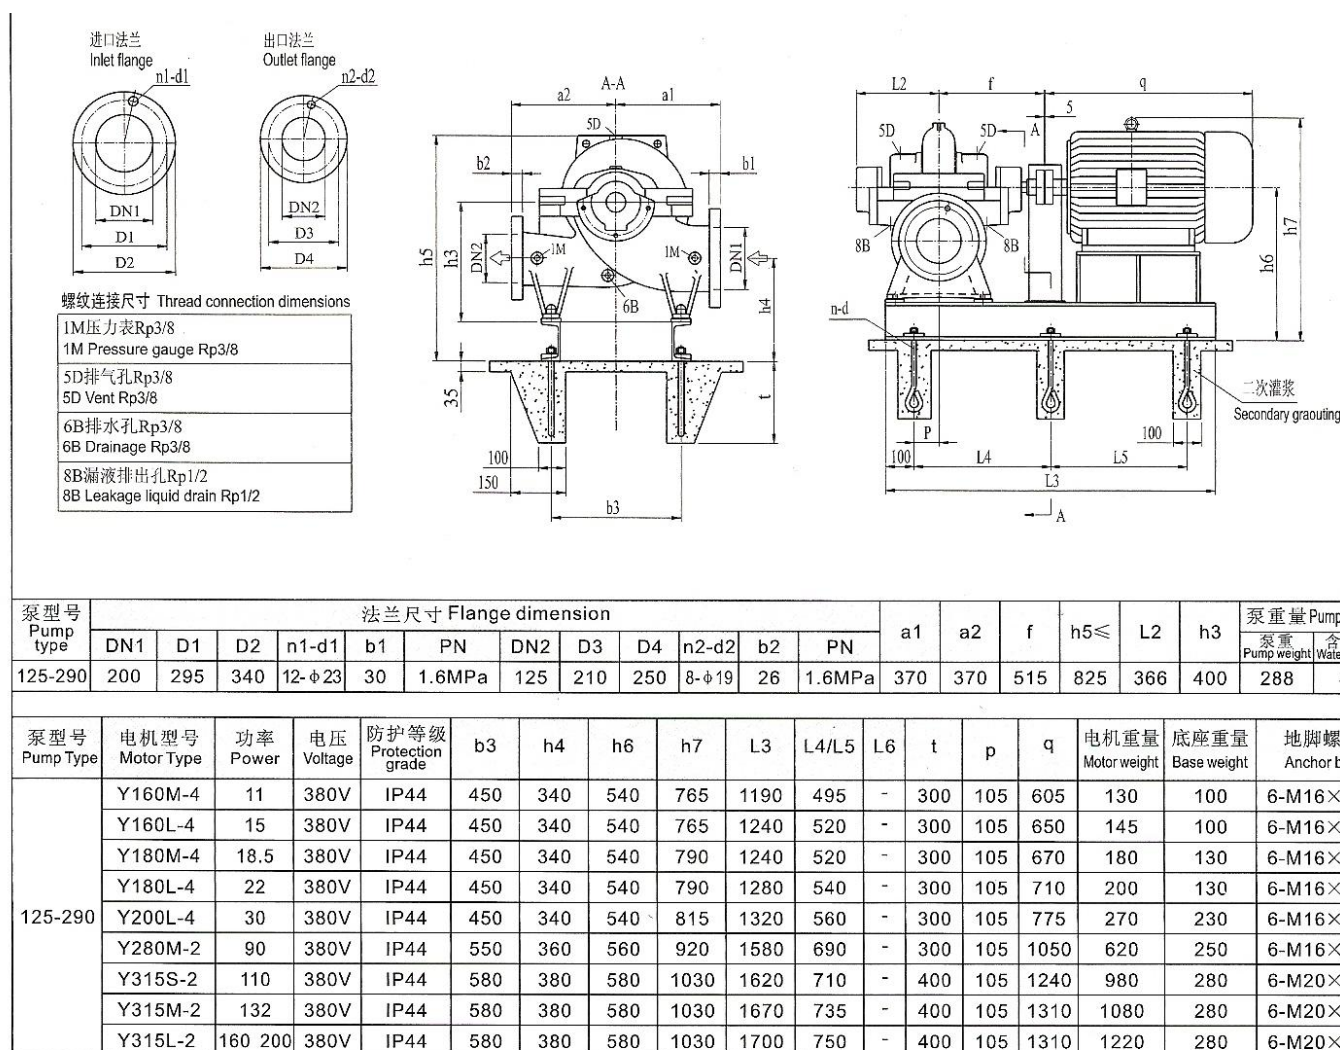


S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
80-370(I)	90	25	41	1450	13.8	73	2.8	22	345
	113	31.4	38.8		16.2	75			
	136	37.8	33.5		17.3	71.8			
	80	22.2	35.0		10.6	71	2.3	15	320
	99	27.5	33		12.1	72.2			
	120	33.3	29.1		13.3	71			
	70	19.4	29.3		8.2	38.4	2.3	11	300
	88	24.4	27.5		9.4	70			
	106	29.4	24.7		10.2	68.3			
	65	18.1	23.8		6.4	66	2.3	11	270
	81	22.5	22.5		7.4	67.5			
	98	27.2	20		8.0	65.5			
80-370	80	22.2	38.8	1450	11.8	71	3.0	18.5	345
	99	27.5	35.5		13.1	73			
	120	33.3	31.1		14.3	71			
	72	20	34.1		9.7	69	2.6	15	320
	90	25	30.8		10.8	70			
	108	30	26.3		11.4	68			
	60	16.7	27.5		7.0	64.5	2.3	11	295
	76	21.1	25.5		8.0	66			
	90	25	22.5		8.5	65.2			
	53	14.7	21.3		4.9	63	2.3	7.5	270
	67	18.6	20		5.7	64			
	80	22.2	17.5		6.0	63			
100-375(I)	148	41.1	57	1450	31.4	73	3.0	45	408
	185	51.4	51		33.5	76.5			
	220	61.1	44		35.6	74			
	133	36.9	47.3		24.5	71	2.7	37	378
	167	46.4	46		28.3	74			
	200	55.6	38		29.2	72.3			
	124	34.4	41		20.3	67.5	2.5	30	355
	155	43.1	38		22.6	71			
	186	51.7	31		23.1	68			
	108	30	32.5		14.4	66.3	2.1	18.5	325
	135	37.5	30.3		14.5	69			
	162	45	25.3		16.8	66.5			
	130	36.1	56.2		28.4	70	3.6	37	408
	162	45	52		31.4	72			

100-375	195	54.2	45.8	1450	35.9	67.5	3.3	30	378
	114	31.7	47.5		22.2	66.5			
	142	39.4	44		23.7	69			
	170	47.2	39		27.3	66.5	3.0	30	355
	105	29.2	40		17.7	64.5			
	130	36.1	37.5		18.8	66.5			
	157	43.6	32.5		21.7	64	2.7	18.5	325
	92	25.6	30.8		12.7	61			
	115	31.9	28.7		14.3	63			
	138	38.3	25		15.4	61.2			

安装外形尺寸图 INSTALLATION DIMENSION

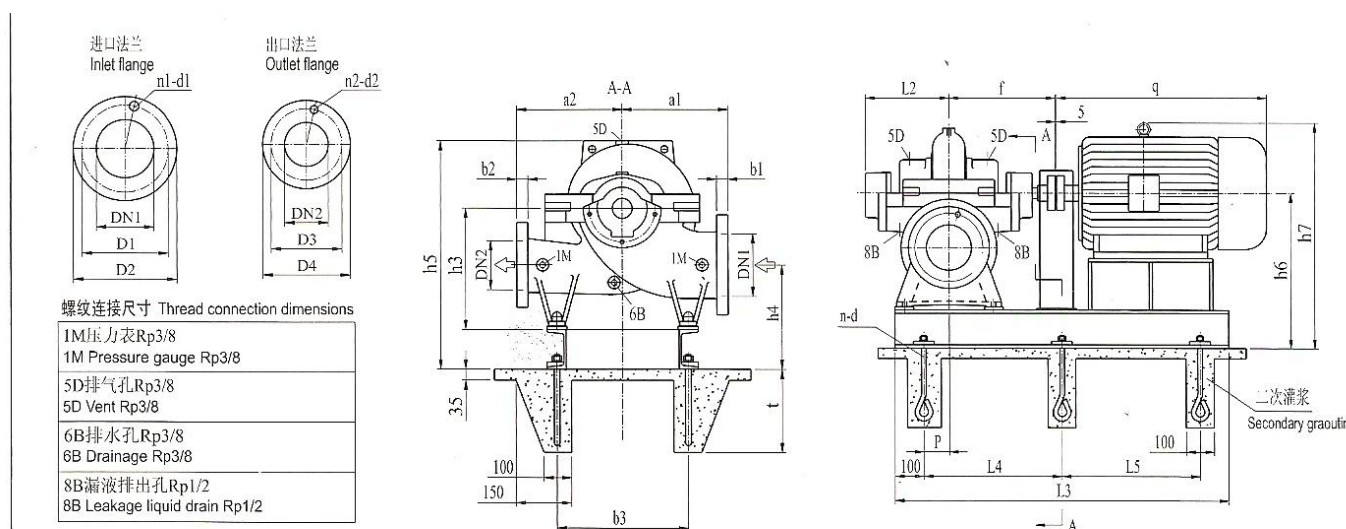

泵型号 Pump type	法兰尺寸 Flange dimension												a1	a2	f	h5≤	L2	h3	泵重量 Pump weight	
	DN1	D1	D2	n1-d1	b1	PN	DN2	D3	D4	n2-d2	b2	PN							重量 Weight	重量 Weight
80-370	125	210	250	8-φ19	26	1.6MPa	80	160	200	8-φ19	22	1.6MPa	330	330	415	660	300	315	215	215
100-375	150	240	285	8-φ23	26	1.6MPa	100	180	220	8-φ19	24	1.6MPa	370	370	415	760	300	355	258	258


泵型号 Pump Type	电机型号 Motor Type	功率 Power	电压 Voltage	防护等级 Protection grade	b3	h4	h6	h7	L3	L4/L5	L6	t	p	q	电机重量 Motor weight	底座重量 Base weight	地脚螺栓 Anchor
80-370	Y132M-4	7.5	380V	IP44	340	315	455	638	970	385	-	300	70	515	84	80	6-M16
	Y160M-4	11	380V	IP44	340	315	455	680	1050	425	-	300	70	605	130	80	6-M16
	Y160L-4	15	380V	IP44	340	315	455	680	1100	450	-	300	70	650	145	80	6-M16
	Y180M-4	18.5	380V	IP44	340	315	455	705	1110	455	-	300	70	670	180	110	6-M16
	Y180L-4	22	380V	IP44	340	315	455	705	1150	475	-	300	70	710	200	110	6-M16
100-375	Y180M-4	18.5	380V	IP44	400	325	495	745	1100	450	-	300	70	670	180	120	6-M16
	Y180L-4	22	380V	IP44	400	325	495	745	1140	470	-	300	70	710	200	120	6-M16
	Y200L-4	30	380V	IP44	400	325	495	770	1190	485	-	300	70	775	270	200	6-M16
	Y225S-4	37	380V	IP44	400	325	495	800	1220	510	-	300	70	820	284	200	6-M16
	Y225M-4	45	380V	IP44	400	325	495	800	1240	520	-	300	70	845	320	200	6-M16

S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
125-365(I)	245	68.8	50	1450	41.2	82	2.6	75	385
	310	86	47		47.2	84			
	360	100	44		52.3	82			
	225	62.4	41.6		31.8	80	2.8	45	353
	281	78	39		36	83			
	337	93.6	35.6		40.4	81.2			
	205	56.8	33.7		24.2	76	2.9	37	321
	256	71	31.5		26.8	82			
	307	85.2	28.2		29.8	79.5			
	184	51.2	25.5		16.9	76	3.0	30	289
	230	64	24		18.8	80			
	278	76.8	20.9		20.2	78			
125-365	222	61.6	46.3	1450	35.4	79.2	2.9	55	385
	277	77	43		40.1	81			
	333	92.4	38.8		44	80			
	202	56	39.8		28	78.5	2.8	37	353
	252	70	37		31.8	80			
	302	84	32.8		34.2	79			
	182	50.4	32.6		21.4	76.5	2.8	30	321
	227	63	30.5		24.5	78.5			
	272	75.6	27.5		26.8	76			
	158	44	26.3		14.9	77.8	2.7	22	289
	198	55	24.5		17.4	78			
	238	66	21.8		18.8	75.2			
125-500(I)	262	72.8	82	1450	73.7	79.5	2.8	110	475
	328	91	76		82.7	82			
	393	109.2	70		96.4	77.8			
	233	64.8	70		56.7	78.5	2.7	90	443
	292	81	66.5		67.3	80			
	342	95	62		74.8	77.2			
	205	56.8	60		44.0	76	2.5	75	412
	256	71	56		50.6	77			
	307	85.2	51.5		56.6	76			
	184	51.2	50		34.2	73.5	2.5	45	381
	230	64	47		38.8	76.5			
	252	70	45		40.7	76			
	235	65.2	75		61.7	77.7	3.2	90	475
	293	81.5	69.5		70.3	79			

125-500	352	97.8	63	1450	78.5	77	2.9	75	443
	217	60.4	65		50.1	76.8			
	272	75.5	60.5		57.4	78			
	326	90.6	55		64.3	76	2.6	37	381
	181	50.4	57		37.5	75.1			
	227	63	53		42.5	77			
	272	75.6	48.3		47.3	75.8	2.5	37	381
	161	44.8	47.5		28.2	74			
	202	56	45		32.5	76			
	234	65	40		34.5	74			

安装外形尺寸图 INSTALLATION DIMENSION

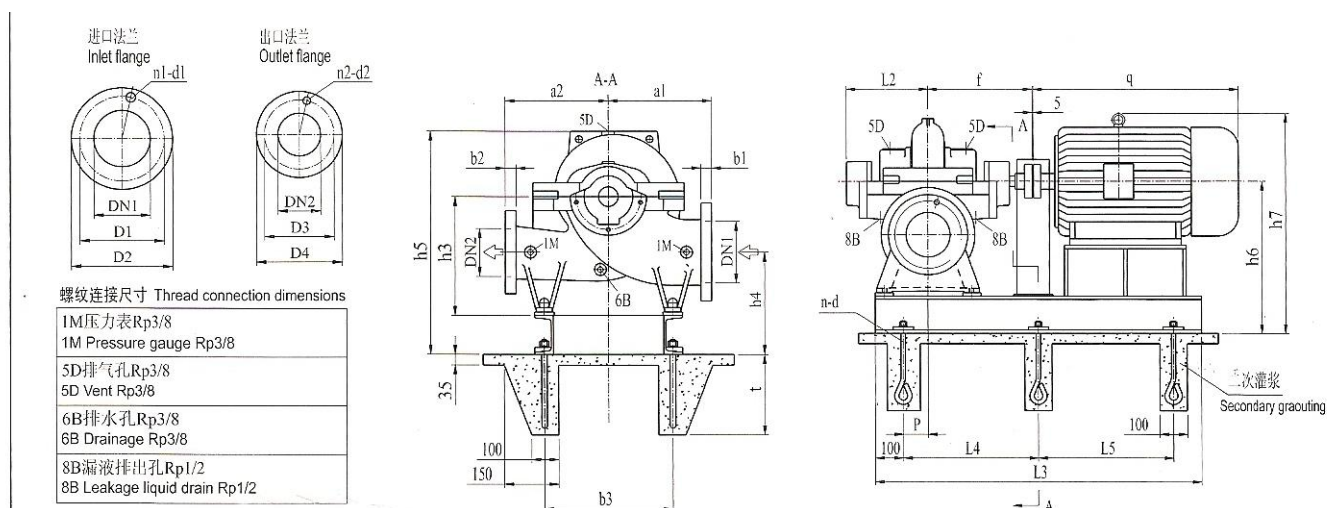

泵型号 Pump type	法兰尺寸 Flange dimension												a1	a2	f	h5≤	L2	h3	泵重量 Pump weight	
	DN1	D1	D2	n1-d1	b1	PN	DN2	D3	D4	n2-d2	b2	PN							泵重 Pump weight	含水 Water
125-365	200	295	340	12-φ23	30	1.6MPa	125	210	250	8-φ19	26	1.6MPa	370	370	515	825	366	400	315	4
125-500	200	295	340	12-φ23	30	1.6MPa	125	210	250	8-φ19	26	1.6MPa	450	450	515	825	366	400	352	5


泵型号 Pump Type	电机型号 Motor Type	功率 Power	电压 Voltage	防护等级 Protection grade	b3	h4	h6	h7	L3	L4/L5	L6	t	p	q	电机重量 Motor weight	底座重量 Base weight	地脚螺栓 Anchor bol
125-365	Y180L-4	22	380V	IP44	450	340	540	790	1280	540	-	300	105	710	200	130	6-M16×3
	Y200L-4	30	380V	IP44	450	340	540	815	1320	560	-	300	105	775	270	230	6-M16×3
	Y225S-4	37	380V	IP44	450	340	540	845	1350	575	-	300	105	820	284	230	6-M16×3
	Y225M-4	45	380V	IP44	450	340	540	845	1380	590	-	300	105	845	320	230	6-M16×3
	Y250M-4	55	380V	IP44	450	340	560	865	1440	620	-	300	105	930	427	250	6-M16×3
125-500	Y280S-4	75	380V	IP44	550	360	560	920	1520	660	-	300	105	1000	562	250	6-M16×3
	Y225S-4	37	380V	IP44	560	360	560	865	1350	575	-	300	105	820	284	250	6-M16×3
	Y225M-4	45	380V	IP44	560	360	560	865	1380	590	-	300	105	845	320	250	6-M16×3
	Y250M-4	55	380V	IP44	560	360	560	885	1440	620	-	300	105	930	427	310	6-M16×3
	Y280S-4	75	380V	IP44	560	360	560	920	1510	655	-	300	105	1000	562	310	6-M16×3
	Y280M-4	90	380V	IP44	560	360	560	920	1560	680	-	300	105	1050	667	490	6-M16×3
	Y315S-4	110	380V	IP44	560	360	560	1110	1630	715	-	300	105	1270	1000	490	6-M16×3

S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
150-290(I)	354	98.3	24	1450	27.1	85.6	2.9	37	289
	443	123	21		29.1	87			
	531	147.5	17.5		30.3	83.5			
	323	89.7	21		22.2	83	2.9	30	269
	403	112	18		23	86			
	484	134.4	15		24	82.3			
	302	83.9	17.5		18	80	2.9	22	248
	378	105	15		18.4	84			
	454	126	12.3		19.1	79.4			
	280	77.8	13.7		13.9	75	3.0	18.5	227
	350	97.2	11.5		14.2	77			
	396	110	10		14.2	76			
150-290	317	88	23.4	1450	24	84.2	3.0	30	289
	396	110	20.4		25.6	86			
	475	132	16.6		25.7	83.5			
	302	84	20		19.9	82.8	3.1	30	269
	378	105	17		20.6	85			
	454	126	13.7		20.7	82			
	282	78.3	17.5		16.6	80.6	3.1	22	248
	353	98	14.5		16.6	84			
	423	117.5	11.3		16.5	79			
	265	73.6	14		13.0	76.7	3.1	18.5	227
	331	92	11.5		13.0	80			
	378	105	9.8		13.3	76			
150-360(I)	357	99.2	41.3	1450	48.4	83	3.0	75	355
	446	124	38		54.3	85			
	536	148.9	34.2		60.4	82.7			
	323	89.7	34.2		36.9	81.5	3.0	55	325
	403	112	31		41	83			
	484	134.4	26.3		42.9	80.8			
	298	82.8	28.7		29.4	79	3.0	37	299
	370	102.8	25		31.2	81			
	445	123.6	21		32.3	78.8			
	265	73.6	23.4		22.1	76.5	3.1	30	274
	331	92	20		23.1	78			
	389	110.6	16.7		23.3	77.6			
	325	90.3	39.2		42.3	82.1	3.0	55	355
	407	113	35		46.2	84			

150-360	488	135.6	30	1450	49.3	81	3.0	45	325
	294	81.7	33		32.8	80.5			
	367	102	29.5		36	82			
	440	122.2	25		37.5	80	3.0	37	299
	267	74.2	27.5		25.4	78.8			
	334	92.8	25		28.5	80			
	400	111.1	21.3		29.8	78	3.0	30	274
	233	64.7	22.8		19.2	75.7			
	292	81.1	20.5		20.9	78			
	350	97.2	17.5		22	76			

安装外形尺寸图 INSTALLATION DIMENSION

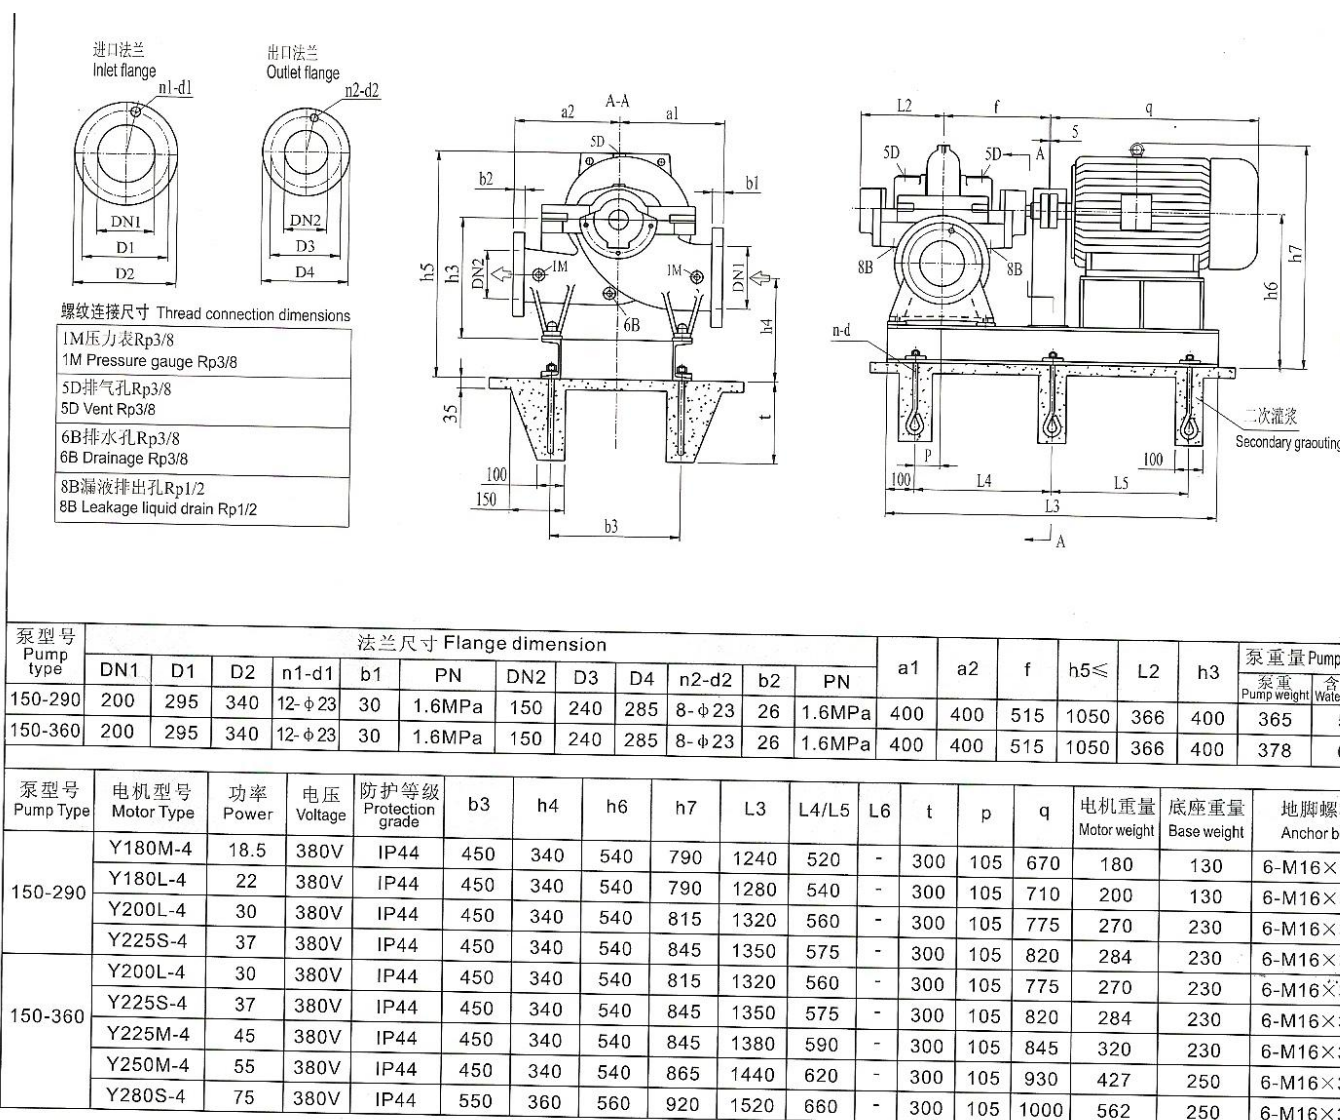


S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
150-460(I)	412	114.4	71	1450	99.4	80.2	3.9	132	454
	515	143.1	66		112.8	82			
	618	171.6	60		126.2	80			
	377	104.7	58		75.2	79.3	3.8	110	416
	472	131.1	54.5		86.4	81			
	566	157.2	48		94.9	78			
	346	96	47.5		57	78.5	3.7	75	378
	432	120	43.5		64	80			
	516	143.3	37		69.7	75			
	317	88	38		42.6	77	3.3	55	340
	396	110	35		48.1	78.5			
	475	132	28.2		50.7	72			
150-460	350	97.2	65	1450	78.3	79.5	3.9	110	454
	440	122.2	60		88.6	81			
	527	146.4	53.5		97.6	78.7			
	323	89.7	54		60.3	78.7	3.7	90	416
	403	112	50		68.2	80.5			
	484	134.4	44.5		75.2	78			
	300	83.3	44.4		46.5	78	3.4	75	378
	375	104	40		51	80			
	450	125	34.5		57.1	74			
	260	72.2	35.5		33.5	74.8	3.2	45	340
	324	90	33		37.3	78			
	390	108	28.4		40.7	74			
150-605(I)	467	129.7	112	1450	182.6	78	4.2	250	560
	583	161.9	105		206	81			
	700	194.4	95.5		233.4	78			
	440	122.2	96		151.1	76.3	4.0	200	523
	550	152.7	88.5		168	79			
	684	180	81		187.5	76.3			
	412	114.4	82		120	76.6	3.8	160	486
	515	143	75		134.8	78			
	605	168	68		151.4	74			
	378	105	67.5		92.3	75.2	3.5	132	449
	472	131.1	61.5		102.6	77			
	526	146.1	55.2		106.8	74			
	430	119.4	98		149.2	76.8	4.7	200	560
	536	148.9	90		166.4	79			

150-605	617	171.4	82	1450	181.5	76	4.2	160	523
	392	108.9	85		118.9	76.3			
	490	136.1	78		133.3	78			
	576	160	70		148.1	74.2	4.0	132	486
	357	99.2	75		96.2	75.9			
	446	124	68.5		108.2	77			
	535	148.8	60		118.4	74	3.6	110	449
	323	89.7	62.5		73.4	74.9			
	403	112	57.5		83.1	76			
	484	134.4	50		91.6	72			

安装外形尺寸图
 INSTALLATION DIMENSION

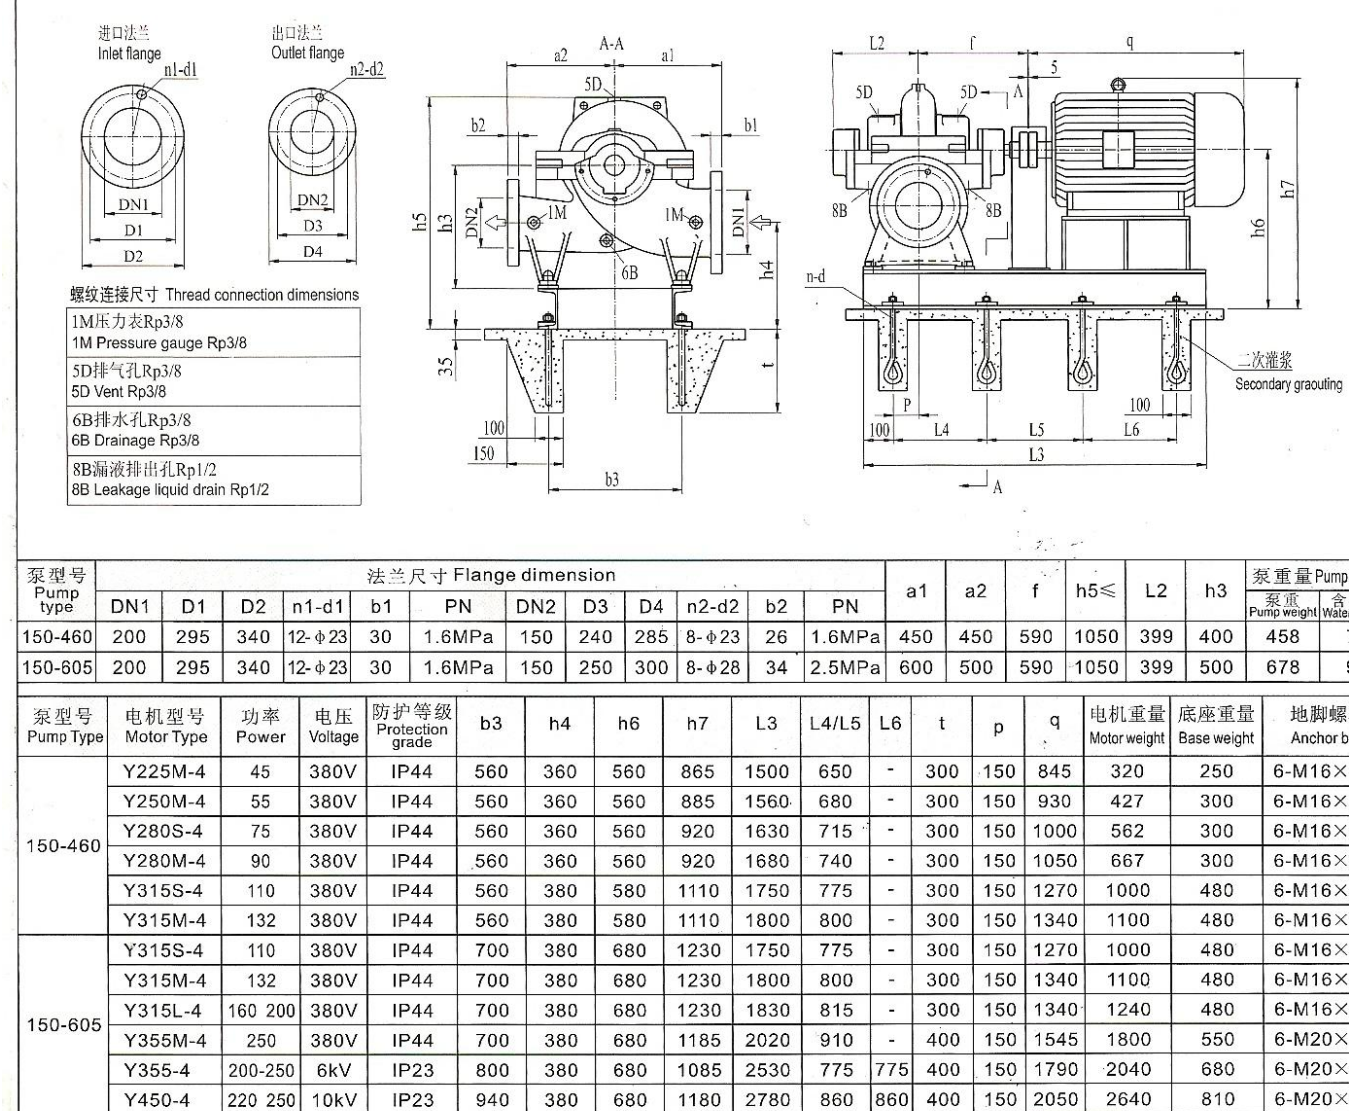


S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
200-320(I)	556	154.4	34	1450	60	86	3.8	75	338
	695	193	30		64.9	87.5			
	834	231.7	25		67.2	84.5			
	518	144	29		48.8	84	4.0	75	314
	648	180	25.5		52	86.5			
	778	216	21.3		54	83.5			
	481	133.4	25		40.7	80.5	4.1	55	290
	601	167	21.3		41	85			
	720	200	17.2		42.3	80			
	440	122.2	18.9		29	78	4.1	37	266
	550	152.8	17		32.3	79			
	612	170	15.3		32.9	77.5			
200-320	510	141.7	32.3	1450	52.7	85.2	3.0	75	338
	637	176.9	28		56.2	86.5			
	765	212.5	23.4		58.0	84			
	475	132	28.5		44	83.8	3.2	55	314
	594	165	24.5		46.1	86			
	713	198	20		46.9	82.9			
	445	123.6	23.8		35.6	81.3	3.4	45	290
	558	155	21		38.0	84			
	670	186	17.2		38.4	81.8			
	412	114.4	20		28.8	78	3.8	37	266
	515	143.1	17		29.1	82			
	595	165.3	14.2		29.5	78			
200-420(I)	567	157.5	57	1450	104	84.5	3.9	132	415
	709	179	52		116	86.5			
	850	236.1	47		129	84.5			
	504	140	47.5		79.1	82.5	3.9	110	380
	630	175	42.5		86.3	84.5			
	756	210	37.5		93.1	83			
	458	127.2	40		62	80.5	3.9	75	350
	575	159	35.5		66.7	83			
	687	190.8	30		68.8	81.6			
	409	113.6	32.5		45.8	79	4.0	75	320
	511	142	27.5		49	81			
	613	170	24		50.1	80			
	518	144	54		90.8	84	3.5	110	415
	648	180	48.5		99.1	85.5			

200-420	778	216	42	1450	107	83.5	3.5	90	380
	467	130	45		69.8	82			
	583	162	40.5		76.6	84			
	700	195	35		81.9	81.5			
	423	118	38		54.8	80	3.7	75	350
	530	147	34.5		60.6	82			
	635	176	29		63.1	79.5			
	375	104	31.5		41.5	77.5			
	468	130	28		45.8	78	3.8	55	320
	562	156	24		47.5	77.3			

安装外形尺寸图 INSTALLATION DIMENSION

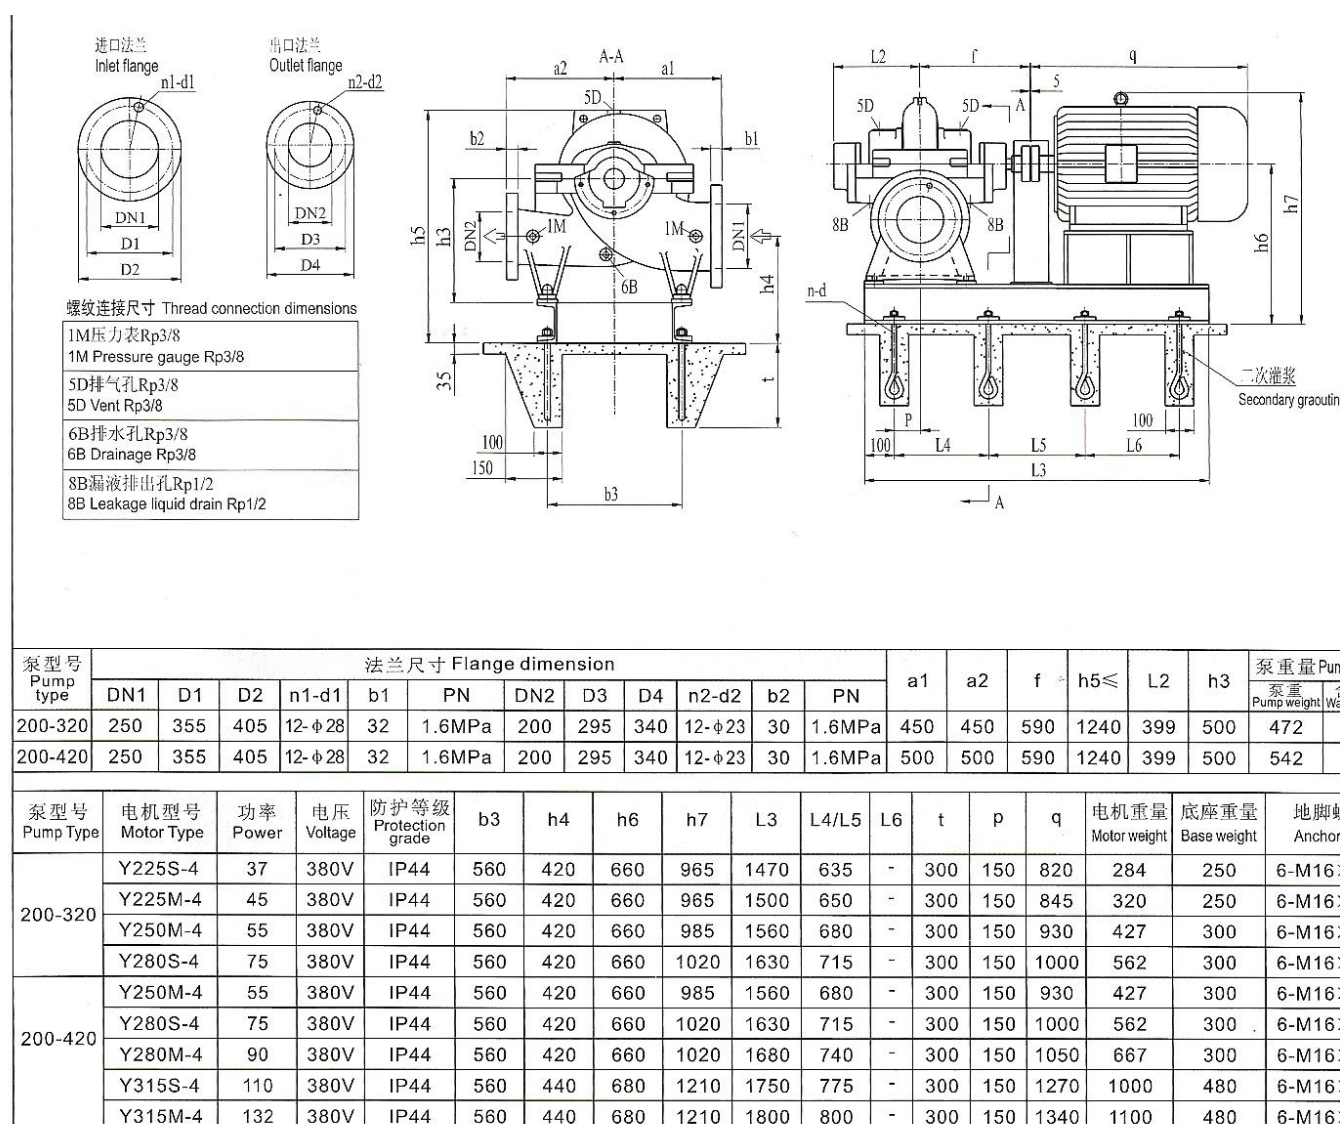


S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
200-520(I)	654	181.7	97	1450	210	82.2	4.0	280/315	530
	817	227	91		241	84			
	980	272.2	83		272	81.5			
	605	168	82.5		170	80.2	4.5	250	486
	756	210	76.5		192	83			
	907	252	70		215	80.4			
	565	156.9	67		132	78.1	3.7	200	442
	706	196.1	62.5		148	81			
	847	235.2	55		163	78.0			
	518	144	52.3		98	75.5	3.5	132	398
	648	180	47.5		107	78.5			
	778	216.1	42		117	76.2			
200-520	588	163.2	88	1450	175	80.3	3.5	250	530
	734	204	81.7		197	83			
	880	244.8	73.2		219	80.3			
	556	154.4	74		141	79.6	3.8	185	486
	695	193	68		159	81			
	834	231.7	60		172	79.3			
	524	145.6	60		109	78.5	3.6	160	442
	655	182	55		123	80			
	786	218.3	48.8		134	78			
	478	132.8	48		81	76.8	2.9	110	398
	598	166	43.5		91	78			
	717	199.2	38		98	76			
200-670(I)	634	176	157.5	1450	350	77.7	3.6	500	655
	792	220	150		404	80			
	936	260	140		457	78.2			
	596	165.6	134.5		285	76.7	3.4	400	611
	745	206.9	127		328	78.5			
	894	248.3	114.5		367	76			
	562	156.1	114.5		231	76	3.2	315	568
	702	195	107		266	77			
	842	234	95.5		293	74.8			
	527	146.4	95.5		183	74.8	3.0	250	525
	659	183	88		208	76			
	770	213.9	80		227	74			
	576	160	142		289	77.2	3.4	400	655
	720	200	132.5		329	79			

200-670	864	240	120	1450	372	76	3.3	315	611
	530	147.2	123		231	76.8			
	662	183.9	114.5		263	78.5			
	795	220.8	104		296	76	3.2	250	568
	493	136.9	106		187	76.1			
	616	171.1	98.5		212	78			
	720	200	90		232	76	2.9	200	525
	455	126.4	90		149	74.8			
	569	158.1	83		167	77			
	683	189.7	73		184	74			

安装外形尺寸图
 INSTALLATION DIMENSION

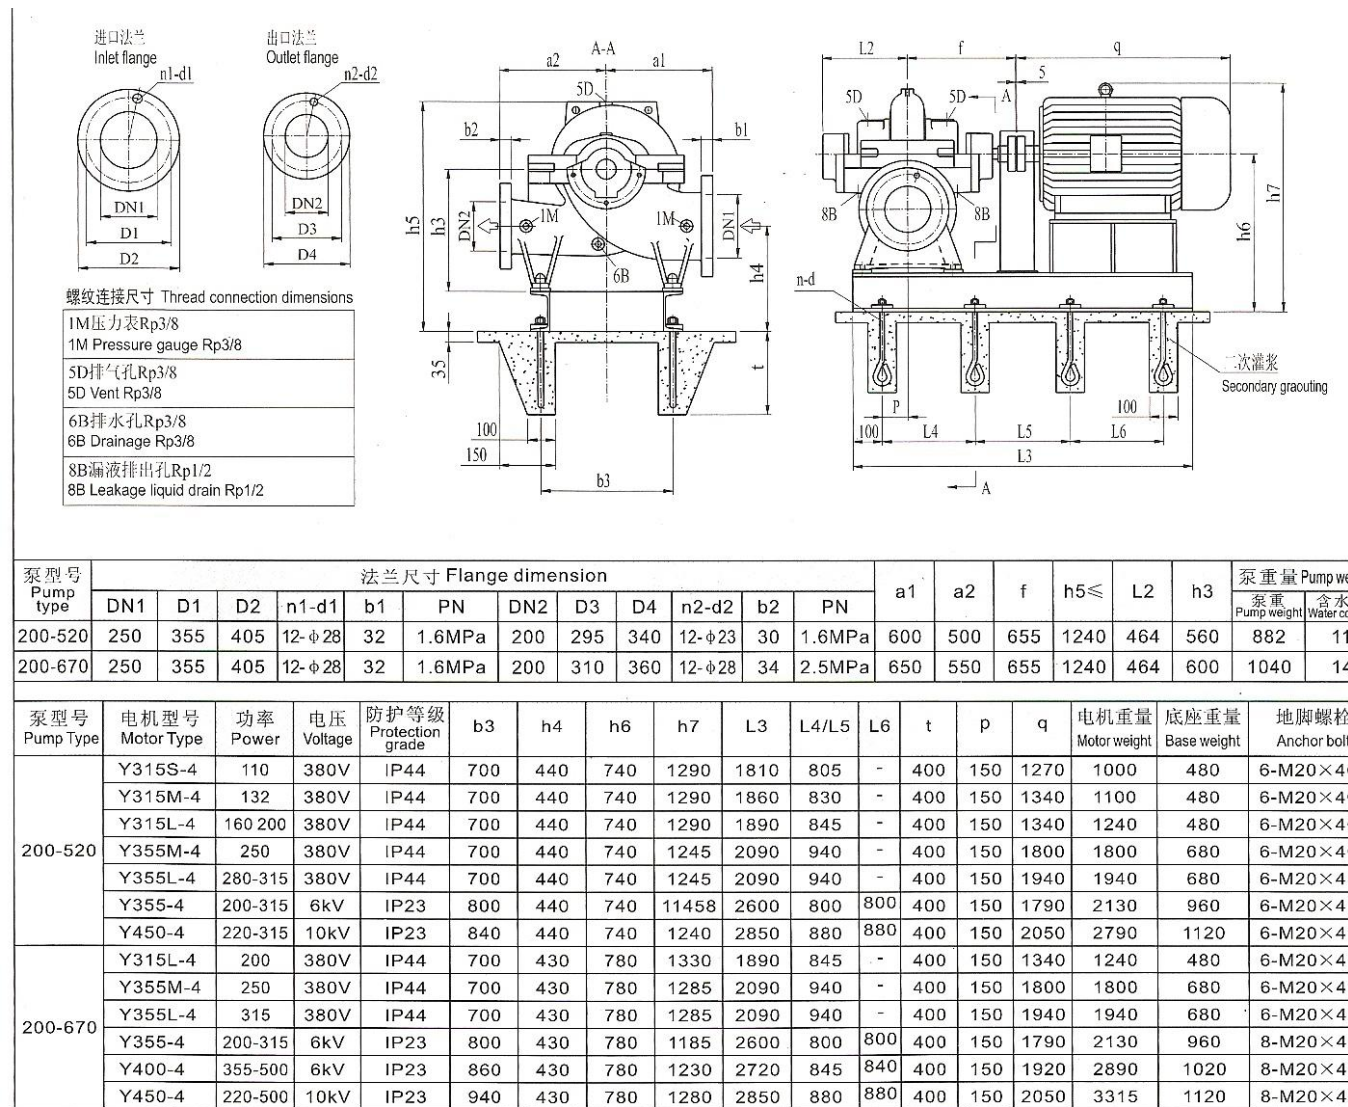


S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
250-370(I)	840	233.3	44	1450	118	85.3	4.7	160	389
	1051	292	39		127	88			
	1260	350	33.5		137	84			
	795	220.8	37.5		99	82.3	5.0	132	362
	994	276.1	33		104	86			
	1192	331.2	27.7		109	82.3			
	755	209.7	31.5		83	78	5.0	110	334
	943	261.9	27		83.6	83			
	1131	314.4	21		83.6	77.5			
	756	210	23		62.3	76	5.0	75	306
	871	242	20		61.2	77.5			
	1008	280	16		57.8	76			
250-370	823	228.6	42.3	1450	112	84.5	4.7	132	389
	1029	286	37		119	87			
	1235	343	31		124	84.3			
	775	215.3	37		94.9	82.3	4.7	110	362
	968	268.9	32		98.1	86			
	1162	322.8	27		103.6	82.5			
	732	203.3	32		79.7	80	4.7	90	334
	914	253.9	27		80	84			
	1097	304.8	22		82.2	80			
	680	188.9	25.6		61.6	77	4.7	75	306
	850	236.1	22		62.1	82			
	1020	283.3	17		61.3	77			
250-480(I)	938	260.7	73.5	1450	222	84.8	4.1	280	478
	1173	326	66		239	88			
	1408	391	58		262	85			
	864	240	60.5		166	82.8	4.0	220	438
	1080	300	55		188	86			
	1296	360	47.5		202	83			
	800	222.4	50		136	80	4.0	185	403
	1000	278	45.5		149	83			
	1200	333.6	38		160	77.6			
	527	146.4	95.5		183	74.8	3.0	250	525
	659	183	88		208	76			
	770	213.9	80		227	74			
	864	240	62		177	82.5	4.1	220	478
	1044	290	55.5		191	84			

250-480	1296	360	45	1450	199	80	4.1	185	438
	780	216.7	53.5		141	81			
	976	271	47		149	84			
	1171	325.2	42		163	82	3.6	160	403
	708	196.7	45		111	78.6			
	886	246.1	40.5		121	80.5			
	1063	295.2	34		126	78	3.6	110	369
	642	178.3	40		94.6	74			
	803	223	34.5		96.1	78.5			
	963	267.5	28.5		98.4	76			

安装外形尺寸图 INSTALLATION DIMENSION

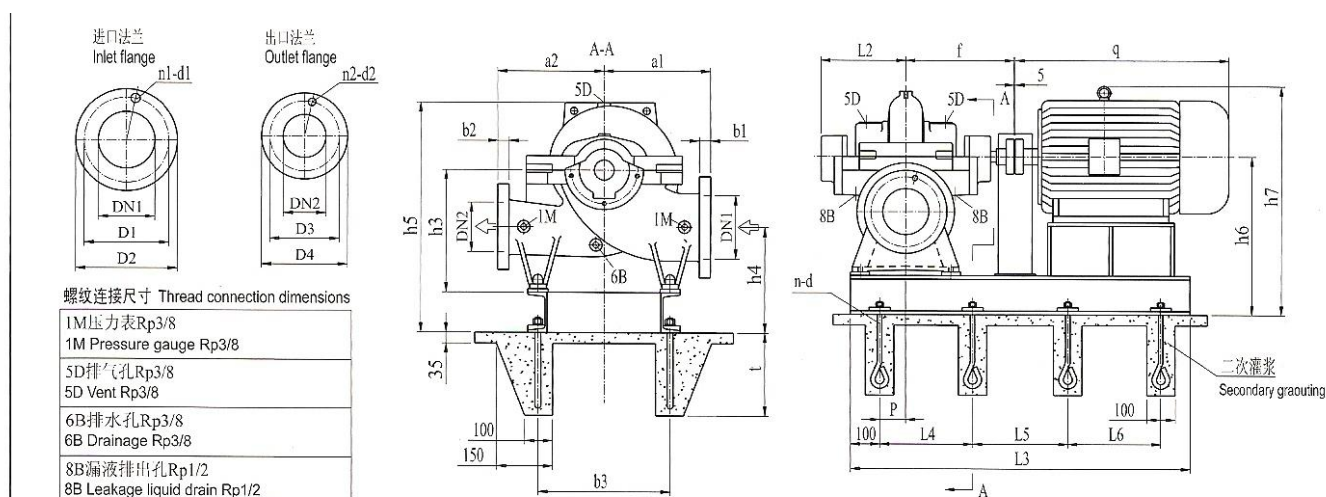

泵型号 Pump type	法兰尺寸 Flange dimension												a1	a2	f	h5≤	L2	h3	泵重量 Pump weight	
	DN1	D1	D2	n1-d1	b1	PN	DN2	D3	D4	n2-d2	b2	PN							泵重 Pump weight	含水 Water
250-370	300	410	460	12-φ28	32	1.6MPa	250	355	405	12-φ23	32	1.6MPa	500	500	655	1275	464	600	732	1
250-480	300	410	460	12-φ28	32	1.6MPa	250	355	405	12-φ28	32	1.6MPa	550	550	730	1275	515	600	912	1


泵型号 Pump Type	电机型号 Motor Type	功率 Power	电压 Voltage	防护等级 Protection grade	b3	h4	h6	h7	L3	L4/L5	L6	t	p	q	电机重量 Motor weight	底座重量 Base weight	地脚螺栓 Anchor bolt
250-370	Y280S-4	75	380V	IP44	700	680	780	1140	1690	745	-	400	150	1000	562	280	6-M20×4
	Y280M-4	90	380V	IP44	700	680	780	1140	1750	775	-	400	150	1050	667	280	6-M20×4
	Y315S-4	110	380V	IP44	700	680	780	1330	1810	805	-	400	150	1270	1000	480	6-M20×4
	Y315M-4	132	380V	IP44	700	680	780	1330	1860	830	-	400	150	1340	1100	480	6-M20×4
	Y315L-4	160	380V	IP44	700	680	780	1330	1890	845	-	400	150	1340	1240	480	6-M20×4
250-480	Y315S-4	110	380V	IP44	700	500	800	1350	1950	875	-	400	210	1270	1000	500	6-M20×4
	Y315M-4	132	380V	IP44	700	500	800	1350	2000	900	-	400	210	1340	1100	510	6-M20×4
	Y315L-4	160 200	380V	IP44	700	500	800	1350	2030	915	-	400	210	1340	1240	520	6-M20×4
	Y355M-4	250	380V	IP44	700	500	800	1305	2220	670	670	400	210	1545	1800	600	8-M20×4
	Y355L-4	280	380V	IP44	700	500	800	1305	2220	670	670	400	210	1545	1940	600	8-M20×4
	Y355-4	200-280	6kV	IP23	800	500	800	1205	2740	840	840	400	210	1790	2090	720	8-M20×4
	Y450-4	220-280	10kV	IP23	940	500	800	1300	2980	920	920	400	210	2050	2710	800	8-M20×4

S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
250-600(I)	994	276.1	126	1450	411	83	4.6	560	610
	1242	345	116		467	84			
	1490	413.9	105		520	82			
	933	259.2	108		333	82.5	4.5	450	568
	1166	323.9	100		380	83.5			
	1400	388.9	90		421	81.5			
	867	240.8	90		262	81.3	4.3	355	520
	1084	301	83		295	83			
	1300	361.1	73.5		322	81			
	800	222.2	74		201	80.3	4.0	250	475
	1000	277.8	66		218	82.5			
	1200	333.3	60		244	80.5			
250-600	835	232	114	1450	320	81.2	3.7	400	610
	1044	290	104		356	83			
	1253	348	91.5		381	82			
	772	214.4	98		255	80.8	3.6	315	568
	965	268.1	90		287	82.5			
	1158	321.6	80		311	81.3			
	700	194.4	80.3		192	80	3.3	250	520
	875	243.1	74.5		218	81.5			
	1050	291.7	66.0		235	80.3			
	640	177.7	67.5		149	79	3.1	200	475
	800	222.2	62.0		168	80.5			
	960	266.7	56.5		186	79.5			
300-300(I)	878	244	28.8	1450	83.8	82.3	5.3	110	330
	1098	305	24.5		85.2	86.5			
	1318	366	20		89.4	80.3			
	835	232	23.5		66.4	80.5	5.5	75	308
	1044	290	19.8		66.6	84.5			
	1253	348	15		63.2	81			
	806	224	19		52.8	79	5.7	55	287
	1008	280	15.5		51.9	82			
	1210	336	11.4		48.2	78			
	772	214	15		41.5	76	6.0	45	274
	965	268	11.5		37.8	80			
	1158	322	7.5		32	74			
	745	208	26.2		64.4	83	4.1	90	330
	936	260	23		69	85			

300-300	1123	312	20	1450	72.9	84	4.1	90	308
	691	192	24.0		56.2	80.5			
	864	240	20		56	84			
	1037	288	15.8		55.1	81	4.2	55	287
	639	178	20		45.5	76.5			
	800	222	16.7		44.9	81			
	960	267	13.5		44.6	79	4.3	45	374
	560	156	17.5		37.1	72			
	700	194	15		37.1	77			
	840	233	12		36.1	76			

安装外形尺寸图
 INSTALLATION DIMENSION

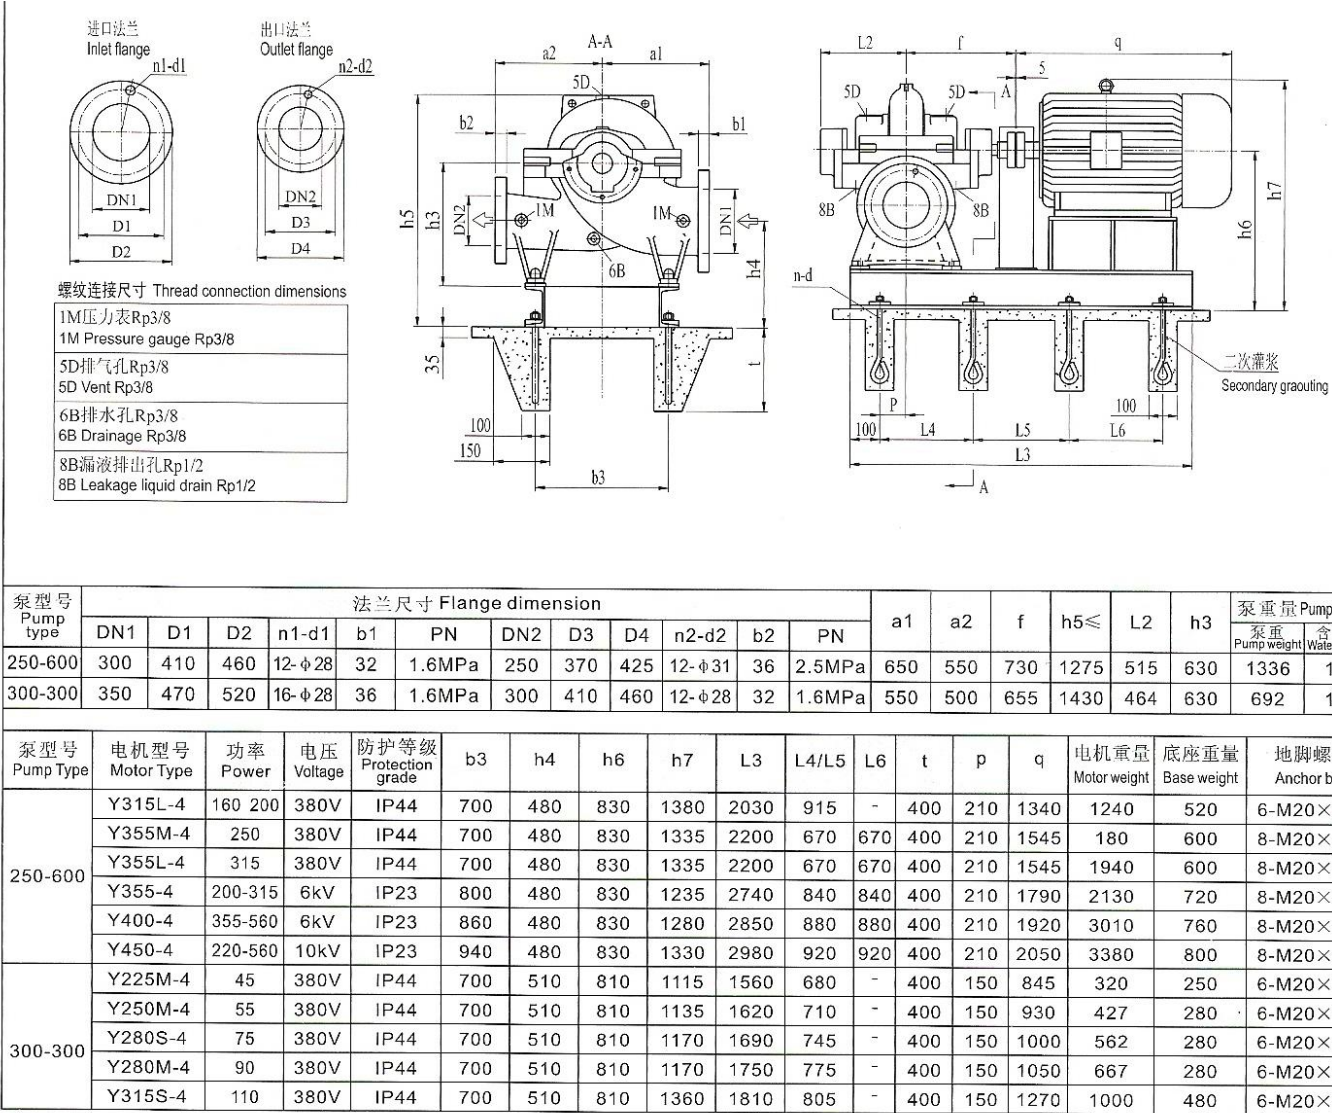


S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
300-435(I)	1342	373	60	1450	257	85.5	7.1	315	450
	1677	466	53		275	89			
	2012	559	46		295	85.5			
	1262	350	52		213	84	7.2	280	418
	1577	438	45		223	86.5			
	1892	526	37.5		230	84			
	1181	328	42.5		171	80	7.4	200	386
	1476	410	36.5		175	84			
	1771	492	28.5		172	80			
	1088	302	33.8		132	76	7.4	160	354
	1360	378	27.5		129	79			
	1530	425	24		128	78			
300-435	1396	360	57.5	1450	240	84.8	6.9	315	450
	1620	450	51.5		260	88			
	1944	540	43.5		273	84.5			
	1215	338	51.5		206	83	6.9	250	418
	1519	422	45		215	86.5			
	1823	506	37.5		222	84			
	1138	316	43.5		168	80.5	6.9	200	386
	1422	395	37.5		173	84			
	1706	474	30		174	80			
	1066	296	35		130	78	6.9	160	354
	1332	370	30.5		136	81.5			
	1598	444	24.5		138	77.5			
300-560(I)	1397	388	101.5	1450	454	85.2	5.7	630	553
	1746	485	94		520	87			
	2095	582	83.5		570	83.5			
	1316	366	83.5		357	83.8	6.4	450	506
	1645	457	76		389	85.5			
	1974	548	67		433	83.3			
	1258	350	68		281	83	6.7	355	466
	1573	437	62		313	85			
	1888	524	54		339	82			
	1213	337	57		232	81.2	7.2	280	426
	1516	421	50		247	83.5			
	1819	505	42		260	80			
	1238	344	88.5		359	83.2	5.15	450	553
	1548	430	80		399	85			

300-560	1858	516	70	1450	427	83	5.55	355	506
	1158	322	75		286	82.7			
	1447	402	67		316	83.5			
	1736	482	57		331	81.5	6.15	280	466
	1089	302	64		235	81			
	1361	378	57		255	83			
	1633	454	50		273	81.5	6.45	250	426
	1026	285	53		186	79.5			
	1282	356	47.5		204	82			
	1538	427	41		213	80.8			

安装外形尺寸图 INSTALLATION DIMENSION

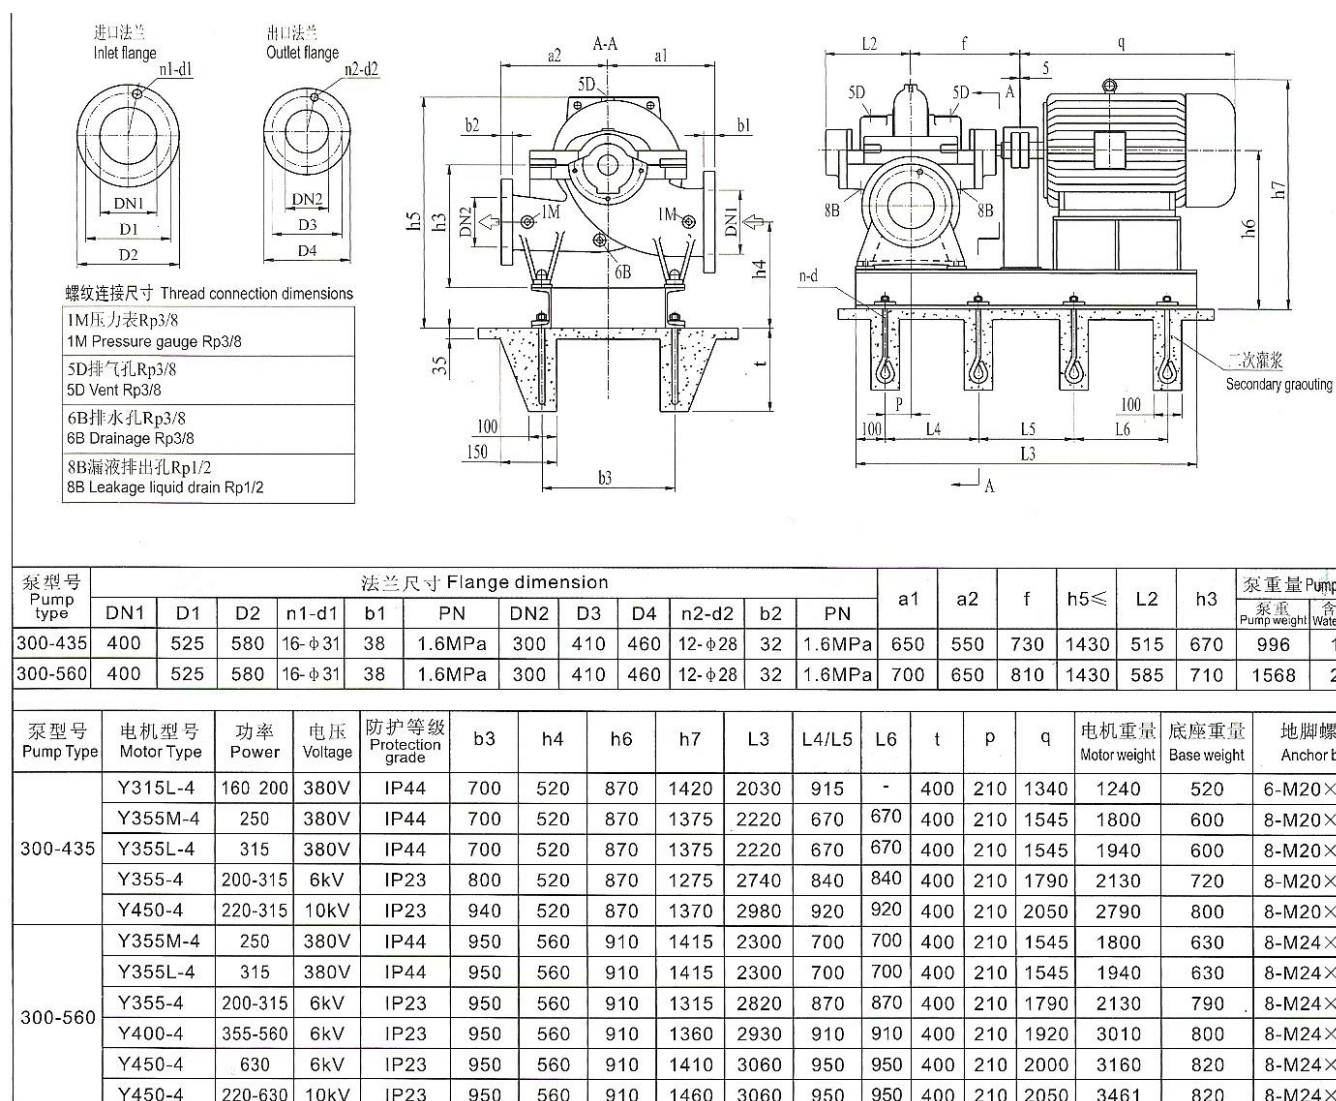


S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
350-700(I)	1469	408	170	1450	810	84	4.95	1120	705
	1836	510	160		941	86			
	2070	575	151		1011	84.2			
	1388	386	147		662	84	4.95	900	655
	1735	482	136		760	84.6			
	2082	578	125		854	83			
	1298	361	122		521	82.8	5.0	630/710	600
	1623	451	112		587	84.3			
	1948	541	100		647	82			
	1230	342	100		408	82.2	5.0	500/560	550
	1537	427	91		454	84			
	1845	512	80		500	80.5			
350-700	1350	375	152	1450	679	82.3	5.15	800/900	705
	1688	469	139		765	83.5			
	2026	563	124		840	81.5			
	1258	350	130		544	82	4.85	710	655
	1573	437	119		614	83			
	1888	524	105		667	81			
	1160	322	108		422	81	4.35	560	600
	1450	403	99		474	82.5			
	1740	483	87		512	80.5			
	1074	298	90		328	80.3	4.1	400	550
	1342	373	81		361	82			
	1610	447	71.5		391	80.3			
350-360(I)	1385	385	37.5	1450	171	83	8.1	200	382
	1731	481	32		175	86.5			
	2077	577	25		175	81			
	1354	376	32		146	81	8.4	160	357
	1692	470	26.5		144	85			
	2030	564	20		138	80			
	1313	365	26.5		120	78.8	8.7	132	332
	1641	456	21		113	83			
	1969	547	15		103	78			
	1282	356	20		91	76.3	8.9	110	300
	1602	445	15		81	80.5			
	1922	534	9		64	74			
	1138	316	35.5		133	83	6.2	160	382
	1422	395	31		140	85.5			

350-360	1706	474	25.8	1450	144	83.3	6.2	132	357
	1068	297	30.5		110	81			
	1335	371	26.3		114	84			
	1602	445	21.3		115	81	6.7	110	332
	1016	282	25.6		90	79			
	1270	353	22.5		95	82			
	1524	423	17.5		93	78	6.7	90	300
	950	264	21.5		74	75.5			
	1188	330	17.8		74	78			
	1397	388	13.7		71	74			

安装外形尺寸图 INSTALLATION DIMENSION

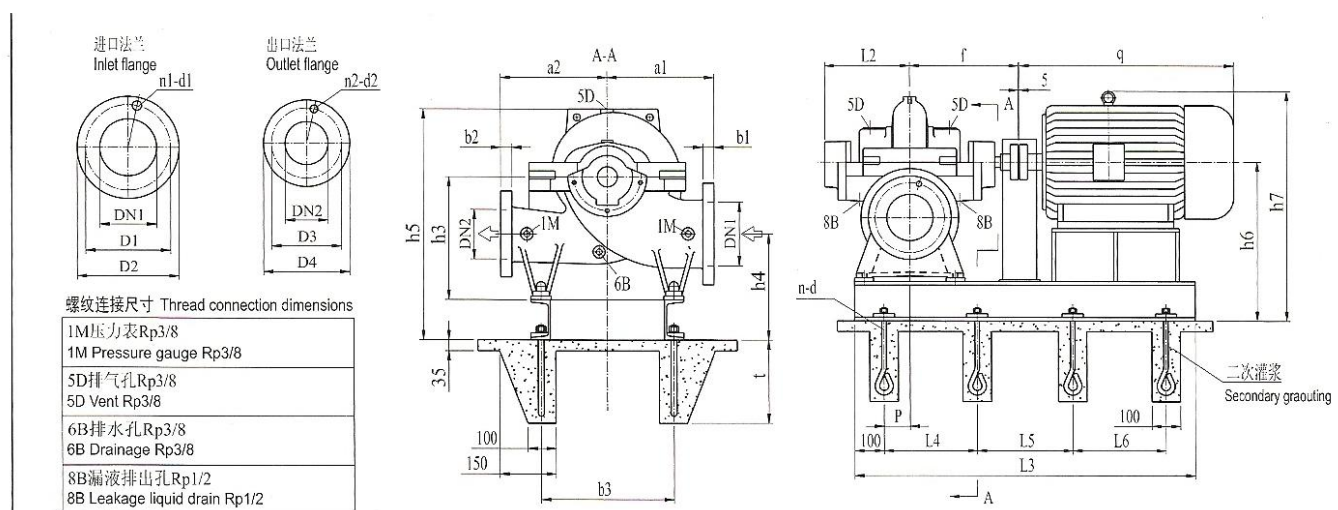

泵型号 Pump type	法兰尺寸 Flange dimension												a1	a2	f	h5≤	L2	h3	泵重量 Pump weight	
	DN1	D1	D2	n1-d1	b1	PN	DN2	D3	D4	n2-d2	b2	PN							泵重 Pump weight	含水 Water
350-700	400	525	580	16-φ31	38	1.6MPa	350	430	485	12-φ31	40	2.5MPa	750	650	810	1430	585	750	1860	2
350-360	400	525	580	16-φ31	38	1.6MPa	350	470	520	16-φ28	36	1.6MPa	650	550	730	1415	515	670	952	1


泵型号 Pump Type	电机型号 Motor Type	功率 Power	电压 Voltage	防护等级 Protection grade	b3	h4	h6	h7	L3	L4/L5	L6	t	p	q	电机重量 Motor weight	底座重量 Base weight	地脚螺栓 Anchor bolt
350-700	Y400-4	400-560	6kV	IP23	950	550	950	1400	2930	910	910	400	210	1920	3010	800	8-M30×80
	Y450-4	630-900	6kV	IP23	950	550	950	1450	3060	950	950	400	210	2000	3580	820	8-M30×80
	Y500-4	1000-1120	6kV	IP23	1080	550	950	1500	3230	1010	1010	400	210	2200	4500	890	8-M30×80
	Y450-4	400-630	10kV	IP23	950	550	950	1450	3060	950	950	400	210	2050	3461	820	8-M30×80
	Y500-4	710-1120	10kV	IP23	1080	550	950	1500	3230	1010	1010	400	210	2200	5150	890	8-M30×80
350-360	Y280M-4	90	380V	IP44	700	520	870	1230	1880	840	-	400	210	1050	667	480	6-M20×80
	Y315S-4	110	380V	IP44	700	520	870	1420	1950	875	-	400	210	1270	1000	500	6-M20×80
	Y315M-4	132	380V	IP44	700	520	870	1420	2000	900	-	400	210	1340	1100	510	6-M20×80
	Y315L-4	160-200	380V	IP44	700	520	870	1420	2030	915	-	400	210	1340	1240	520	6-M20×80

S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
350-430(I)	2194	610	49.5	1450	353	84	12.2	450	440
	2743	762	43.5		371	87.5			
	3292	914	35		371	84.7			
	2108	586	41.5		291	82	12.5	355	411
	2635	732	35		294	85.5			
	3162	878	27		281	82.8			
	2050	570	33		231	80	13.1	280	382
	2563	712	27.5		229	84			
	3076	854	20		210	80			
	1987	552	27		187	78	13.7	220	365
	2484	690	21.5		180	81			
	2981	828	15		160	76.3			
350-430	1786	496	48	1450	277	84.2	9.0	355	440
	2232	620	42.5		299	86.5			
	2678	744	35		303	84.2			
	1670	464	42.5		237	81.5	9.0	280	411
	2088	580	36		242	84.5			
	2506	696	28.8		240	82			
	1590	442	35		193	78.5	9.9	250	382
	1987	552	30		198	82			
	2384	662	23.5		195	78.2			
	1486	413	30		160	76	9.9	200	365
	1858	516	25		161	78.5			
	2230	619	18.5		148	76			
350-510(I)	2088	580	80	1450	529	86	10.0	630	518
	2610	725	70		562	88.5			
	3132	870	60		605	84.7			
	1944	540	68		426	84.5	10.7	500	482
	2430	675	60		456	87			
	2916	810	50		473	84			
	1786	496	57.5		345	81	11.0	400	445
	2232	620	50		353	86			
	2678	744	40		360	81			
	1656	460	45		267	76	11.5	315	408
	2070	575	38		271	79			
	2484	690	30		264	77			
	1958	544	76		466	87	9.9	560	518
	2448	680	67		508	88			

350-510	2938	816	57	1450	531	86	10.2	500	482
	1814	504	67.5		393	85			
	2268	630	59.5		422	87			
	2722	756	50		436	85	10.4	400	445
	1670	464	58		320	82.5			
	2088	580	50		335	85			
	2506	696	41.5		344	82.5	10.7	315	408
	1555	432	47.5		258	78			
	1944	540	41.5		265	83			
	2333	648	34.5		274	80			

安装外形尺寸图 INSTALLATION DIMENSION

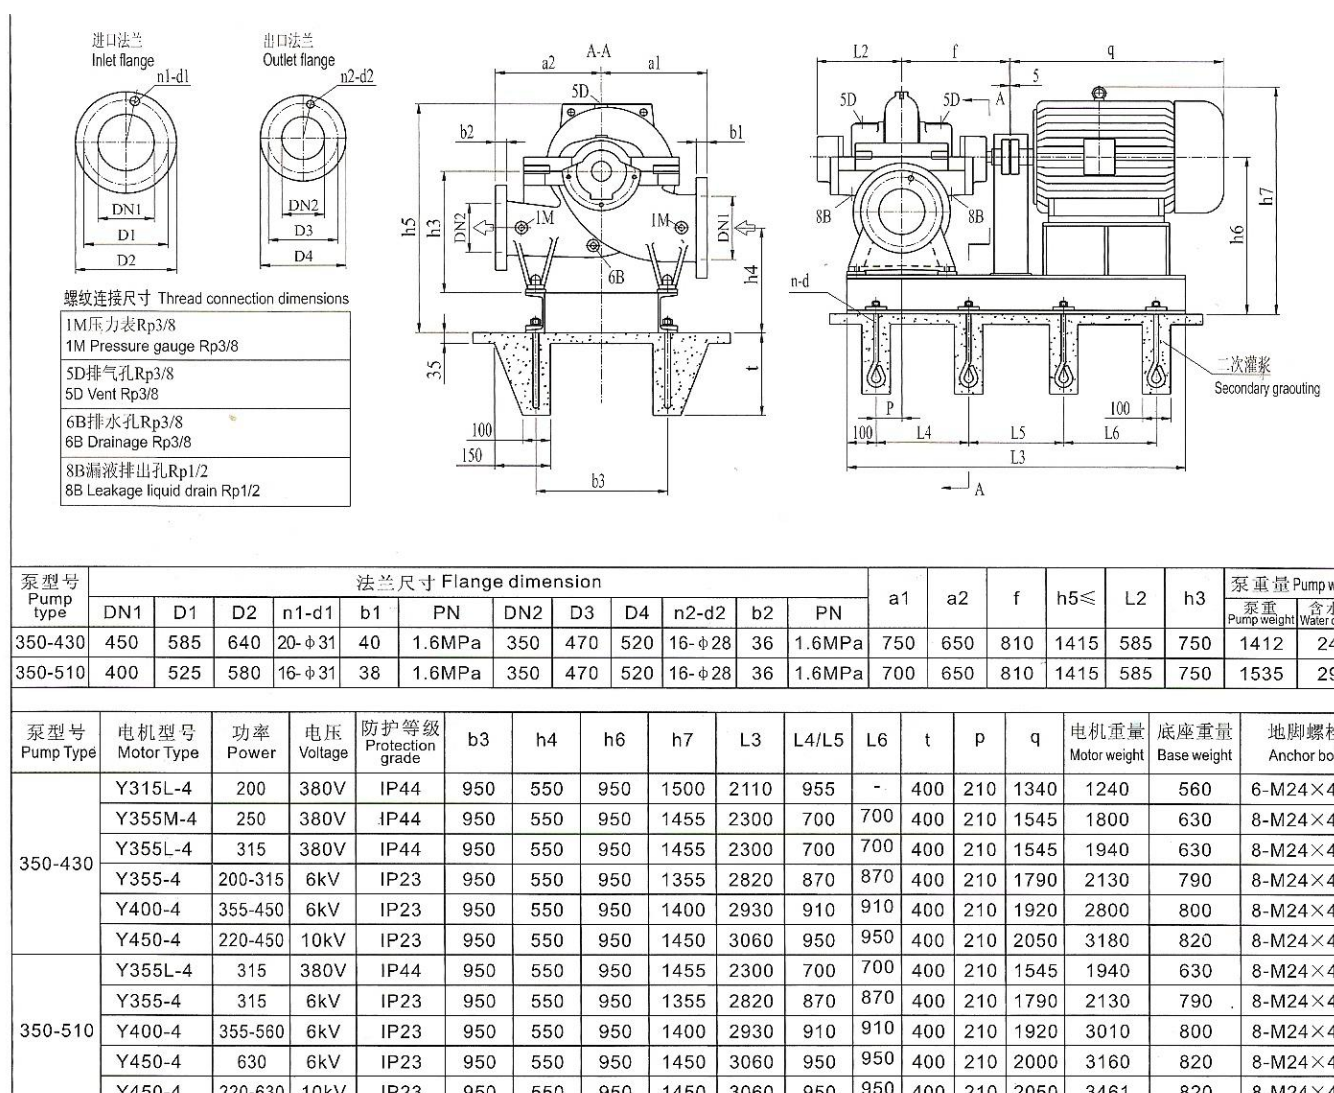


S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
350-620(I)	1320	366.7	139	1450	657	76	7.0	1000	640
	2200	611.1	125		881	85			
	2640	733.3	111		985	81			
	1200	333.3	129		552	76	6.5	900	610
	2100	583.3	116		743	85			
	2500	694.4	104		874	81			
	1130	313.9	118		478	76	5.8	800	580
	1900	527.8	107		651	85			
	2350	652.8	93		721	82.5			
	1100	305.6	108		426	76	5.5	630	550
	1830	508.3	94		566	84			
	2300	638.9	80		618	81			
	1020	283.3	94		343	76	5.2	560	510
	1700	472.2	83		457	84			
	2150	597.2	69		518	78			
400-540(I)	1570	436.1	98.5	1450	550	76.5	7.0	800/900	540
	2630	730.6	86		724	85			
	3420	950	70		825	79			
	1500	416.7	91		489	76	6.5	710/800	520
	2500	694.4	79.5		637	85			
	3250	902.8	64		717	79			
	1440	400	83		434	75	6.0	630	500
	2400	666.7	72		553	85			
	3120	866.7	57		612	79			
	1380	383.3	76		381	75	5.8	560	480
	2305	640.3	64		478	84			
	3000	833.3	50		517	79			
	1330	369.4	69		333	75	5.5	500	460
	2210	613.9	58		420	83			
	2880	800	44		442	78			
400-540	1320	366.7	77	1450	364	76	5.6	500	495
	2200	611.1	63.5		442	86			
	2860	794.4	48		473	79			
	1260	350	69.5		314	76	5.5	450	475
	2100	583.3	57		383	85			
	2730	758.3	41.5		395	78			
	1200	333.3	53.6		231	76	5.2	355	450
	1990	552.8	49.5		321	83.5			

	2500	694.4	37		327	77	5.0	315	425
	1110	308.3	54		218	75			
	1850	513.9	43		261	83			
	2340	650	33		277	76			

安装外形尺寸图 INSTALLATION DIMENSION

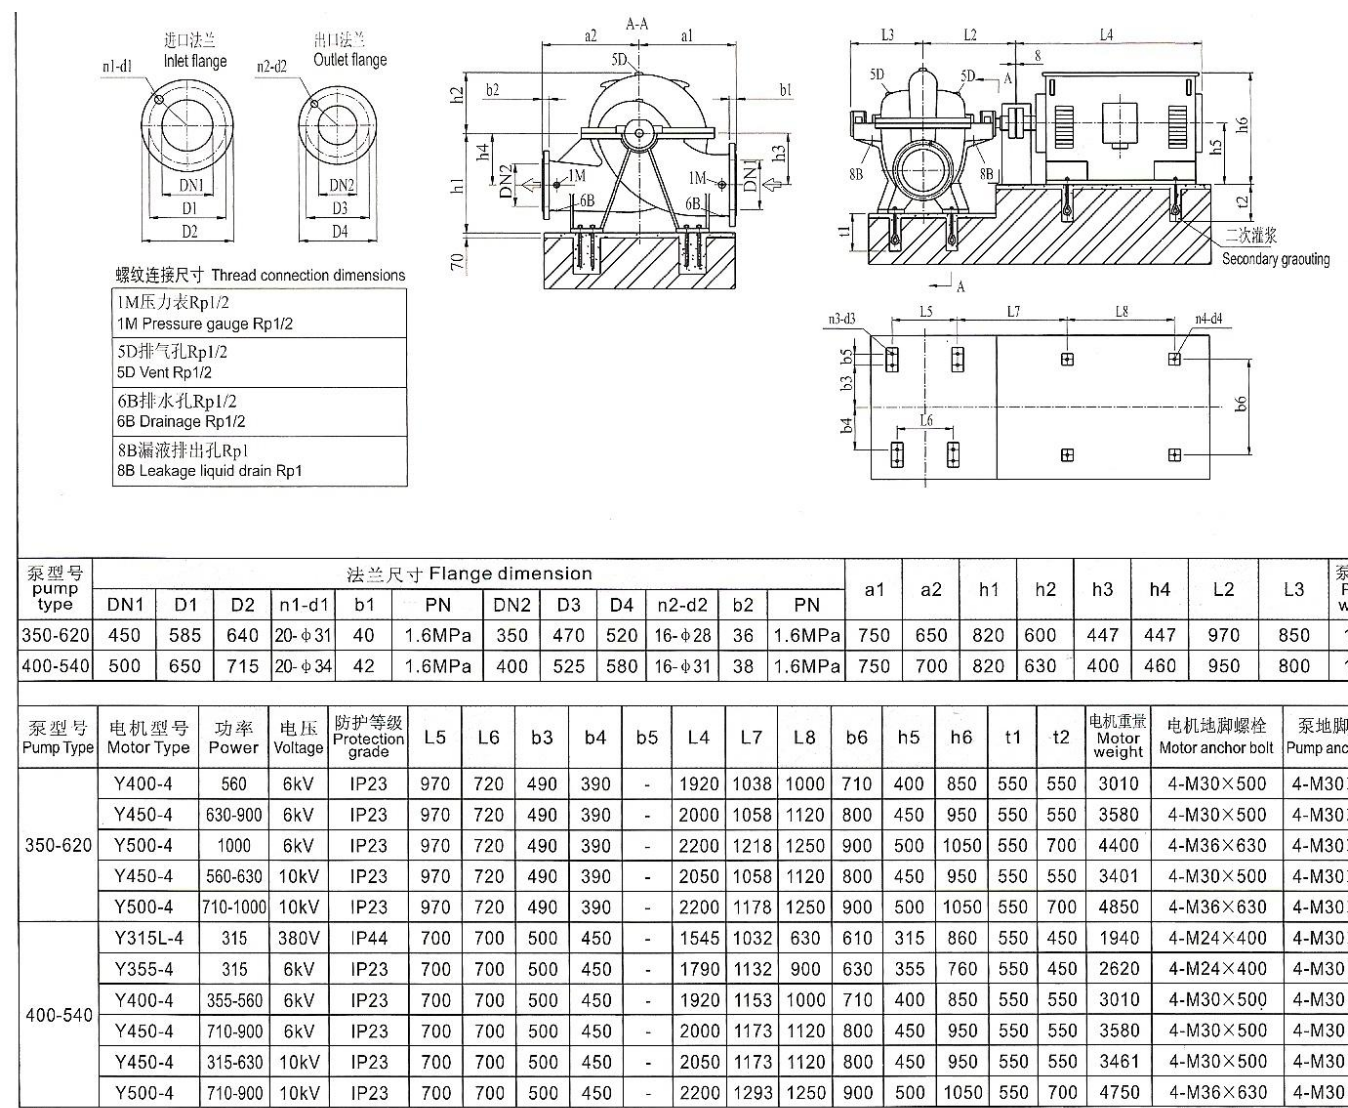

S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
400-620(I)	1890	525	129.5	1450	877	76	7.5	1250/1400	620
	3150	875	113		1127	86			
	4100	1139	93		1250	83			
	1800	500	119		767	76	7.0	1120	595
	3020	839	103		987	85.8			
	3920	1089	83		1080	82			
	1740	483	109		679	76	6.7	1120	570
	2895	804	92		847	85.6			
	3760	1044	87		1060	84			
	1650	458	99		577	77	6.0	800	545
	2760	767	83		729	85.5			
	3550	986	64		773	80			
	1580	439	89		491	78	5.7	710	520
	2630	731	72		603	85.5			
	3050	850	61.5		625	82			
400-620	1500	417	101.5	1450	545	76	6.8	800	555
	2485	690	90		708	86			
	3150	875	72		792	78			
	1440	400	94		485	76	6.5	710	535
	2400	667	82		624	85.8			
	3020	839	66		696	78			
	1440	400	79		409	75.8	5.5	630	515
	2310	642	74.5		547	85.7			
	2845	790	60		596	78			
	1330	369	79.8		385	75	6.3	560	495
	2220	617	67.5		480	85			
	2700	750	54		515	77			
	1265	351	70.5		328	74	6.0	500	470
	2110	586	60		405	85			
	2520	700	49.8		444	77			
500-510(I)	1945	540	33	960	239	73	5.5	280	530
	3240	900	25		253	87			
	3925	1090	18		241	80			
	1855	515	31		217	72	4.5	250	510
	3095	860	23		223	87			
	3800	1056	16.5		213	80			
	1785	495	28.5		192	72	4.0	220	490
	2975	826.4	21		196	87			

	3650	1014	14.3		180	79	4.0	200	470
	1680	466.7	23.2		147	72			
	2800	778	18.5		162	87			
	3420	950	13		155	78			
	1600	444.4	24		149	70	3.6	160	445
	2670	742	16.5		139	86			
	3150	815	12		134	77			
500-510	1465	407	31.3	960	176	71	4.8	220	505
	2775	771	22.5		197	86			
	3600	1000	14		174	79			
	1465	407	27.5		155	71	4.0	200	480
	2638	732	19.5		163	86			
	3430	953	12		142	79			
	1505	418	21.8		126	71	4.0	160	425
	2450	681	15.8		123	85.5			
	3185	885	9.3		104	78			
	1365	379	17.5		94.2	69	4.0	132	395
	2280	633	13.2		97.5	84			
	2965	824	8.0		83.9	77			

S 泵性能参数表 PERFORMANCE PARAMETERS

螺纹连接尺寸 Thread connection dimensions

1M 压力表 Rp1/2

1M Pressure gauge Rp1/2

5D 排气孔 Rp1/2

5D Vent Rp1/2

6B 排水孔 Rp1/2

6B Drainage Rp1/2

8B 漏液排出孔 Rp1




8B Leakage liquid drain Rp1

S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
500-640(I)	1875	521	52.5	960	372	72	6.0	500	640
	3528	980	41.5		450	88.5			
	4500	1250	30		454	81			
	1800	500	50		340	72	5.0	450	625
	3340	928	38.7		400	88			
	4210	1169	28.5		398	82			
	1710	475	46.5		301	72	5.0	400	605
	3170	881	36		353	88			
	4030	1119	26.5		359	81			
	1620	450	42.5		260	72	4.7	355	580
	3020	839	33.2		312	87.5			
	3830	1064	25		318	82			
	1530	425	37.5		217	72	4.5	315	545
	2800	778	29.8		261	87			
	3600	1000	22		270	80			
500-640	1800	500	42	960	267	77	5.0	355	580
	2990	931	34		318	87			
	3885	1079	23		316	77			
	1700	472	38		231	76	4.5	315	550
	2835	788	30.2		271	86			
	3685	1024	21		277	76			
	1640	456	33.8		201	75	4.3	280	520
	2730	758	27.8		240	86			
	3510	975	18.5		236	75			
	1545	429	20.6		167	74.5	4.0	250	490
	2575	715	24		198	85			
	3280	911	18		216	74.5			
500-700(I)	2270	631	73	960	586	77	6.0	900/1000	708
	3850	1069	65		770	88.5			
	5040	1400	54		926	80			
	2200	611	67.5		525	77	5.2	800	680
	3670	1019	59.5		675	88			
	4770	1325	48		789	79			
	2050	569	61		448	76	5.0	710	650
	3420	950	53		567	87			
	4350	1208	42.5		645	78			
	1920	533	55.7		388	75	4.5	560	625
	3200	889	47.8		484	86			

	3960	1110	39		546	77	4.5	500	600
	1810	503	50		333	74			
	3020	839	42		406	85			
	3560	989	35		446	76			
500-700	1800	500	60	960	392	75	6.0	560	660
	3005	835	49		461	87			
	3905	1085	35		496	75			
	1680	467	53.5		331	74	5.0	450	625
	2800	778	44.2		392	86			
	3640	1011	32.5		429	75			
	1600	444	47.5		284	73	4.3	400	590
	2640	733	39.4		333	85			
	3360	933	29.2		361	74			
	1450	403	41.4		227	72	4.0	355	555
	2410	669	34.5		269	84			
	3132	870	26.5		305	74			

S 泵性能参数表 PERFORMANCE PARAMETERS

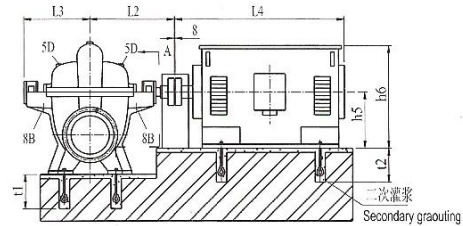						螺纹连接尺寸 Thread connection dimensions	
1M 压力表 Rp1/2 1M Pressure gauge Rp1/2		5D 排气孔 Rp1/2 5D Vent Rp1/2		6B 排水孔 Rp1/2 6B Drainage Rp1/2		8B 漏液排出孔 Rp1 8B Leakage liquid drain Rp1	

泵型号 pump type	法兰尺寸 Flange dimension												a1	a2	h1	h2	h3	h4	L2	L3	泵重量 Pump weight
	DN1	D1	D2	n1-d1	b1	PN	DN2	D3	D4	n2-d2	b2	PN									
500-640	600	725	780	20-φ31	36	1.0MPa	500	620	670	20-φ28	34	1.0MPa	950	800	980	600	495	495	870	700	2800
500-700	600	770	840	20-φ37	48	1.6MPa	500	650	715	20-φ34	42	1.6MPa	1050	850	1000	620	550	620	1080	840	3550


泵型号 Pump Type	电机型号 Motor Type	功率 Power	电压 Voltage	防护等级 Protection grade	L5	L6	b3	b4	b5	L4	L7	L8	b6	h5	h6	t1	t2	电机重量 Motor weight	电机地脚螺栓 Motor anchor bolt	泵地脚螺栓 Pump anchor bolt
500-640	Y355L-6	250	380V	IP44	850	850	450	450	-	1545	877	630	610	355	860	550	450	1990	4-M24×400	4-M30×500
	Y355-6	250	6kV	IP23	850	850	450	450	-	1790	978	900	630	355	760	550	450	2170	4-M24×400	4-M30×500
	Y400-6	280-400	6kV	IP23	850	850	450	450	-	1920	998	1000	710	400	850	550	550	2980	4-M30×500	4-M30×500
	Y450-6	450-500	6kV	IP23	850	850	450	450	-	2040	1058	1120	800	450	950	550	550	3240	4-M30×500	4-M30×500
	Y450-6	250-450	10kV	IP23	850	850	450	450	-	2050	1018	1120	800	450	950	550	550	3370	4-M30×500	4-M30×500
	Y500-6	500	10kV	IP23	850	850	450	450	-	2200	1138	1250	900	500	1050	550	700	4450	4-M36×630	4-M30×500
500-700	Y400-6	355-400	6kV	IP23	1000	800	500	450	120	1920	1133	1000	710	400	850	550	550	2980	4-M30×500	8-M30×500
	Y450-6	450-630	6kV	IP23	1000	800	500	450	120	2040	1193	1120	800	450	950	550	550	3490	4-M30×500	8-M30×500
	Y500-6	710-1000	6kV	IP23	1000	800	500	450	120	2200	1313	1250	900	500	1050	550	700	4700	4-M36×630	8-M30×500
	Y450-6	355-450	10kV	IP23	1000	800	500	450	120	2050	1153	1120	800	450	950	550	550	3295	4-M30×500	8-M30×500
	Y500-6	500-800	10kV	IP23	1000	800	500	450	120	2200	1313	1250	900	500	1050	550	700	5050	4-M36×630	8-M30×500
	Y560-6	900-1000	10kV	IP23	1000	800	500	450	120	2450	1388	1400	1000	560	1180	550	700	6415	4-M36×630	8-M30×500

S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
500-790(I)	2580	717	88.5	960	787	79	7.1	1120/1250	790
	3960	1100	80		969	89			
	5150	1431	68		1163	82			
	2160	600	80		603	78	6.0	900/1120	750
	3600	1000	72.8		811	88			
	4680	1300	62		975	81			
	1930	536	71		484	77	5.0	800	710
	3220	894	65.5		660	87			
	4100	1139	57		795	80			
	1710	475	62		380	76	4.5	630/710	670
	2850	792	58		523	86			
	3600	1000	51.8		643	79			
500-790	2375	660	70.8	960	572	80	5.8	800	710
	3492	970	62.5		675	88			
	4550	1264	48		793	75			
	2000	556	64		447	78	5.0	710	675
	3330	925	56		584	87			
	4350	1208	44		695	75			
	1900	528	57		383	77	4.5	560/630	640
	3150	875	50		499	86			
	4150	1153	39.3		600	74			
	1780	494	49		312	76	4.0	500/560	605
	2970	825	43.6		415	85			
	3900	1083	36		516	74			
500-890(I)	2520	700	124	960	1119	76	7.0	1600/1800	920
	4230	1175	112		1449	89			
	5500	1528	95.5		1787	80			
	2400	667	112		963	76	6.0	1400/1600	870
	4000	1111	100		1237	88			
	5200	1444	86		1541	79			
	2270	631	102.5		845	75	6.0	1250/1400	825
	3790	1053	90.5		1073	87			
	4930	1369	77		1325	78			
	2150	597	90		712	74	5.5	1120	775
	3550	986	80.5		905	86			
	4320	1200	70.5		1077	77			
	2160	600	101		761	78	5.9	1120/1250	840
	3600	1000	90		997	88.5			

500-890	4680	1300	73	960	1163	80	5.0	1000/1120	805
	2100	583	94.7		703	77			
	3480	967	83.5		899	88			
	4520	1256	68		1059	79			
	2010	558	88		634	76	4.5	900/1000	770
	3350	931	77.8		806	88			
	4290	1192	63		943	78			
	1920	533	82		571	75			
	3200	889	71.5		716	87	4.2	800/900	735
	4020	1117	60		853	77			
	1840	511	75		508	74			
	3060	850	66		639	86	4.0	800	700
	3780	1050	56		758	76			

S 泵性能参数表 PERFORMANCE PARAMETERS

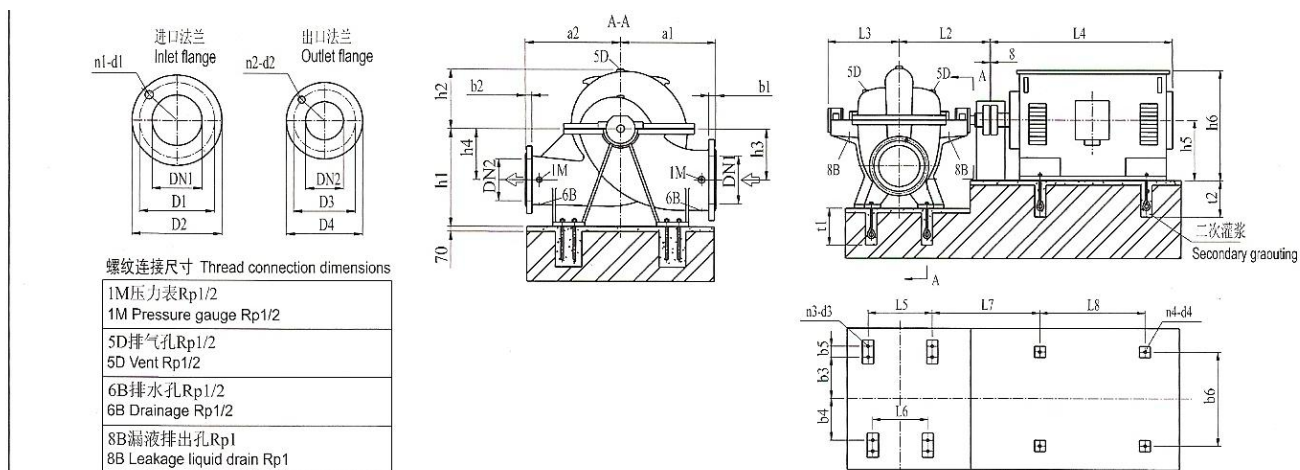

泵型号 pump type	法兰尺寸 Flange dimension												a1	a2	h1	h2	h3	h4	L2	L3	泵重 Pump weight
	DN1	D1	D2	n1-d1	b1	PN	DN2	D3	D4	n2-d2	b2	PN									
500-790	600	770	840	20-φ37	48	1.6MPa	500	650	715	20-φ34	42	1.6MPa	1050	900	1050	660	600	600	1130	860	420
500-890	600	770	840	20-φ37	48	1.6MPa	500	650	715	20-φ34	42	1.6MPa	1050	950	1100	710	650	650	1150	880	460


泵型号 Pump Type	电机型号 Motor Type	功率 Power	电压 Voltage	防护等级 Protection grade	L5	L6	b3	b4	b5	L4	L7	L8	b6	h5	h6	t1	t2	电机重量 Motor weight	电机地脚螺栓 Motor anchor bolt	泵地脚螺栓 Pump anchor
500-790	Y450-6	500-630	6kV	IP23	1000	840	500	450	120	2040	1243	1120	800	450	950	550	550	3490	4-M30×500	8-M30×500
	Y500-6	710-1000	6kV	IP23	1000	840	500	450	120	2200	1363	1250	900	500	1050	550	700	4700	4-M36×630	8-M30×500
	Y560-6	1120-1250	6kV	IP23	1000	840	500	450	120	2400	1438	1400	1000	560	1180	550	700	6415	4-M36×630	8-M30×500
	Y500-6	500-800	10kV	IP23	1000	840	500	450	120	2200	1363	1250	900	450	1050	550	700	5050	4-M36×630	8-M30×500
	Y560-6	900-1250	10kV	IP23	1000	840	500	450	120	2450	1438	1400	1000	500	1180	550	700	6920	4-M36×630	8-M30×500
500-890	Y500-6	800-1000	6kV	IP23	1000	880	500	450	150	2200	1383	1250	900	500	1050	700	700	4700	4-M36×630	8-M36×630
	Y560-6	1120-1400	6kV	IP23	1000	880	500	450	150	2400	1458	1400	1000	560	1180	700	700	6670	4-M36×630	8-M36×630
	Y630-6	1600-1800	6kV	IP23	1000	880	500	450	150	2800	1488	1600	1120	630	1920	700	850	9720	4-M42×800	8-M36×630
	Y500-6	800	10kV	IP23	1000	880	500	450	150	2200	1383	1250	900	500	1050	700	700	5050	4-M36×630	8-M36×630
	Y560-6	900-1250	10kV	IP23	1000	880	500	450	150	2450	1458	1400	1000	560	1180	700	700	6920	4-M36×630	8-M36×630
	Y630-6	1400-1800	10kV	IP23	1000	880	500	450	150	2800	1488	1600	1120	630	1920	700	850	10500	4-M42×800	8-M36×630

S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
600-540(I)	2810	781	33.3	960	344	74	5.9	400	570
	4680	1300	24.2		354	87			
	6080	1689	14.3		316	75			
	2660	739	33.7		334	73	5.0	355	540
	4430	1231	21.5		302	86			
	5690	1581	13		272	74			
	2430	675	25		230	72	4.5	250	510
	4040	1122	17.8		230	85			
	5220	1450	11		214	73			
	2270	631	21.5		187	71	4.2	220	480
	3780	1050	15.5		190	84			
	4850	1347	10		184	72			
600-540	2370	658	28.3	960	250	73	6.0	315	531
	3960	1100	20.3		257	85			
	4900	1361	13.3		240	74			
	2250	625	28.8		245	72	5.8	250	507
	3750	1042	18		219	84			
	4600	1278	11.5		197	73			
	2070	575	22.3		177	71	5.0	200	483
	3450	958	15.5		175	83			
	4250	1181	10		158	73			
	1890	525	19.3		142	70	4.0	160	459
	3150	875	13		136	82			
	4000	1111	8.5		128	72			
600-620(I)	2830	786	48	960	493	75	7.8	630	620
	4720	1311	39		569	88			
	5940	1650	30		599	81			
	2650	736	42		404	75	6.5	560	585
	4420	1228	34		470	87			
	5580	1550	26		494	80			
	2450	681	36		324	74	6.0	450	550
	4080	1133	29		375	86			
	5040	1400	23.2		398	80			
	2250	625	30		252	73	5.0	355	515
	3750	1042	24.8		298	85			
	4500	1250	20		310	79			
	2215	615	40.5		326	75	6.0	450	578
	3690	1025	33		381	87			

600-620	4680	1300	25	960	398	80	5.0	355	545
	2060	572	35		265	74			
	3440	956	29		316	86			
	4400	1222	22		334	79	4.7	280/315	515
	1900	528	30		213	73			
	3170	881	25		254	85			
	3980	1106	20		278	78	4.5	250	485
	1770	492	26		174	72			
	2050	819	21.5		206	84			
	3600	1000	18		229	77			

S 泵性能参数表 PERFORMANCE PARAMETERS

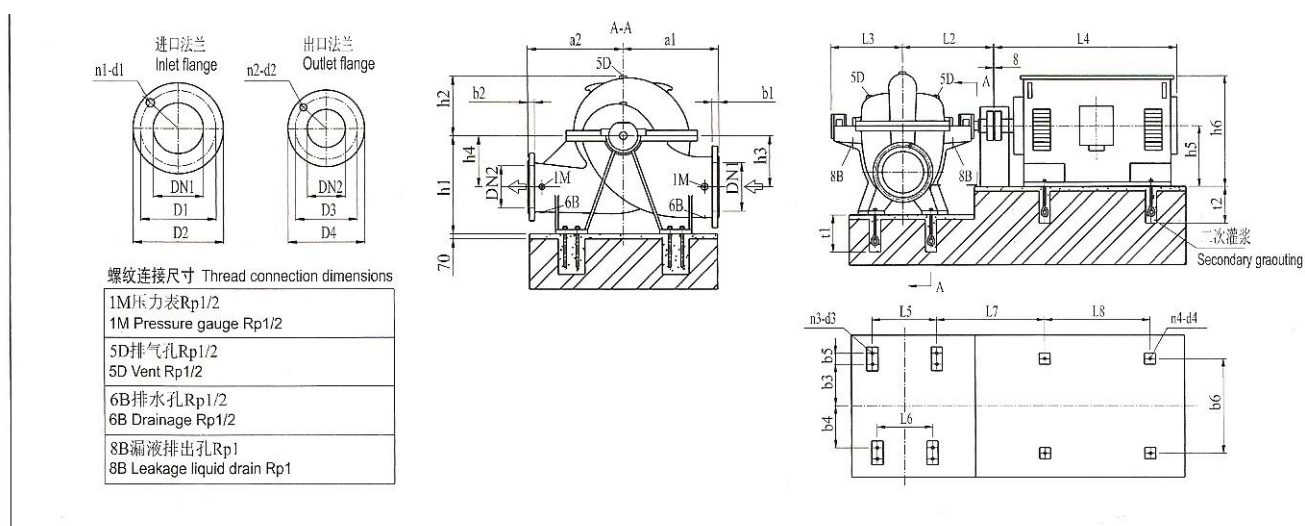

泵型号 pump type	法兰尺寸 Flange dimension												a1	a2	h1	h2	h3	h4	L2	L3	泵重 Pump weight
	DN1	D1	D2	n1-d1	b1	PN	DN2	D3	D4	n2-d2	b2	PN									
600-540	700	840	895	24-φ31	40	1.0MPa	600	725	780	20-φ31	36	1.0MPa	1000	900	1050	750	550	550	1000	780	330
600-620	700	840	895	24-φ31	40	1.0MPa	600	725	780	20-φ31	36	1.0MPa	1000	1000	1050	650	550	550	1040	820	360


泵型号 Pump Type	电机型号 Motor Type	功率 Power	电压 Voltage	防护等级 Protection grade	L5	L6	b3	b4	b5	L4	L7	L8	b6	h5	h6	t1	t2	电机重量 Motor weight	电机地脚螺栓 Motor anchor bolt	泵地脚螺栓 Pump anchor
600-540	Y355M-6	160-200	380V	IP44	1000	800	500	450	100	1545	940	560	610	355	860	450	450	1750	4-M24×400	8-M24×400
	Y355L-6	250	380V	IP44	1000	800	500	450	100	1545	940	630	610	355	860	450	450	1990	4-M24×400	8-M24×400
	Y355-6	185-250	6kV	IP23	1000	800	500	450	100	1790	1033	900	630	355	760	450	450	2170	4-M24×400	8-M24×400
	Y400-6	280-400	6kV	IP23	1000	800	500	450	100	1920	1053	1000	710	400	850	450	550	2980	4-M30×500	8-M24×400
	Y450-6	220-400	10kV	IP23	1000	800	500	450	100	2050	1073	1120	800	450	950	450	550	3295	4-M30×500	8-M24×400
600-620	Y355L-6	250	380V	IP44	1000	800	500	500	100	1545	980	630	610	355	860	450	450	1990	4-M24×400	8-M24×400
	Y355-6	250	6kV	IP23	1000	800	500	500	100	1790	1073	900	630	355	760	450	450	2170	4-M24×400	8-M24×400
	Y400-6	280-400	6kV	IP23	1000	800	500	500	100	1920	1093	1000	710	400	850	450	550	2980	4-M30×500	8-M24×400
	Y450-6	450-630	6kV	IP23	1000	800	500	500	100	2040	1153	1120	800	450	950	450	550	3490	4-M30×500	8-M24×400
	Y450-6	250-450	10kV	IP23	1000	800	500	500	100	2050	1113	1120	800	450	950	450	550	3377	4-M30×500	8-M24×400
	Y500-6	500-630	10kV	IP23	1000	800	500	500	100	2200	1273	1250	900	500	1050	450	700	4790	4-M36×630	8-M24×400

S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
600-710(I)	2780	772	69	960	653	80	6.5	900	715
	4630	1286	58.5		828	89			
	6050	1680	43.5		896	80			
	2600	722	60.5		542	79	5.5	800	675
	4320	1200	50		668	88			
	5620	1561	36		697	79			
	2430	675	53		449	78	5.0	630	640
	4050	1125	43		545	87			
	5220	1450	31		565	78			
	2270	630	45		361	77	4.5	500	600
	3780	1050	35		419	86			
	4680	1300	27		447	77			
600-710	2160	600	64.5	960	486	78	5.2	710	690
	3600	1000	54		601	88			
	4680	1300	38		621	78			
	1990	553	54.6		384	77	5.0	560	650
	3310	919	45.8		474	87			
	4300	1194	33		502	77			
	1880	522	48.2		325	76	5.0	450	615
	3130	869	40.5		401	86			
	4060	1128	30.5		444	76			
	1740	483	41		259	75	5.0	400	575
	2900	806	35		325	85			
	3670	1019	28		373	75			
600-830(I)	3300	917	105	960	1194	79	8.5	1600/1800	870
	5500	1528	87.5		1472	89			
	6950	1931	70		1615	82			
	3060	850	93		993	78	7.0	1400	826
	5110	1419	76		1201	88			
	6480	1800	57		1183	85			
	2800	778	82		812	77	6.2	1120/1400	770
	4680	1300	62		908	87			
	5800	1611	57		1230	86			
	2610	725	70		654	76	5.8	900	720
	4350	1208	56		762	87			
	5040	1400	47		786	82			
	2600	722	79		717	78	6.0	1000	770
	4320	1200	66.2		885	88			


600-830	5620	1561	51	960	979	80	5.4	800	730
	2460	683	71.4		613	78			
	4100	1139	58		744	87			
	5320	1478	42		770	79	5.0	710/800	690
	2300	639	62.8		504	78			
	3820	1061	50		598	87			
	4950	1375	48		779	83	4.5	560	650
	2080	578	55		404	77			
	3460	961	42.5		465	86			
	4250	1181	32		469	79			

S 泵性能参数表 PERFORMANCE PARAMETERS



螺纹连接尺寸 Thread connection dimensions

1M 压力表 Rp1/2
1M Pressure gauge Rp1/2
5D 排气孔 Rp1/2
5D Vent Rp1/2
6B 排水孔 Rp1/2
6B Drainage Rp1/2
8B 漏液排出孔 Rp1
8B Leakage liquid drain Rp1




S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
700-590(I)	3900	1083	38.8	960	549	75	8.0	710	565
	6480	1800	30		608	87			
	8060	2239	22.7		623	80			
	3780	1050	35.5		487	75	7.5	630	550
	6300	1750	28		558	86			
	7800	2167	21.2		570	79			
	3630	1008	32		427	74	7.0	560	535
	6050	1681	26		498	86			
	7450	2069	20.9		537	79			
	3500	972	29		373	74	7.0	500	520
	5870	1631	24		451	85			
	7000	1944	20		489	78			
700-590	2980	828	35.2	960	376	76	6.0	400	586
	4970	1381	23.7		369	87			
	6500	1806	10.2		237	76			
	2850	792	36		367	76	6.0	400	562
	4750	1319	21.6		325	86			
	6150	1708	10.5		232	76			
	2750	764	28		276	76	5.0	315	539
	4540	1261	20		287	86			
	5900	1639	10.5		222	76			
	2610	725	25		234	76	4.5	280	516
	4350	1208	18		251	85			
	5550	1542	10		199	76			
700-710(I)	3650	1014	58.5	960	775	75	8.0	1000	706
	6500	1806	44		895	87			
	8460	2350	28		827	78			
	3750	1042	53.8		733	75	7.7	900	680
	6270	1742	40.2		798	86			
	8060	2239	26		731	78			
	3570	992	49.5		650	74	7.3	800	655
	5950	1653	37		697	86			
	7560	2100	25.5		672	78			
	3450	958	45		571	74	7.0	710	630
	5740	1594	34		618	86			
	7100	1972	23.8		590	78			
	3360	933	51.5		637	74	7.0	800	648
	5600	1556	39.5		700	86			

700-710	7280	2022	28	960	711	78	6.5	710	622
	3180	883	45.5		532	74			
	5300	1472	35		594	85			
	6550	1819	26.5		606	78	6.0	560	600
	3020	839	41		455	74			
	5040	1400	31.5		508	85			
	6200	1722	24.5		530	78	6.0	500	575
	2780	772	35.8		371	73			
	4630	1286	27.5		413	84			
	5760	1600	21		428	77			

S 泵性能参数表 PERFORMANCE PARAMETERS

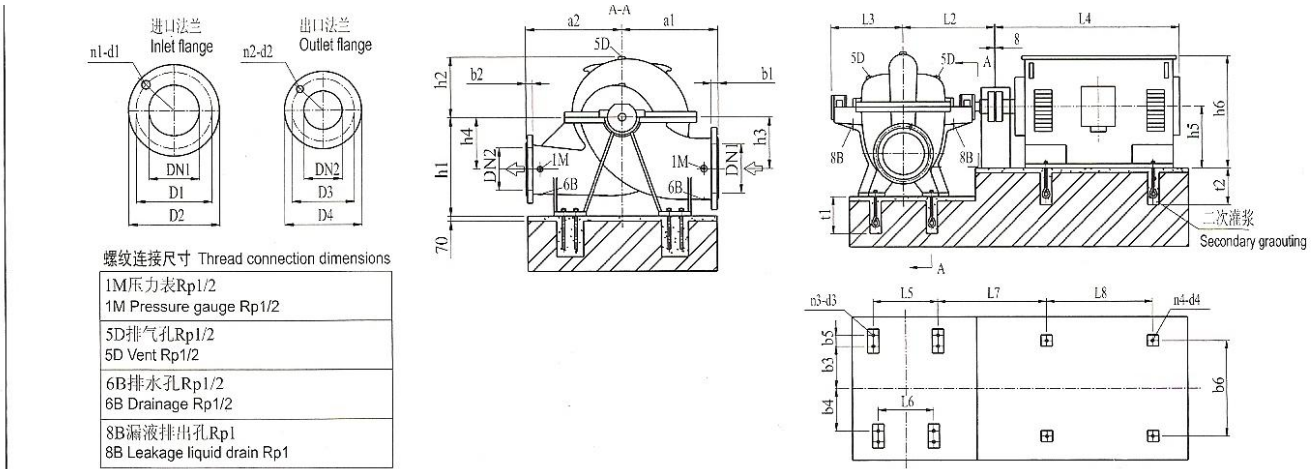

泵型号 pump type	法兰尺寸 Flange dimension											a1	a2	h1	h2	h3	h4	L2	L3	泵重 weight	
	DN1	D1	D2	n1-d1	b1	PN	DN2	D3	D4	n2-d2	b2										PN
700-590	800	950	1015	24-φ34	44	1.0MPa	700	840	895	24-φ31	40	1.0MPa	1200	1000	1150	720	600	600	1250	1040	4800
700-710	800	950	1015	24-φ34	44	1.0MPa	700	840	895	24-φ31	40	1.0MPa	1200	1150	1170	750	620	620	1300	1050	6400


泵型号 Pump Type	电机型号 Motor Type	功率 Power	电压 Voltage	防护等级 Protection grade	L5	L6	b3	b4	b5	L4	L7	L8	b6	h5	h6	t1	t2	电机重量 Motor weight	电机地脚螺栓 Motor anchor bolt	泵地脚螺栓 Pump anchor
700-590	Y400-6	280-400	6kV	IP23	1100	850	650	500	100	1920	1253	1000	710	400	850	450	550	2980	4-M30×500	8-M24×
	Y450-6	450-630	6kV	IP23	1100	850	650	500	100	2040	1313	1120	800	450	950	450	550	3490	4-M30×500	8-M24×
	Y500-6	710	6kV	IP23	1100	850	650	500	100	2200	1433	1250	900	500	1050	450	700	4100	4-M36×630	8-M24×
	Y450-6	280-450	10kV	IP23	1100	850	650	500	100	2050	1273	1120	800	450	950	450	550	3377	4-M30×500	8-M24×
	Y500-6	500-710	10kV	IP23	1100	850	650	500	100	2200	1433	1250	900	500	1050	450	700	4930	4-M36×630	8-M24×
700-710	Y450-6	500-630	6kV	IP23	1100	850	650	600	120	2040	1363	1120	800	450	950	550	550	3490	4-M30×500	8-M30×
	Y500-6	710-1000	6kV	IP23	1100	850	650	600	120	2200	1483	1250	900	500	1050	550	700	4700	4-M36×630	8-M30×
	Y500-6	500-800	10kV	IP23	1100	850	650	600	120	2200	1483	1250	900	500	1050	550	700	5050	4-M36×630	8-M30×
	Y560-6	900-1000	10kV	IP23	1100	850	650	600	120	2450	1558	1400	1000	560	1180	550	700	6415	4-M36×630	8-M30×

S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
700-820(I)	4430	1231	92	960	1387	80	8.8	2000	835
	7380	2050	80		1806	89			
	9600	2667	60		1912	82			
	4180	1161	82.6		1175	80	8.0	1600	790
	6960	1933	68		1464	88			
	9050	2514	49		1400	81			
	3930	1092	71.5		968	79	7.0	1400	750
	6550	1819	58		1189	87			
	8430	2342	43		1233	80			
	3600	1000	60		754	78	6.3	1000	705
	6010	1669	48		913	86			
	7500	2083	36		930	79			
700-820	3240	900	72.8	960	834	77	6.8	1120	735
	5400	1500	60		1002	88			
	6600	1833	46		1020	81			
	2970	825	65		683	77	6.0	900	695
	4950	1375	53.8		833	87			
	5900	1639	42		843	80			
	2640	733	56.6		535	76	5.5	710	655
	4400	1222	47		655	86			
	5260	1461	39		698	80			
	2340	650	49		416	75	5.0	630	615
	3900	1083	41.5		518	85			
	4620	1283	35.5		565	79			
800-740(I)	5400	1500	37.8	725	751	74	7.0	800	790
	9000	2500	27		760	87			
	11000	3056	18.2		681	80			
	5200	1444	34.5		660	74	6.3	710	757
	8640	2400	24.3		665	86			
	10300	2861	16.5		589	79			
	4970	1381	31.6		578	74	6.0	630	723
	8280	2300	22.3		584	86			
	9850	2736	14.8		502	79			
	4700	1306	29		571	74	5.5	560	690
	7850	2180	20		497	86			
	9200	2556	14		444	79			
	4360	1211	30.8		487	75	7.2	560	720
	7270	2019	22.2		511	86			

800-740	9150	2542	13	725	432	75	7.0	500	690
	4170	1158	28.6		433	75			
	6950	1931	20.6		459	85			
	8720	2422	12.5		396	75	6.0	450	660
	3960	1100	26		379	74			
	6600	1833	18.5		396	84			
	8250	2292	11.4		346	74	6.0	400	630
	3760	1044	23.8		334	73			
	6260	1739	16.5		335	84			
	7700	2139	10.5		297	74			

S 泵性能参数表 PERFORMANCE PARAMETERS

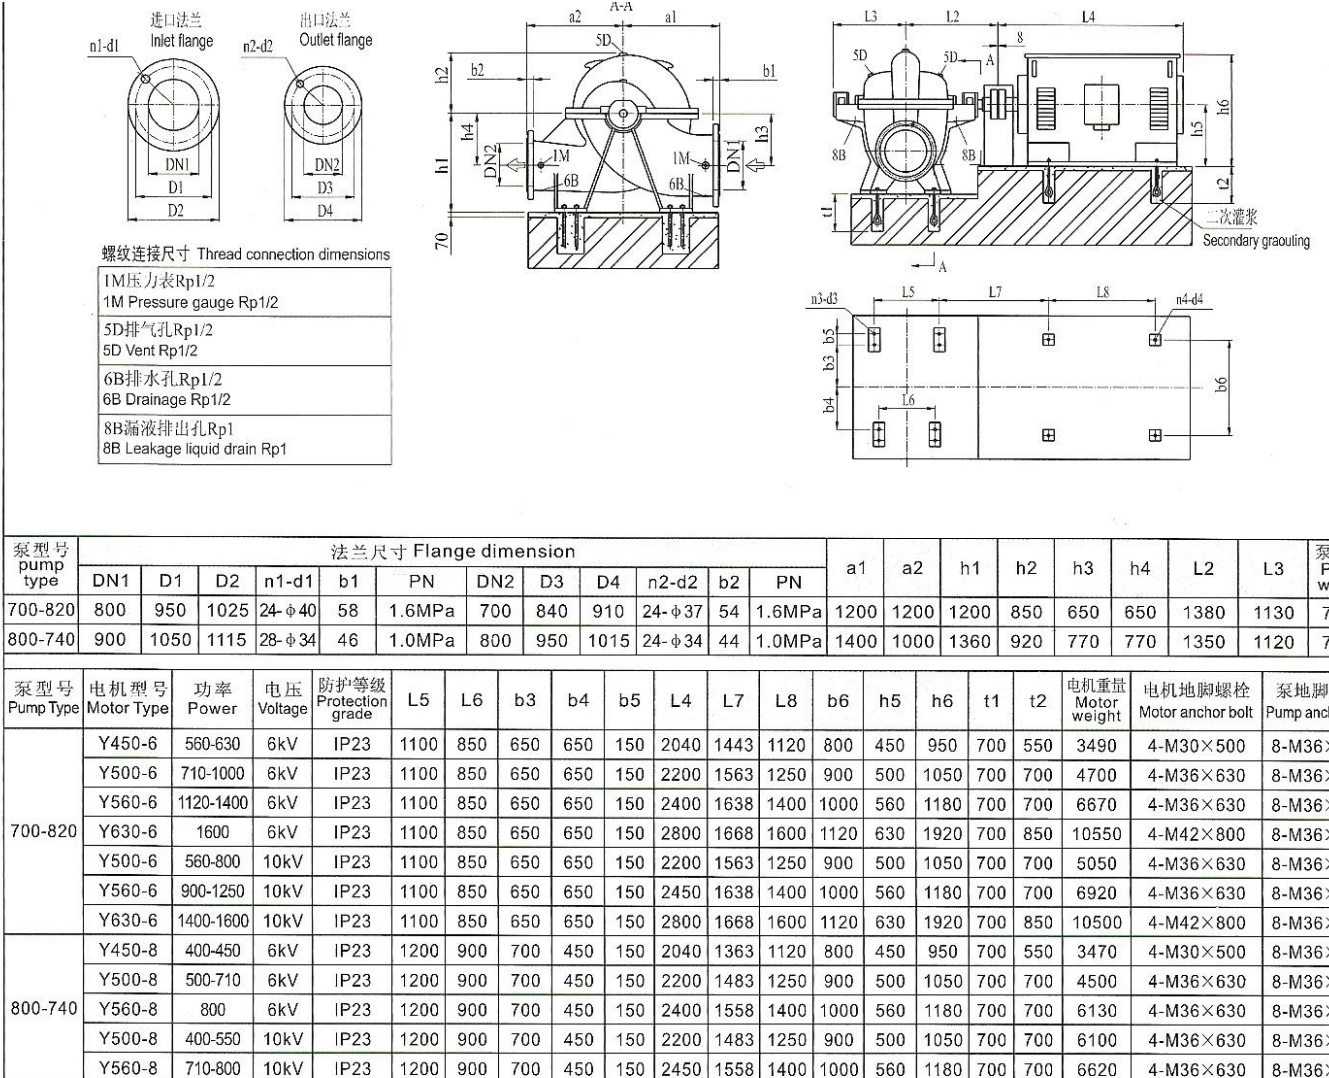

S 泵性能参数表 PERFORMANCE PARAMETERS

泵型号 Type	流量 Capacity		扬程 Head m	转速 Speed r/min	轴功率 Shaft Power kw	效率 Eff η %	有效汽蚀余量 NPSHr m	电机功率 Motor Power kw	叶轮参考直径 Impeller Diameter mm
	m3/h	l/s							
800-840(I)	5400	1500	56.4	725	1063	78	6.3	1400	885
	9000	2500	46		1281	88			
	11700	3250	34.5		1391	79			
	5200	1444	52.2		947	78	6.0	1250	850
	8650	2403	42.3		1145	87			
	11160	3100	32		1231	79			
	4960	1378	47.5		833	77	5.5	1120	810
	8260	2204	38.5		1007	86			
	10600	2944	30		1096	79			
	4710	1308	43		754	78	5.3	1000	775
	7850	2181	35.4		880	86			
	10200	2833	26.8		954	78			
	4470	1242	38.5		625	75	5.0	900	735
	7450	2069	32.2		768	85			
	9700	2694	24.3		833	77			
800-840	4500	1250	53	725	854	76	6.0	1120	840
	7500	2083	43		1009	87			
	9750	2708	31.3		1093	76			
	4300	1194	47.5		741	75	5.2	1000	805
	7150	1986	39		883	86			
	9180	2550	28		933	75			
	4080	1133	43		637	75	4.5	900	770
	6800	1889	34.8		758	85			
	8850	2458	23.8		765	75			
	3860	1072	38.5		547	74	4.2	710	735
	6430	1786	30.7		640	84			
	8280	2300	20		601	75			
	3630	1008	33.5		453	73	4.0	630	700
	6050	1681	26.8		532	83			
	7860	2183	16.8		486	74			
	5880	1633	75.5		1530	79	7.1	2000	980
	9800	2722	62.5		1873	89			
	11600	3222	51.2		1902	85			
	5580	1550	67.5		1298	79	6.0	1800	940
	9300	2583	55		1565	89			
	11000	3056	45.2		1611	84			
	5300	1472	61.5		1123	79	5.5	1600	900
	8890	2469	49.5		1361	88			

800-970	10400	2889	41.3	725	1409	83	5.0	1400	860
	5100	1417	55.5		988	78			
	8500	2361	44.5		1184	87			
	9650	2681	38		1203	83			
	4800	1333	63		1029	80	6.8	1400	910
	8000	2222	52		1272	89			
	10450	2903	39		1337	83			
	4600	1278	58.3		924	79	5.0	1250	880
	7650	2125	47.8		1131	88			
	9950	2764	35.3		1166	82			
	4350	1208	53.2		797	79	5.0	1250	845
	7240	2011	43.2		968	88			
	9500	1639	30.5		998	79			
	4100	1139	48		687	78	4.5	1000	810
	6840	1900	39		835	87			
	8820	2450	28		862	78			
	3840	1067	44		597	77	4.0	800	780
	6400	1778	35		709	86			
	8250	2292	25		729	77			

S 泵性能参数表 PERFORMANCE PARAMETERS

螺纹连接尺寸 Thread connection dimensions

1M 压力表 Rp1/2

1M Pressure gauge Rp1/2

5D 排气孔 Rp1/2


5D Vent Rp1/2

6B 排水孔 Rp1/2

6B Drainage Rp1/2

8B 漏液排出孔 Rp1

8B Leakage liquid drain Rp1

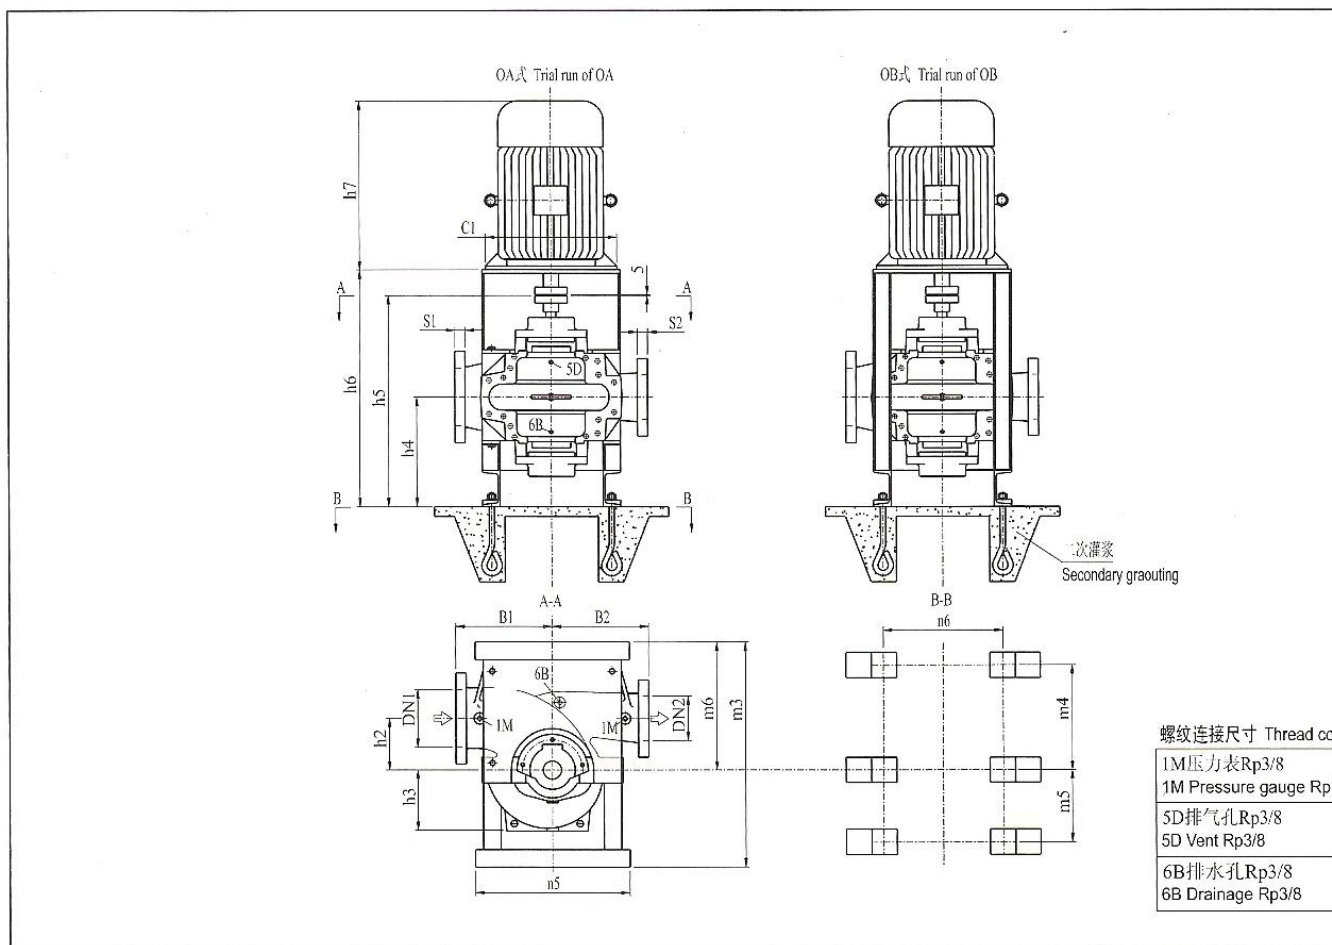


主要外形尺寸 EXTERNAL DIMENSION

泵型号 Pump type	法兰尺寸 Flange dimension(mm)				泵尺寸 Pump dimension(mm)						重量	
	DN1	DN2	S1	S2	B1	B2	h2	h3	h4	h5	泵Pump	含
80-210	125	80	26	22	300	300	140	168	400	815	195	
80-270	125	80	26	22	300	300	140	190	400	815	205	
80-370	125	80	26	22	330	330	140	225	400	815	220	

电机尺寸- Y型电机 MOTOR DIMENSION-Y TYPE MOTOR

泵型号 Pump type	结构型式 Structure model		电机型号 Motor type	电机功率 Motor Power	c1	h6	h7	m3	m4	m5	m6	n5	n6
	OA	OB											
80-210	•	—	min.100L	2.2	200	870	295	640	275	100	380	450	340
			max.200L	30	400	930	740	640	275	100	380	450	340
	—	•	min.225M	45	450	930	795	720	275	100	380	710	340
			max.225M	45	450	930	795	720	275	100	380	710	340
80-270	•	—	min.100L	3	250	880	320	640	275	100	380	450	340
			max.200L	30	400	930	740	640	275	100	380	450	340
	—	•	min.225M	45	450	930	795	720	275	100	380	710	340
			max.280S	75	550	960	1030	720	275	100	380	710	340
80-370	•	—	min.132M	7.5	300	900	395	640	275	100	380	450	340
			max.180L	22	350	930	660	640	275	100	380	450	340

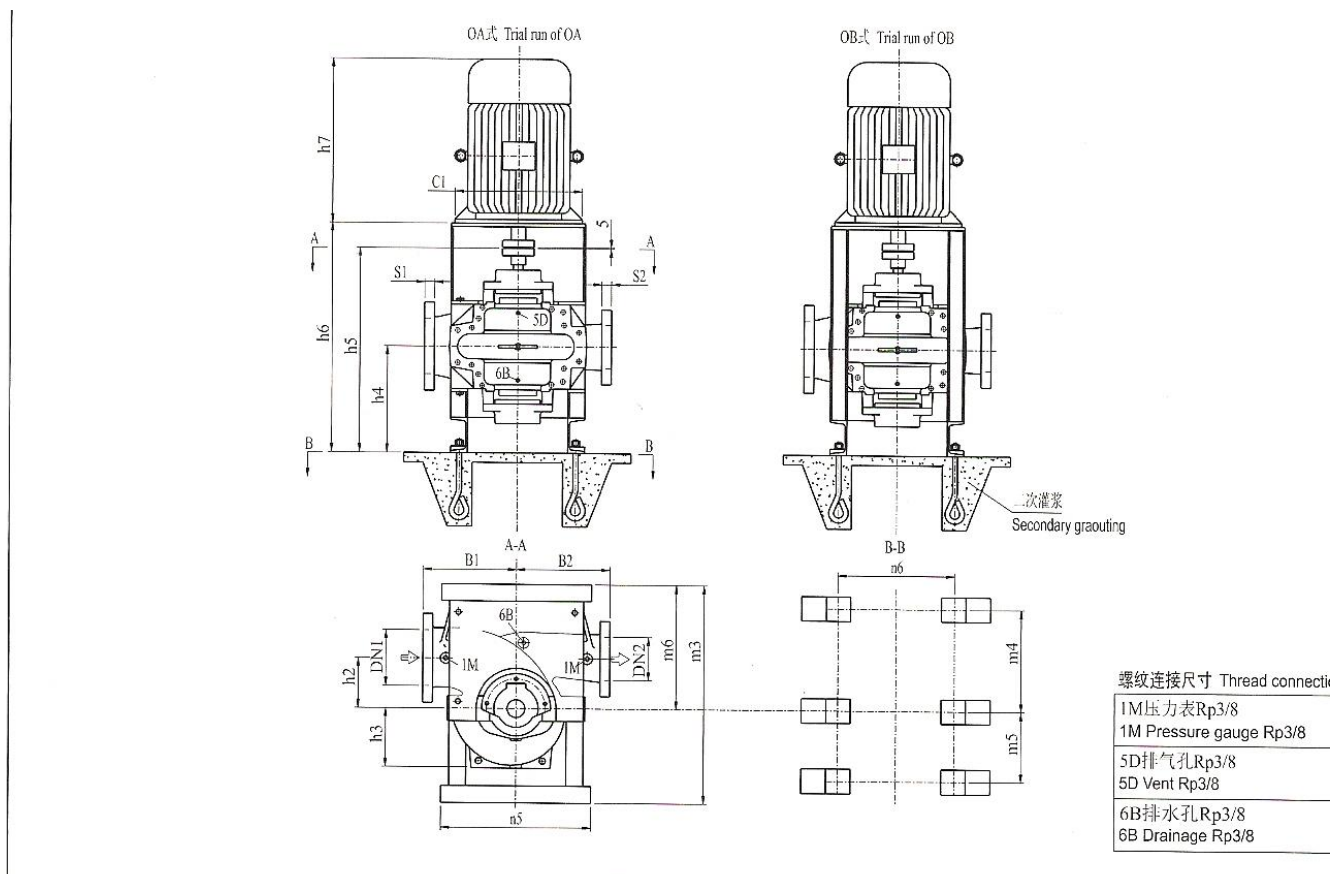


主要外形尺寸 EXTERNAL DIMENSION

泵型号 Pump type	法兰尺寸 Flange dimension(mm)				泵尺寸 Pump dimension(mm)						重量 Weight	
	DN1	DN2	S1	S2	B1	B2	h2	h3	h4	h5	泵 Pump	含水量
125-230	200	125	30	26	370	370	200	210	455	970	263	
125-290	200	125	30	26	370	370	200	230	455	970	288	
125-360	200	125	30	26	370	370	200	260	455	970	315	
125-460	200	125	30	26	450	450	200	305	455	970	352	

电机尺寸- Y型电机 MOTOR DIMENSION- Y TYPE MOTOR

泵型号 Pump type	结构型式 Structure model		电机型号 Motor type	电机功率 Motor Power	c1	h6	h7	m3	m4	m5	m6	n5	n6	M
	OA	OB												
125-230	•	—	min.132S	5.5	300	1055	395	855	360	210	475	600	450	
			max.280M	55	550	1115	1030	855	360	210	475	600	450	
	—	•	min.315S	110	660	1115	1220	855	360	210	475	860	450	
			max.315M	132	660	1115	1320	855	360	210	475	860	450	
125-290	•	—	min.132M	7.5	300	1055	435	855	360	210	475	600	450	
			max.280M	90	550	1115	1030	855	360	210	475	600	450	
	—	•	min.315S	110	660	1115	1220	855	360	210	475	860	450	
			max.315L	200	660	1115	1320	855	360	210	475	860	450	
125-360	•	—	min.160L	15	350	1085	540	855	360	210	475	600	450	
			max.280S	75	550	1115	980	855	360	210	475	600	450	
125-460	—	•	min.200L	30	400	1085	740	855	360	210	475	700	560	
			max.315M	132	660	1145	1320	855	360	210	475	700	560	

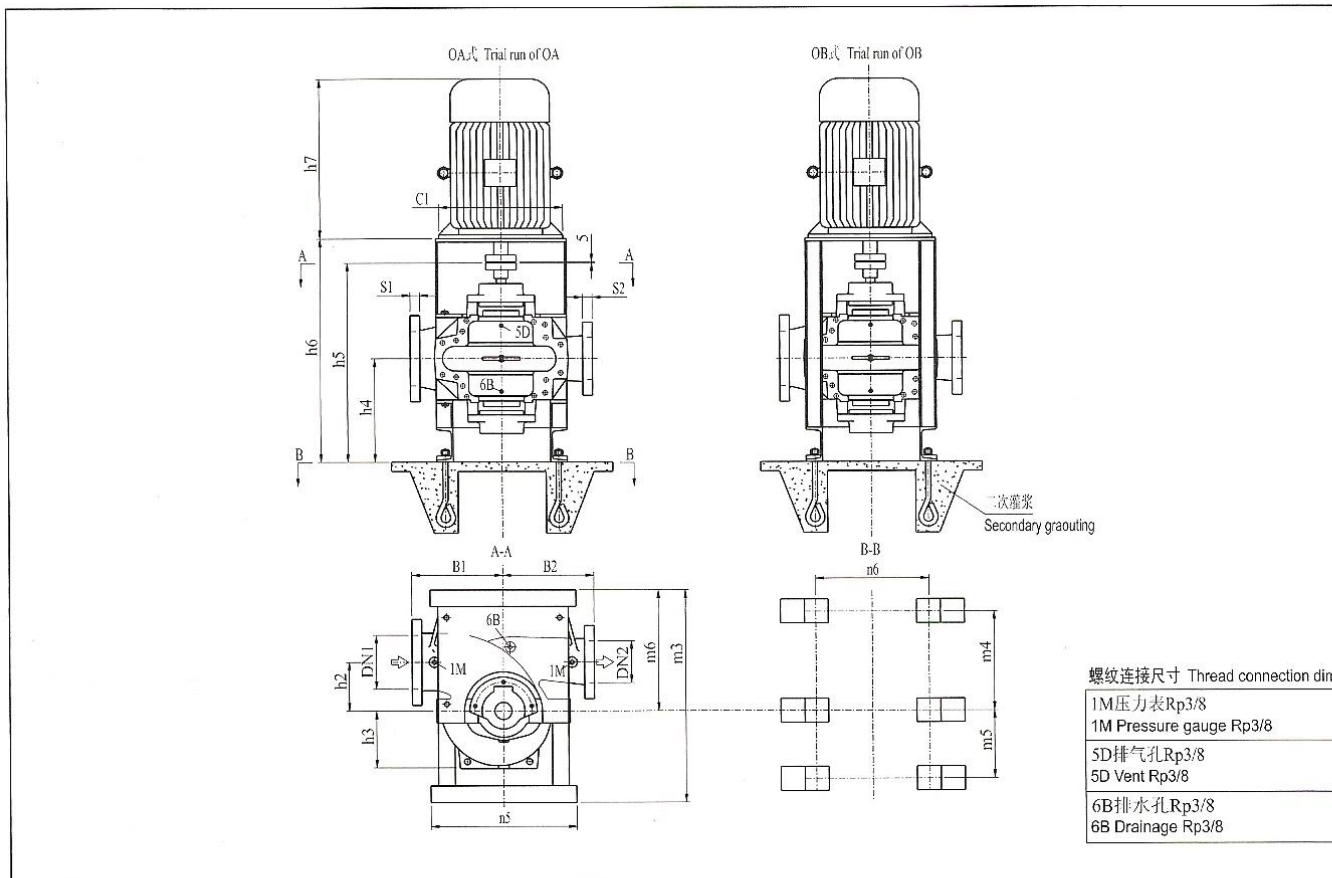

主要外形尺寸 EXTERNAL DIMENSION


泵型号 Pump type	法兰尺寸 Flange dimension(mm)				泵尺寸 Pump dimension(mm)						重量 Weight	
	DN1	DN2	S1	S2	B1	B2	h2	h3	h4	h5	泵Pump	含水量 Wa
150-290	200	150	30	26	400	400	200	245	455	970	365	5
150-360	200	150	30	26	400	400	200	265	455	970	378	6
150-460	200	150	30	26	450	450	245	305	520	1110	458	7
150-605	200	150	30	34	600	500	300	370	520	1110	678	9

电机尺寸- Y型电机 MOTOR DIMENSION-Y TYPE MOTOR

泵型号 Pump type	结构型式 Structure model		电机型号 Motor type	电机功率 Motor Power	c1	h6	h7	m3	m4	m5	m6	n5	n6	电 Moto
	OA	OB												
150-290	•	—	min.160M	11	350	1085	495	855	360	210	475	600	450	
			max.225M	45	450	1115	795	855	360	210	475	600	450	
150-360	—	•	min.180M	18.5	350	1085	620	855	360	210	475	600	450	
			max.280S	75	550	1115	980	855	360	210	475	600	450	
150-460	•	—	min.200L	30	400	1215	740	855	360	210	475	700	560	
			max.315L	200	660	1285	1320	855	360	210	475	700	560	
150-605	—	•	min.250M	55	550	1245	895	1060	460	315	575	900	700	
			max.3552 ¹⁾	250	1150	1315	1710	1060	460	315	575	900	700	
	•	—	min.3553 ¹⁾	280	1150	1315	1710	1340	460	315	575	1300	700	
			max.3554 ¹⁾	315	1150	1315	1710	1340	460	315	575	1300	700	

¹⁾电机电压为6KV。

¹⁾Voltage of motor is 6KV.

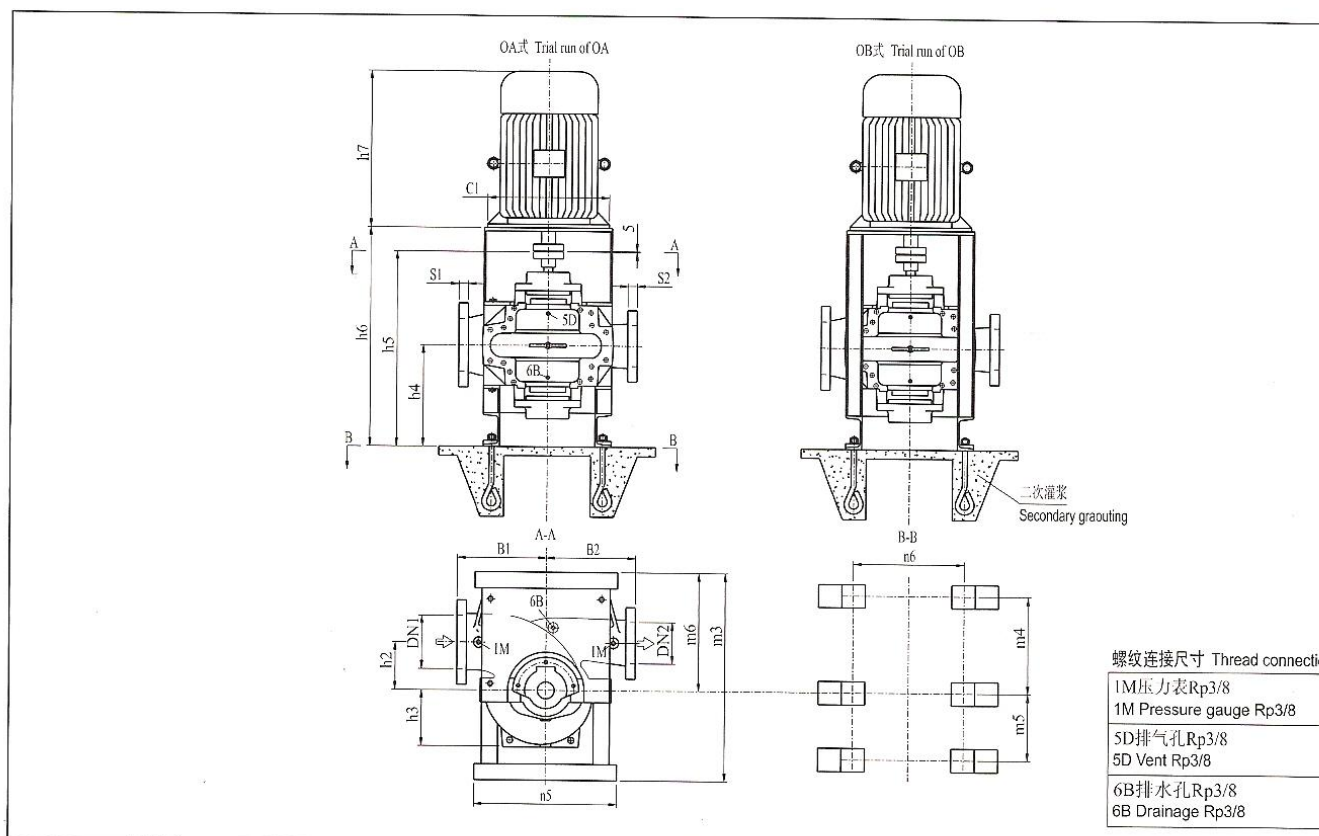

主要外形尺寸 EXTERNAL DIMENSION


泵型号 Pump type	法兰尺寸 Flange dimension(mm)				泵尺寸 Pump dimension(mm)						重量 Weight	
	DN1	DN2	S1	S2	B1	B2	h2	h3	h4	h5	泵Pump	含水量
200-320	250	200	32	30	450	450	240	285	520	1110	472	
200-420	250	200	32	30	500	500	240	310	520	1110	542	
200-520	250	200	32	30	600	500	300	370	600	1255	882	
200-670	250	200	32	34	650	550	350	430	600	1255	1040	

电机尺寸- Y型电机 MOTOR DIMENSION- Y TYPE MOTOR

泵型号 Pump type	结构型式 Structure model		电机型号 Motor type	电机功率 Motor Power	c1	h6	h7	m3	m4	m5	m6	n5	n6	Motor
	OA	OB												
200-320	•	—	min.200L	30	400	1225	740	1060	460	315	575	700	560	
			max.280M	90	550	1255	1030	1060	460	315	575	700	560	
200-420	—	•	min.225S	37	450	1255	770	1060	460	315	575	700	560	
			max.315L	200	660	1285	1320	1060	460	315	575	700	560	
200-520	•	—	min.280S	75	550	1400	980	1120	520	315	635	900	700	
			max.YL3552 ¹⁾	250	1150	1470	1710	1120	520	315	635	900	700	
	—	•	min.YL3553 ¹⁾	280	1150	1470	1710	1400	520	315	635	1300	700	
			max.YL4002 ¹⁾	400	1150	1470	1850	1400	520	315	635	1300	700	
200-670	•	—	min.315S	-	660	1430	1220	1180	560	315	685	900	700	
			max.YL3552 ¹⁾	-	1150	1470	1710	1180	560	315	685	900	700	
	—	•	min.YL3553 ¹⁾	-	1150	1470	1710	1460	560	315	685	1300	700	
			max.YL4005 ¹⁾	-	1150	1470	1850	1460	560	315	685	1300	700	

¹⁾电机电压为6KV.

¹⁾Voltage of motor is 6KV.

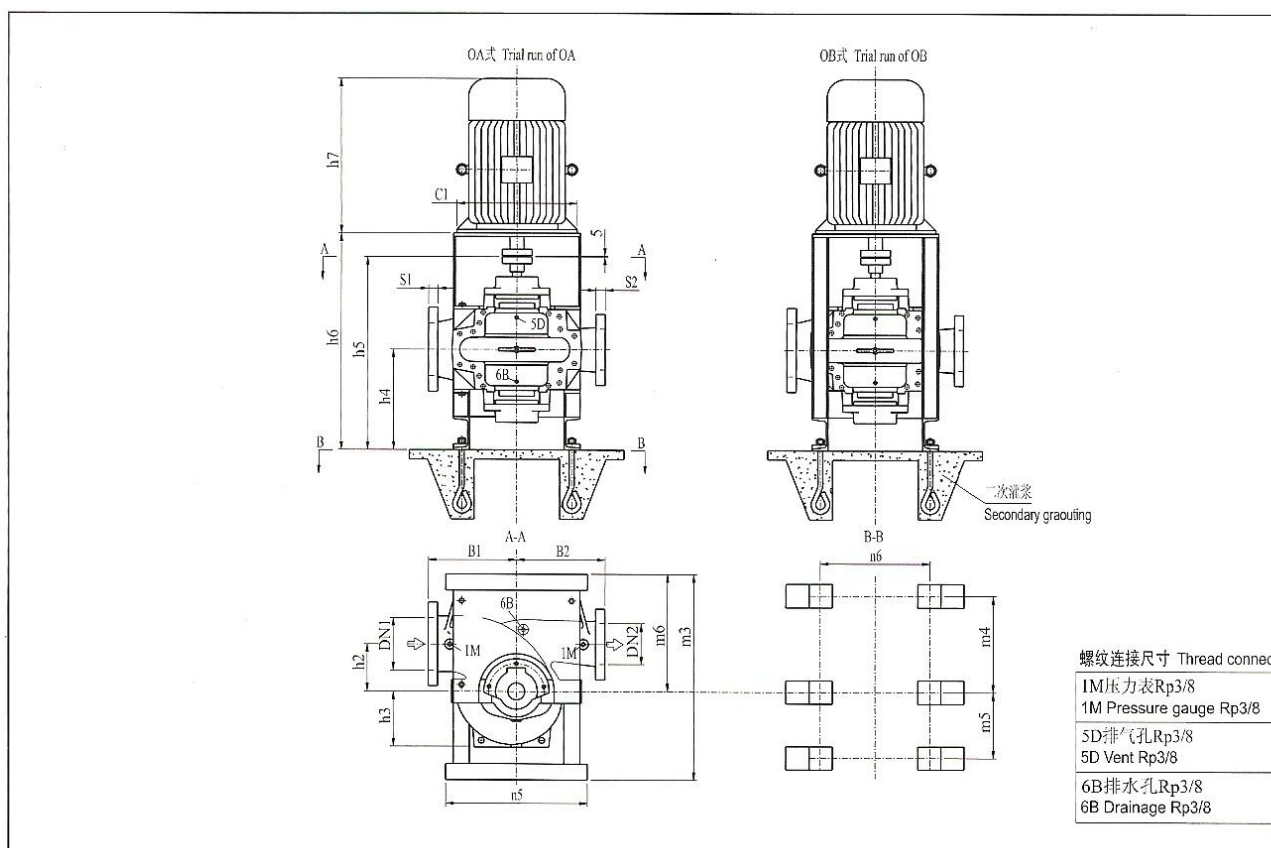

主要外形尺寸 EXTERNAL DIMENSION


泵型号 Pump type	法兰尺寸 Flange dimension(mm)				泵尺寸 Pump dimension(mm)						重量 Weight	
	DN1	DN2	S1	S2	B1	B2	h2	h3	h4	h5	泵 Pump	含水 Water
250-370	300	250	32	32	500	500	300	320	600	1255	732	
250-480	300	250	32	32	550	550	300	355	680	1410	912	
250-600	300	250	32	36	650	550	350	415	680	1410	1336	

电机尺寸- Y型电机 MOTOR DIMENSION- Y TYPE MOTOR

泵型号 Pump type	结构型式 Structure model		电机型号 Motor type	电机功率 Motor Power	c1	h6	h7	m3	m4	m5	m6	n5	n6
	OA	OB											
250-370	•	—	min.280S	75	550	1400	980	1180	560	315	685	900	700
			max.315L	200	660	1430	1320	1180	560	315	685	900	700
250-480	—	•	min.280M	90	550	1555	1030	1180	560	315	685	900	700
			max.YL3552 ¹⁾	250	1150	1625	1710	1180	560	315	685	900	700
	•	—	min.YL3553 ¹⁾	280	1150	1625	1710	1460	560	315	685	1300	700
			max.YL4001 ¹⁾	355	1150	1625	1850	1460	560	315	685	1300	700
250-600	—	•	min.315M	132	660	1585	1320	1210	590	315	715	900	700
			max.YL3552 ¹⁾	250	1150	1625	1720	1210	590	315	715	900	700
	•	—	min.YL3553 ¹⁾	280	1150	1625	1710	1490	590	315	715	1300	700
			max.YL4502 ¹⁾	710	1250	1625	2000	1490	590	315	715	1300	700

¹⁾电机电压为6KV。

¹⁾Voltage of motor is 6KV.

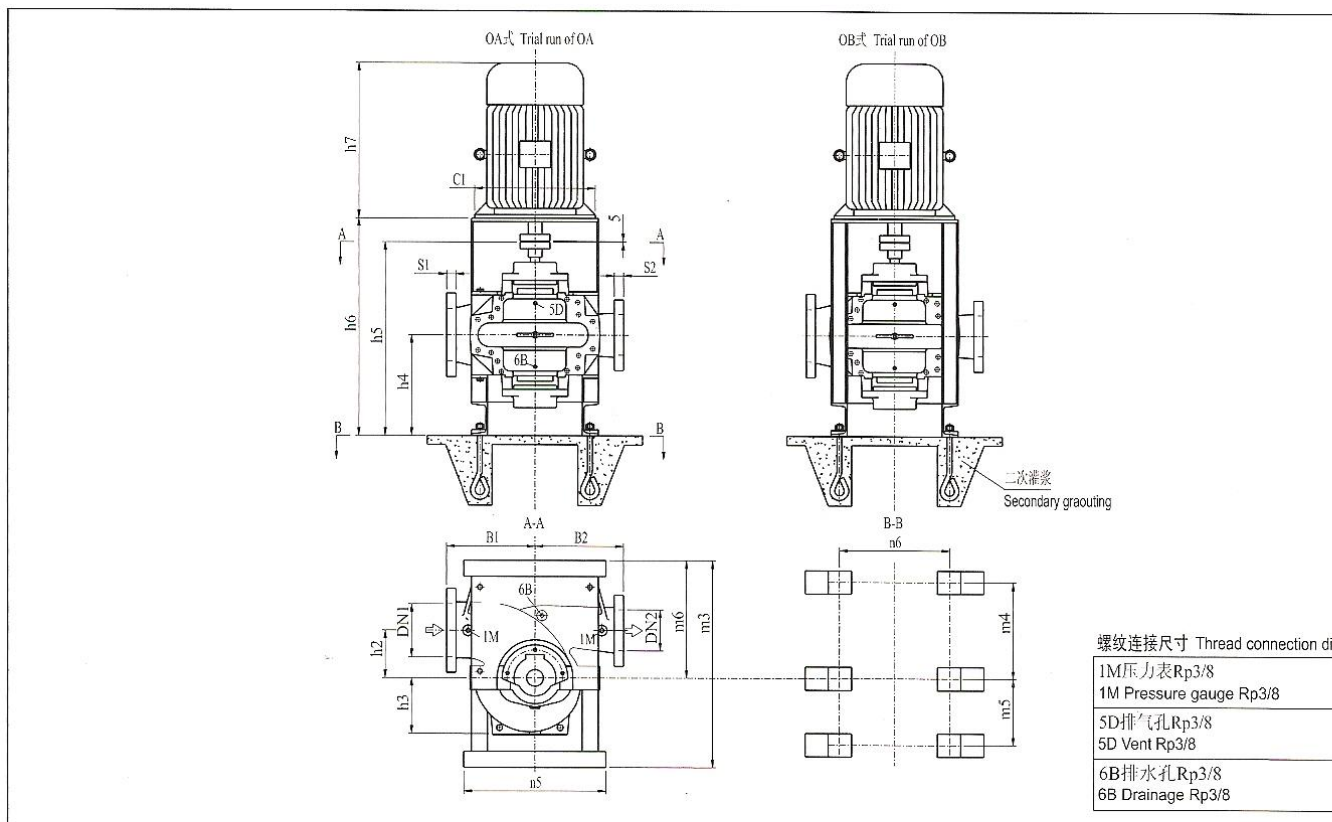

主要外形尺寸 EXTERNAL DIMENSION


泵型号 Pump type	法兰尺寸 Flange dimension(mm)				泵尺寸 Pump dimension(mm)						重量 Weight	
	DN1	DN2	S1	S2	B1	B2	h2	h3	h4	h5	泵Pump	含水量Wa
300-300	350	300	36	32	550	50	300	360	600	1255	692	10
300-435	400	300	38	32	650	550	350	365	680	1410	996	19
300-560	400	300	38	32	700	650	350	430	750	1560	1568	23
300-700	400	300	38	40	750	650	400	480	750	1640	1860	27

电机尺寸- Y型电机 MOTOR DIMENSION- Y TYPE MOTOR

泵型号 Pump type	结构型式 Structure model		电机型号 Motor type	电机功率 Motor Power	c1	h6	h7	m3	m4	m5	m6	n5	n6	电 Motor
	OA	OB												
300-300	•	—	min.225S	37	440	1370	1220	1210	590	315	715	900	700	
			max.315S	110	660	1430	1220	1210	590	315	715	900	700	
300-435	—	•	min.280M	90	550	1655	1030	1250	630	315	755	900	700	
			max.YL3552 ¹⁾	250	1150	1625	1710	1250	630	315	755	900	700	
	•	—	min.YL3553 ¹⁾	280	1150	1625	1710	1530	630	315	755	1300	700	
			max.YL4002 ¹⁾	400	1150	1625	1850	1530	630	315	755	1300	700	
300-560	—	•	min.315L	200	660	1735	1320	1375	670	400	795	1200	950	
			max.YL4503 ¹⁾	800	1250	1775	2000	1375	670	400	795	1200	950	
300-700	•	—	min.YL355-4	400	1150	1595	1710	1415	710	400	835	1200	950	
			max.YL450-4	900	1250	1595	2000	1415	710	400	835	1200	950	
	—	•	min.YL450-4	630	1250	1595	2000	1610	710	400	835	1300	950	
			max.YL500-4	1120	1400	1635	2100	1680	710	400	835	1400	950	

¹⁾电机电压为6KV。

¹⁾Voltage of motor is 6KV.

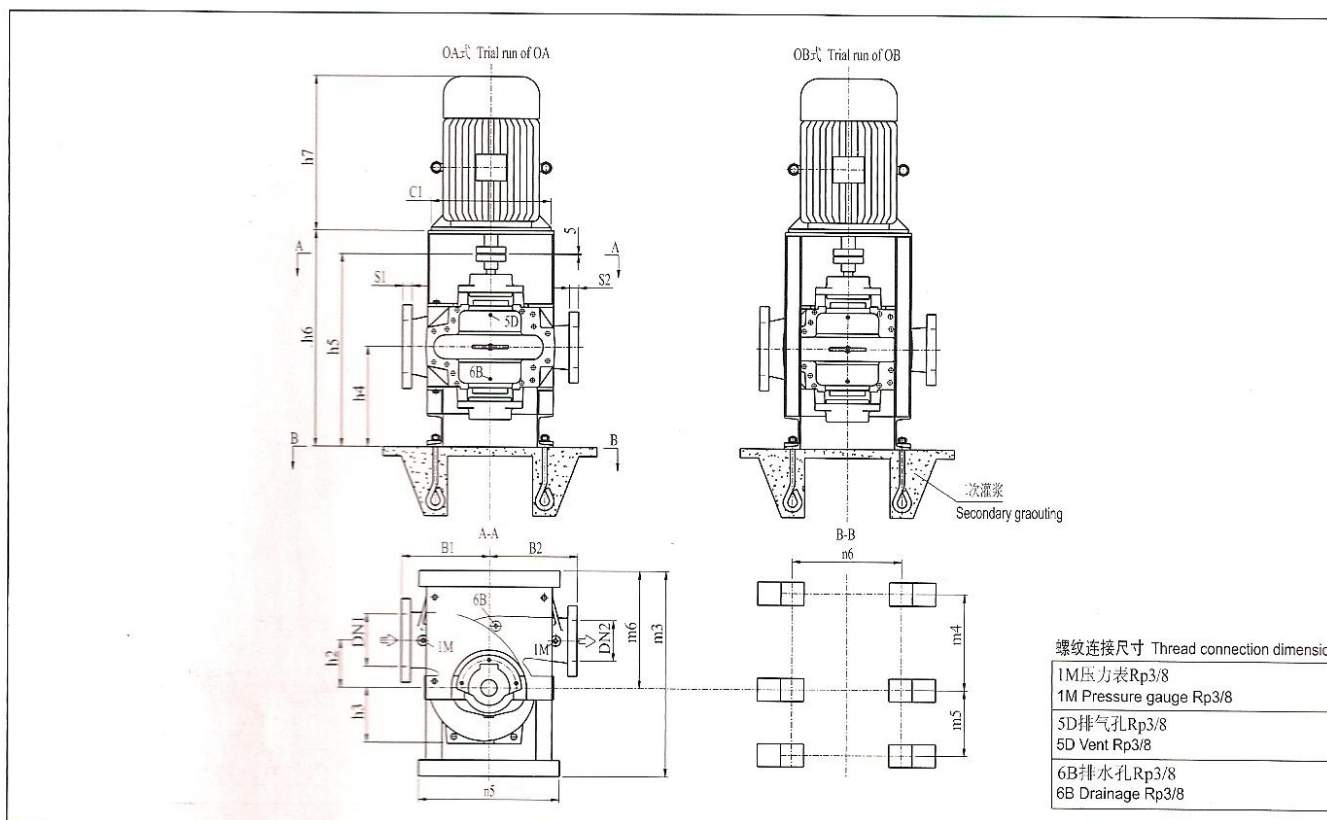

主要外形尺寸 EXTERNAL DIMENSION

泵型号 Pump type	法兰尺寸 Flange dimension(mm)				泵尺寸 Pump dimension(mm)						重量 Weight(kg)	
	DN1	DN2	S1	S2	B1	B2	h2	h3	h4	h5	泵Pump	含水量 Water co
350-360	400	350	38	36	650	550	350	410	680	1410	952	160
350-430	450	350	40	36	750	650	400	465	750	1560	1412	240
350-510	400	350	38	36	700	650	400	420	750	1560	1535	290

电机尺寸- Y型电机 MOTOR DIMENSION- Y TYPE MOTOR

泵型号 Pump type	结构型式 Structure model		电机型号 Motor type	电机功率 Motor Power	c1	h6	h7	m3	m4	m5	m6	n5	n6	电机重 Motor weight
	OA	OB												
350-360	.	—	min.250M	55	550	1555	895	1250	630	315	755	900	700	427
			max.315L	200	660	1585	1320	1250	630	315	755	900	700	1220
	—	.	min.YL3551 ¹⁾	220	1150	1625	1710	1530	630	315	755	1300	700	2280
			max.YL3551 ¹⁾	220	1150	1625	1710	1530	630	315	755	1300	700	2280
350-430	.	—	min.315M	132	660	1735	1320	1415	710	400	835	1200	950	1100
			max.YL3552 ¹⁾	250	1150	1775	1710	1415	710	400	835	1200	950	2330
	—	.	min.YL3553 ¹⁾	280	1150	1775	1710	1610	710	400	835	1300	950	2490
			max.YL4003 ¹⁾	450	1150	1775	1850	1610	710	400	835	1300	950	3060
350-510	.	—	min.YL3554 ¹⁾	315	1150	1775	1710	1415	710	400	835	1200	950	2650
			max.YL4503 ¹⁾	800	1250	1775	2000	1415	710	400	835	1200	950	3520

¹⁾电机电压为6KV。

¹⁾Voltage of motor is 6KV.